PROPOSED RESIDENCE DEVELOPMENT FOR Mr.CADER AT LAKE GARDENS

CONSTRUCTION DRAWINGS

AJITH ASSOCIATION
STRUCTURAL | CIVIL ENGINEERS

AJITH WIJEBANDARA
CHARTERED CIVIL ENGINEER.

166/1, PALLEMULLA, HALOLUWA
KANDY,
SRI LANKA.
e : ajith.ceng@gmail.com
t : +94 77 397 612 9, +94 81 455 030 0

GENERAL NOTES

1. ALL DIMENSION ARE IN MILLIMETERS AND ALL ELEVATION ARE IN METERS UNLESS NOTED OTHERWISE.
2. DO NOT SCALE, USE WRITTEN DIMENSION.
3. ALL STRUCTURAL DRAWINGS SHELL BE READ IN CONJUNCTION WITH SPECIFICATION. LANDSCAPE, ARCHITECTURAL, MECHANICAL, PLUMBING, ELECTRICAL DRAWINGS, AND ANY OTHER WRITTEN INSTRUCTIONS THAT MAY BE ISSUED DURING THE COURSE OF THE CONTRACT.
4. ALL DIMENSION SHALL BE VERIFIED BY THE CONTRACTOR BEFORE CONSTRUCTION AND ON SITE. ANY DISCREPANCY SHALL BE REPORTED TO THE ENGINEER FOR REMEDIAL MEASURE BEFORE COMMUNICANT OF RELATED WORK.
5. IT IS CONTRACTOR'S RESPONSIBILITY TO MAINTAIN THE STRUCTURE DURING CONSTRUCTION IN A STABLE CONDITION
6. AT ALL TIMES AND ASSUME THAT NO PART SHALL BE OVERSTRESSED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROPER SETTING OUT OF WORKS. FOR CORRECTNESS OF POSITION, LEVELS AND ALIGNMENTS OF ALL PARTS OF THE WORK, AND FOR QUALITY AND FINAL FINISHES AT ANY TIME DURING THE PROGRESS OF WORKS.
7. IF ANY ERROR IS DETECTED IN ANY PART, THE CONTRACTOR SHALL RECTIFY IT AT HIS OWN EXPENSE, THE CHECKING/APPROVAL DONE BY THE ENGINEER SHALL NOT IN ANY WAY RELIVE THE CONTRACTOR FROM HIS RESPONSIBILITIES.
8. SUBSTITUTIONS MUST BE APPROVED BY THE ENGINEER.

2. MATERIALS

1. ALL MATERIALS TO BE USED IN THE CONJUNCTION SHALL COMPLY WITH THE REQUIREMENTS OF CURRENT RELEVANT BRITISH STANDARDS AND THE SPECIFICATION UNLESS NOTED BELOW.

3. UNLESS OTHERWISE NOTED CONCRETE SHALL BE

1. BLINDING CONCRETE GRADE 15/20 SULPHATE RESISTING CEMENT CONTENT 200Kg/m3 MINIMUM. MAXIMUM AGGREGATE SIZE 25mm.
2. SUBSTRUCTURE- GRADE 30. 28 DAYS CHARACTERISTIC CUBE STRENGTH 30 N/mm2,
3. SUPER STRUCTURE - GRADE 25 28 DAYS CHARACTERISTIC CUBE STRENGTH 25 N/mm2 MAXIMUM AGGREGATE SIZE 20mm. MAXIMUM FREE WATER / CEMENT RATIO 0.50.
4. ALL REINFORCED CONCRETE IS TO MADE FROM CEMENT, FINE AGGREGATE (SAND AND CRUSHER FINES) COARSE, AGGREGATE (10mm TO 20mm) AND WATER.

4. REINFORCEMENT

1. 'T' DENOTES HOT ROLLED DEFORMED HIGH YIELD BOND STEEL REINFORCEMENT, CHARACTERISTIC STRENGTH 500 N/mm2. BS 4449
2. 'R' DENOTES ROUND MILD STEEL REINFORCEMENT CHARACTERISTIC STRENGTH 250 N/mm2. SLS 26
3. SPACER BARS IN BEAMS SHALL BE T25-1000mm C/C. CHAIRS IN SLABS SHALL BE T10-1000mm C/C. TIES IN WALLS SHALL BE T10-1000mm C/C. (SHAPE CODE 38)
4. CONCRETE COVER TO OUTER REINFORCEMENT IS TO BE :-

SUB STRUCTURE		SUPER STRUCTURE	
PILE	- 75mm	COLUMNS	- 25mm
FOUNDATION	- 50mm ALL FACES	WALLS	- 25mm
TIE BEAMS	- 40mm ALL FACES	BEAMS	- 25mm SIDES, TOP & BOTTOM
COLUMNS	- 30mm	SLAB	- 25mm TOP & BOTTOM
WALLS	- 30mm		- 30mm TOP FOR EXPOSED SURFACES

4.7 REINFORCEMENT LAP LENGTHS ARE TO BE :-
TENSION - 55 TIMES DIAMETER OF SMALLER LAPPED BAR (NON EPOXY BARS)
40 TIMES DIAMETER OF SMALLER LAPPED BAR (UNCOATED BARS)
COMP'N. - 30 TIMES DIAMETER OF SMALLER LAPPED BAR (NON EPOXY BARS)
REINF'T - 30 TIMES DIAMETER OF SMALLER LAPPED BAR (UNCOATED BARS)
- 300 mm FOR MESH REINFORCEMENT.
REINF'T - OR AS SHOWN ON REINFORCEMENT DRAWINGS.

5. CEMENT BLOCKS FOR WALLS & SLABS (ONLY IF APPLICABLE)

5.1 SAMPLING AND TESTING OF BLOCKS AS PER THE BS 6073 PART 1.
5.2 COMPRESSIVE STRENGTH OF BLOCKS HAVE TO BE ACCORDENCE WITH SLS 855
5.3 MORTAR IS TO BE 1 : 5 CEMENT : SAND ONLESS OTHERWISE STATED.

6. FOUNDATIONS

1. EXCAVATIONS FOR FOUNDATIONS SHALL BE CARRIED OUT BY MECHANICAL MEANS, EXCEPT FOR THE LAST 200mm OF EXCAVATION WHICH IS TO BE CARRIED OUT BY MANUAL METHODS.
2. ASSUMED SAFE BEARING PRESSURE BELOW PAD AND STRIP FOUNDATIONS IS REF. TO SOIL REPORT, THE DEPTH SHOWN ON THE DRAWINGS, SHOULD A SUITABLE BEARING LAYER NOT BE FOUND AT THE DEPTH SHOWN THE EXCAVATION SHALL CONTINUED DOWN TO A DEPTH DEEMED SUITABLE BY THE ENGINEER, AND BACK FILLED WITH CONCRETE GRADE 10/20 OR AS DIRECTED BY THE ENGINEER UP TO THE LEVEL, SHOWN ON THE DRAWINGS.
3. FORMATION LEVELS OF FOUNDATIONS SHALL BE DETERMINED BY THE ENGINEER BASED UPON EXISTING ROAD LEVELS, WATER TABLE LEVEL, SERVICES REQUIREMENTS, AND SHALL BE SUBJECT TO A MINIMUM DEPTH AS SHOWN IN FIGURE 1 OR AS PER THE DRAWING .
4. THE FORMATION LEVELS OF FOUNDATIONS SHALL BE WATERED AND MECHANICALLY COMPACTED PRIOR TO PLACING BLINDING CONCRETE.
5. THE FORMATION LEVELS OF FOUNDATIONS ARE TO BE INSPECTED AND APPROVED BY THE ENGINEER BEFORE BLINDING CONCRETE IS PLACED.
6. A 50mm LAYER OF BLINDING CONCRETE GRADE 15/15 IS TO BE PLACED UNDER ALL RAFT FOUNDATIONS.

7. FOUNDATION ADJACENT TO EXISTING STRUCTURES

1. THE CONTRACTOR IS TO EXCAVATE TRIAL PITS NEXT TO EXISTING FOUNDATIONS TO DETERMINE THE NATURE AND LEVEL OF EXISTING FOUNDATIONS.
2. THE CONTRACTOR IS TO INFORM THE ENGINEER OF THE NATURE AND LEVEL OF EXISTING FOUNDATIONS, THE ENGINEER WILL MODIFY THE PROPOSED FOUNDATION DETAILS AS REQUIRED.
3. THE CONTRACTOR IS TO TAKE ALL PRECAUTIONS TO ENSURE THE INTEGRITY OF NEIGHBORING PROPERTY DURING EXCAVATIONS AND THE CONSTRUCTION OF THE WORKS.

8. FOUNDATIONS OF MAIN STRUCTURE ADJACENT TO UNDERGROUND STRUCTURES

1. EXCAVATION AND CONSTRUCTION OF FOUNDATIONS AROUND UNDERGROUND STRUCTURES (SEPTIC TANKS, SOAK WAYS, MANHOLES, UNDERGROUND WATER TANKS AND THE LIKE) SHALL PROCEED CONCURRENTLY WITH THE CONSTRUCTION OF THE UNDERGROUND STRUCTURES.

9. CONCRETE WORKMANSHIP

1. ALL DAY WORK AND CONSTRUCTION JOINTS IN CONCRETE MEMBERS SHALL BE AT PREDETERMINED LOCATIONS AS APPROVED BY THE ENGINEER.
2. VERTICAL JOINTS SHALL BE FORMED WITH TIMBER FORM WORK COATED WITH AN APPROVED SURFACE RE TRADER, THE VERTICAL FACE IS TO BE WASHED TO EXPOSE THE AGGREGATE BEFORE FINAL SET OF THE CONCRETE HAS TAKEN PLACE.
3. HORIZONTAL JOINTS SHALL BE SCRABBLED TO REMOVE ALL ALLIANCE AND WEAK CONCRETE BEFORE CONCRETE FOR THE NEXT LIFT IS PLACED.
4. ALL UN PLASTERED CONCRETE IS TO BE FAIR FACE FINISH UNLESS NOTED TO THE CONTRACT. HONEY COMBED HAVE TO BE FINISH WITH APPROVED CONSTRUCTION GROUT AS PER THE GUIDANCE OF THE ENGINEER.
5. ALL CONCRETE SURFACES TO RECEIVE PLASTER ARE TO BE HACKED TO PROVIDE AN ADEQUATE SURFACE KEY.
6. ALL CONCRETE IS TO BE CURED BY AN APPROVED METHOD-WATER PONDING, POLYTHENE/HESSIAN SHEET, CURING COMPOUND.

10. R.C. WALLS FOR BASEMENTS, SWIMMING POOLS AND U.G. WATER TANKS

1. THE CONTRACTOR IS TO VERIFY THE LEVEL OF THE WATER TABLE ON SITE AND COMPARE THIS WITH THE ASSUMED WATER TABLE LEVEL SHOWN ON THE DRAWINGS, IN THE EVENT THAT THE SITE WATER TABLE IS HIGHER, THE BASE SLAB THICKNESS WILL BE INCREASED BY A SUITABLE AMOUNT TO COMPENSATE FOR HYDROSTATIC UPLIFT.
2. CONCRETE COVER TO MAIN REINFORCEMENT IS TO BE :- WATER RETAINING FACES - 50 mm EXPOSED AND EARTH RETAINING FACES - 40 mm
3. WATER BARS ARE TO BE INCORPORATED IN ALL VERTICAL AND HORIZONTAL CONSTRUCTION JOINTS AND HAVE TO TAKE PRIOR APPROVAL BEFORE PLACE.
4. ALL WALL KICKERS ARE TO BE CAST MONOLITHICALLY WITH THE BASE SLAB.
5. UNLESS OTHERWISE SHOWN ON THE DRAWINGS THE WATER TANK SHALL BE INTERNALLY PLASTERED WITH TWO COATS OF APPROVED WATERPROOF PLASTER AND PAINTED WITH TWO COATS OF 2 PART NON-TOXIC EPOXY PAINT OR SMOOTH CEMENT PLASTERING.

11. R.C. RETAINING WALLS

1. R.C. RETAINING WALLS SHALL HAVE 20mm WIDE MOVEMENT JOINT AS SHOWN IN FIGURE 2 AT A MAXIMUM OF 6.0 METER CENTERS.
2. RETAINING WALLS SHALL BE PROVIDED WITH DRAINAGE OR WEEP HOLES AS PER THE APPROVAL OF THE ENGINEER.

12. GROUND BEARING SLABS

1. BACKFILL IS TO COMPRISE SELECTED GRANULAR MATERIAL PLACED IN LAYERS 150mm THICK AND COMPACTED TO A MINIMUM OF 95% OF MAXIMUM DRY DENSITY.
2. GENERAL ARRANGEMENT TO BE SATISFY FIGURE 3.

13. NON-STRUCTURAL BLOCKWORK

1. UNLESS SHOWN TO THE CONTRARY ON THE DRAWINGS, ALL 200mm THICK BLOCK WALL PANELS EXCEEDING 12 m2 IN AREA SHALL BE PROVIDED WITH RESTRAINTS AS SHOWN IN FIGURES 5
2. UNLESS SHOWN TO THE CONTRARY ON THE DRAWINGS, ALL 150mm THICK & 100mm THICK BLOCK WALL PANELS EXCEEDING 8 m2 IN AREA SHALL BE PROVIDED WITH RESTRAINTS AS SHOWN IN FIGURES 5
3. HORIZONTAL AND VERTICAL CHASES IN BLOCK WALLS WILL BE PERMITTED ONLY WITH THE APPROVAL OF THE ENGINEER AND OTHERWISE HAVE TO PROVIDE.FLOATER COLUMN WITH 2T10 BARS IN 100MM THK. AND SAME WIDTH OF WALL

14. STEEL WORK

1. ALL STEEL FRAME MEMBERS (EXCEPT BOLTS AND FASTENERS) HAVE TO APPLY TWO COAT OF ANTICOROSSIVE PAINT AND TWO COAT OF ENAMEL PAINT UNLESS SPECIFIED
2. PRIOR TO PAINTING MEMBERS ARE MUST BE FREEFORM RUST, OIL, DUST AND OTHER PARTICLES
3. WELDED AREA AND IN FASTENERS HOLES TO BE APPLY ADDITIONAL STRIP COAT
4. ALL FASTENERS AND BOLT TO BE GALVANIZED
5. THE CORRECT SIZE AND GRADE OF BOLT SHOULD BE SELECT AS NOTED IN DETAIL
6. CONTINUOUS MACHINE SUBMERGED ARC WELDING (S.A.W.) MEET THE APPLICABLE REQUIREMENTS OF THE AMERICAN WELDING SOCIETY (A.W.S.)D1.1-1996.

7.STRENGTH OF MATERIALS

HOT ROLLED SECTION- S43 (275N/mm2)
"Z" OR "C" PURLING - 550N/mm2 High strength
ANCHOR BOLT - 450N/mm2


ABBREVIATIONS / SYMBOLS :

GENERAL

REINFORCED CONCRETE	---	RC
BLOCKWORK	---	BLK
BRICKWORK	---	BRK
DRAWING	---	DRG
NOT TO SCALE	---	NTS
DIAMETER	---	DIA / Ø
CENTRES	---	CRS
FINISHED FLOOR LEVEL	---	FFL
STRUCTURAL FLOOR LEVEL	---	SFL
EXISTING LEVEL	---	EL
HORIZONTAL	---	H
VERTICAL		V

RELATING TO REINFORCEMENT

BOTTOM FACE (OUTER LAYER)	---	B1
BOTTOM FACE (SECOND LAYER)	---	B2
TOP FACE (OUTER LAYER)	---	T1
TOP FACE (SECOND LAYER)	---	T2
STRUCT'L. LEVEL (ON PLAN)	---	+ 3000 SFL OR + 3000
FINISHED FLOOR LEVEL (ON PLAN)	---	+ 3000 FFL
RC SLAB THICKNESS	---	200 THK. OR 200 mm / + 3000 FFL
STRUCT'L. LEVEL (ELEVATION/SECTION)	---	+ 3000 SFL
GROUND LEVEL (ELEVATION/SECTION)	---	GROUND LEVEL



CONSTRUCTION ISSUE

PROJECT :
PROPOSED RESIDENCE DEVELOPMENT FOR Mr.CADER AT LAKE GARDENS


DRAWING TITLE :
GENERAL NOTES

STRUCTURAL ENGINEERING CONSULTANT :
AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Haloluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541


DATE: 11 AUG 2025
SHEET NO: S-0A
SCALE: AS GIVEN
PROJECT NO: SD-716
REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

TYPICAL ELEVATION OF CONTINUOUS BEAMS

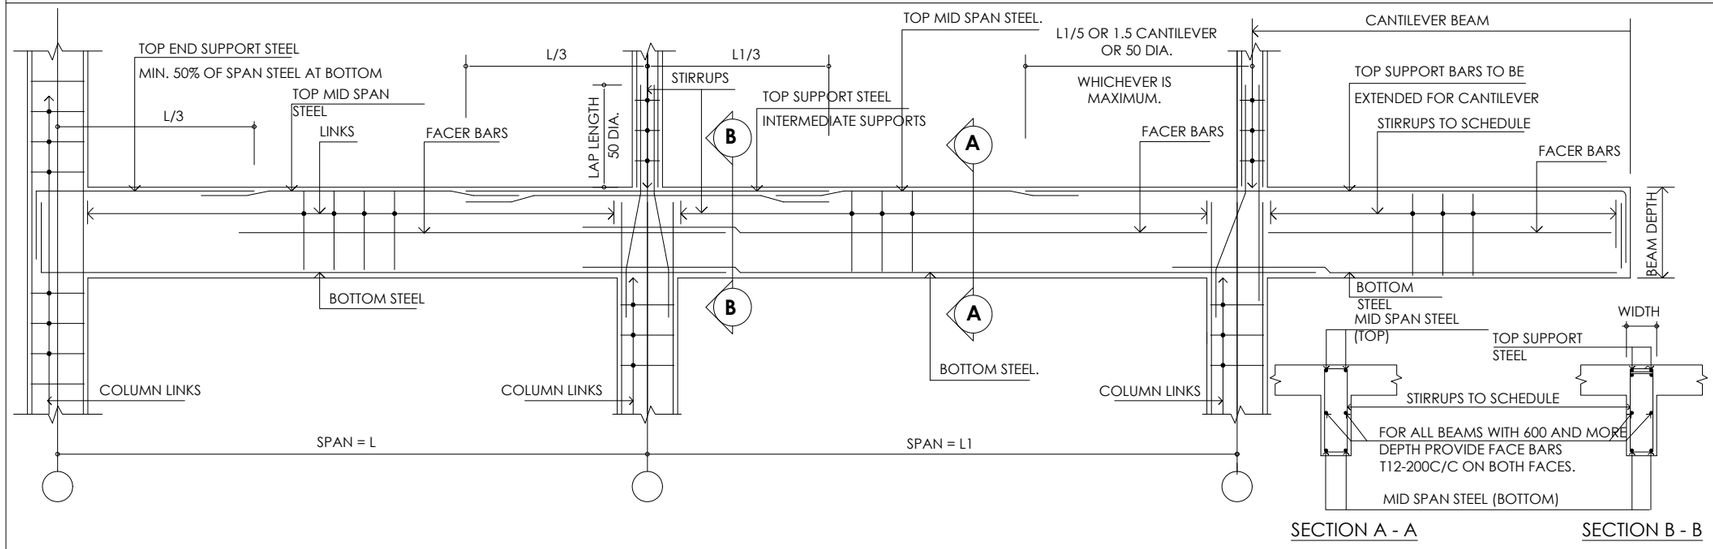

TYPICAL DETAILS OF LINTEL (NON LOAD BEARING BLOCK WALLS)

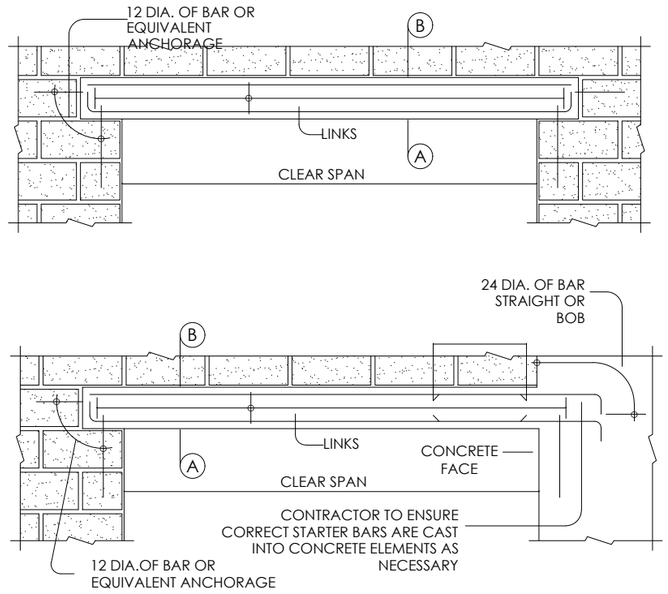

CLEAR SPAN		LINTEL SIZE		REINFORCEMENT		
		WIDTH	DEPTH	TOP (B)	BOTTOM	(A)LINKS
	2.50M	WALL THK	150mm	2-T10	2-T10	R6@125
> 2.50M	4.50M	WALL THK	200mm	2-T10	2-T12	R6@125
> 4.50M	6.50M	WALL THK	300mm	2-T12	2-T16	R6@125
SILL BEAM		WALL THK	75mm	-	2-T8	-

SCHEDULES OF LINTEL

NOTES:

1. BEARING ON BLOCK WALL ON EITHER SIDE OF OPENING SHALL BE AT LEAST 450mm
2. OVERALL LINTEL DEPTHS COULD BE INCREASED TO SUIT BLOCK WORK COURSING
3. PROVIDE SIL BEAM OF 75mm THICK WITH 2T8 FOR ALL WINDOWS WITH 450mm MINIMUM BEARING LENGTH ON WALL OR EXTEND TO ADJACENT COLUMN.

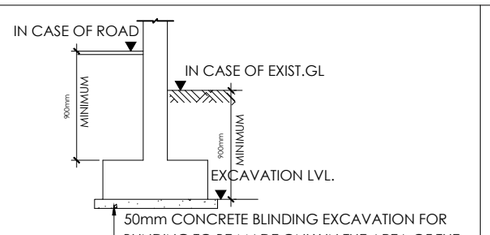


FIGURE - 1

(FOUNDATION FORMATION LEVEL)

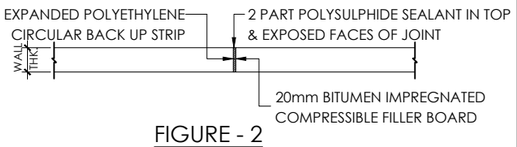


FIGURE - 2

MOVEMENT JOINT DETAIL (RETAINING WALLS)

(MAXIMUM CENTRES 18.0 METRES)

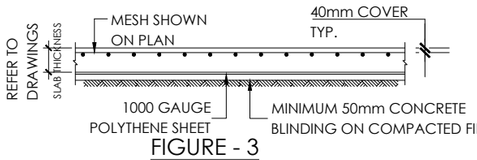


FIGURE - 3

TYPICAL DETAILS OF GROUND FLOOR SLAB

MINIMUM BEND DIAMETERS

1.DIAMETER OF BEND MEASURED ON THE INSIDE OF THE BAR, OTHER THAN FOR STIRRUPS AND TIES IN SIZE T10 THROUGH T16, SHALL NOT BE LESS THAN THE VALUES IN TABLE (1)
2.INSIDE DIAMETER OF BEND FOR STIRRUPS AND TIES SHALL NOT BE LESS THAN (4 db)
FOR T 16 BAR AND SMALLER.
FOR BENDS LARGER THAN T16, DIAMETER OF BEND SHALL BE IN ACCORDANCE WITH TABLE (1).

TABLE(1)-MINIMUM DIAMETER OF BEND

BAR SIZE	MINIMUM DIAMETER OF BEND
T16 THROUGH T25	6 bd
T28 THROUGH T32	8 bd



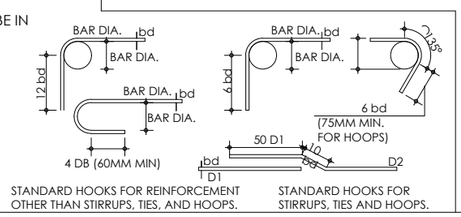



FIGURE - 4 BLOCK WALL TYPICAL RESTRAINT DETAILS

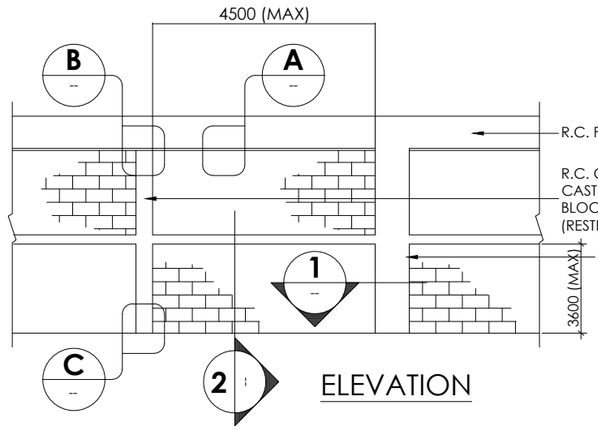


ELEVATION

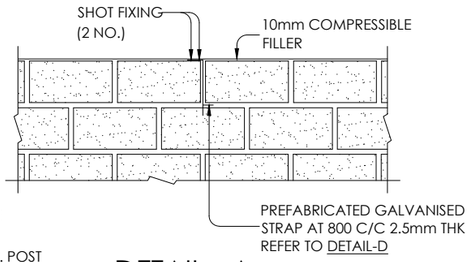


DETAIL - A

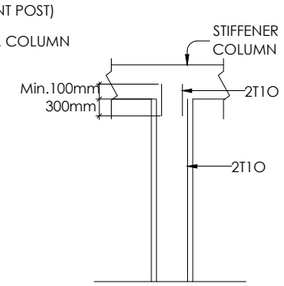


DETAIL - B

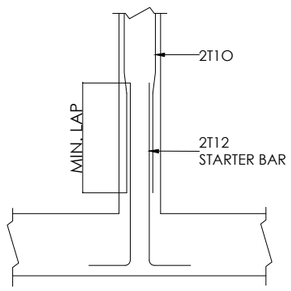

DETAIL - C

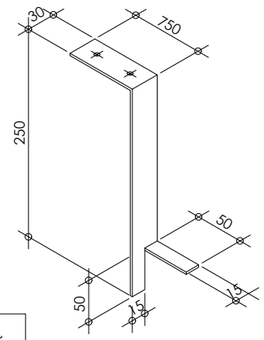

DETAIL - D

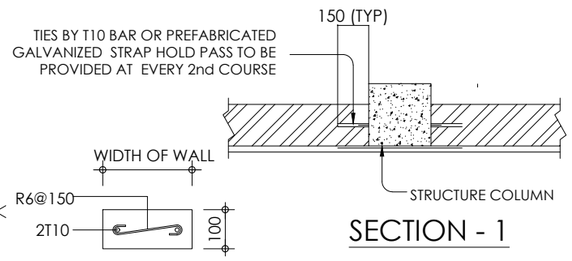

SECTION - 1

SECTION - 2

CONSTRUCTION ISSUE


PROJECT :
PROPOSED RESIDENCE DEVELOPMENT FOR Mr.CADER AT LAKE GARDENS

DRAWING TITLE :
GENERAL NOTES

STRUCTURAL ENGINEERING CONSULTANT :
AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Haloluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541

DATE: 11 AUG 2025
SHEET NO: S-0B
SCALE: AS GIVEN
PROJECT NO: SD-716
REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

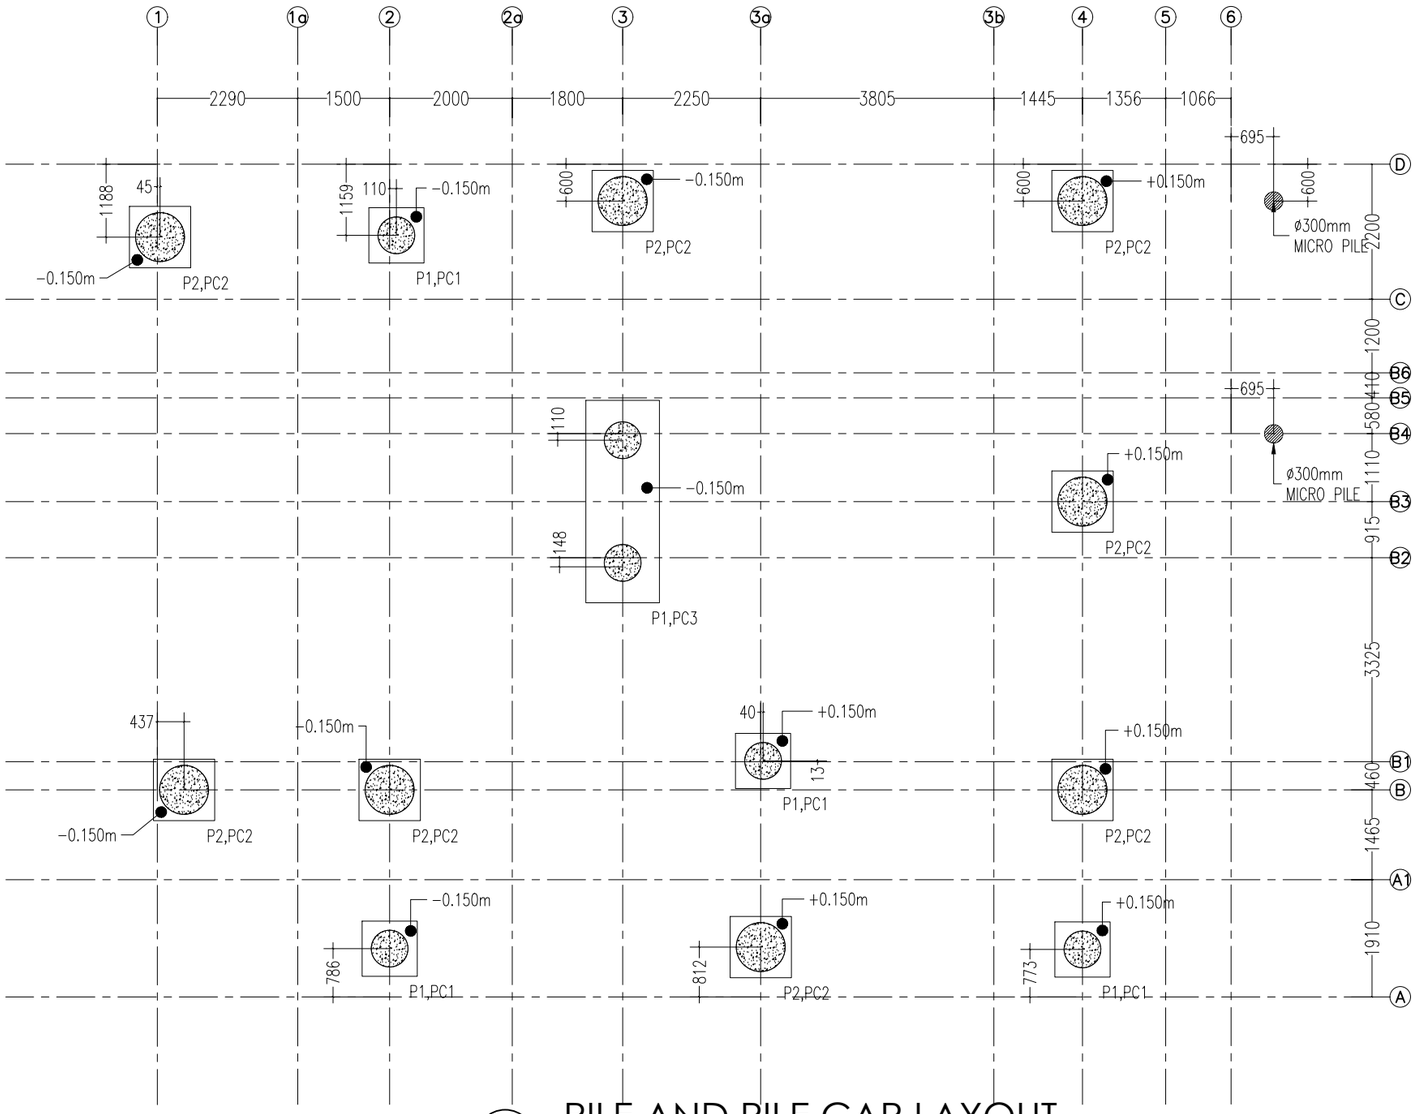

1 PILE AND PILE CAP LAYOUT


Scale: 1:100

NOTES:

1. CONTRACTOR SHOULD ALWAYS TOTAL RESPONSIBLE FOR DAMAGE ON THIRD PARTY STRUCTURES AND PRIOR TO COMMENCE THE WORKS TO BE CARRIED CRACK SURVEY AND SUBMIT METHODOLOGY ALONG WITH PILING PROCEDURES.
2. DUE TO THE PROXIMITY OF EXISTING BUILDING TO THE PROPOSED PILING AREA, THE PILING CONTRACTOR SHOULD RECOGNIZANCE THE ADJOINING PROPERTIES AND SHOULD CARRYOUT All PILING OPERATIONS FROM THE SELECTION OF BORING MACHINE TO COMPLETION OF THE PROJECT IN A MANNER WHICH Will NOT DAMAGE ADJACENT STRUCTURES.
3. THE USE OF ROTARY DRILLING MACHINE AS MANDATORY FOR THE INSTALLATION OF PILES
4. PILING CONTRACTOR SHOULD STUDY THE BORE HOLE DATA AVAILABLE FROM THE SOIL INVESTIGATION CARRIED OUT AT THE SITE.
5. ALL PILES SHOULD BE SOCKET IN TO THE UN WEATHERED BED ROCK.
6. THE GRADE OF CONCRETE SHOULD BE 30, WITH MAXIMUM FREE WATER CEMENT RATIO SHOULD BE 0.5.
7. COVER TO R/F SHOULD BE 50mm
8. PILE INTEGRITY TESTS(PIT) SHOULD BE CARRIED OUT ON ALL PILES.
9. ONE PILE DYNAMIC ANALYZER (PDA) SHOULD BE DONE ON A PILE SELECTED BY THE STRUCTURAL ENGINEER.


ø300mm MICRO PILE

SCALE 1:50

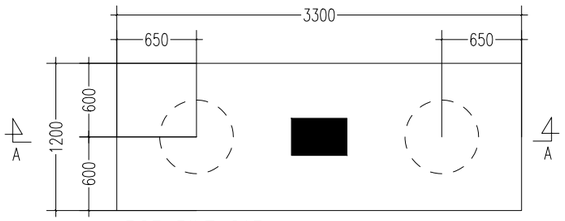


PC3 PILE CAP

SCALE 1:50

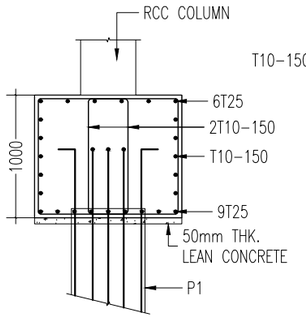


SECTION B−B

SCALE 1:50

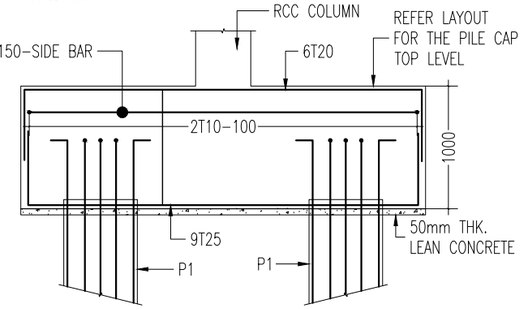

SECTION A−A

SCALE 1:50



PILE CAP TYPICAL PLAN


SCALE 1:50



SECTION X1−X1

SCALE 1:50

PILE NUMBER	SIZE	A	B
P1	600	8T20	T10@4"
P2	800	12T20	T10@4"

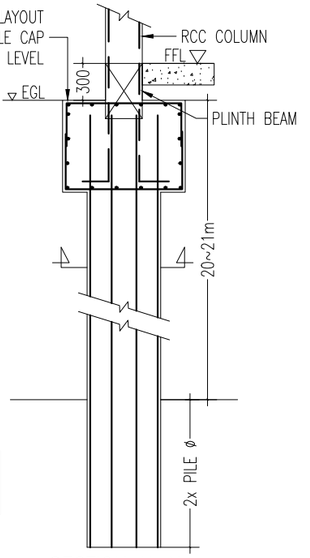

SECTION X−X

SCALE 1:50

NOTE−
MINIMUM EMBEDDED LENGTH TO BE 2x PILE ø AND SHALL BE CONFIRM AT SITE BY CONSIDERING QUALITY OF THE ROCK

TABLE−1

PILE CAP	A	B	T
PC1	900	900	1000
PC2	1000	1000	1000

SERVICE LOAD FOR PILE TESTING
ø600 − 900kN
ø800 − 1380kN

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE


PROJECT :
PROPOSED RESIDENCE DEVELOPMENT FOR Mr.CADER AT LAKE GARDENS

DRAWING TITLE :
PILE, PILE CAP LAYOUT AND DETAILS

AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Halaluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541
AJITH ASSOCIATION STRUCTURAL / CIVIL ENGINEERS


DATE:	SHEET NO:	SCALE:
11 AUG 2025	S−01	AS GIVEN
PROJECT NO: SD−716		REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

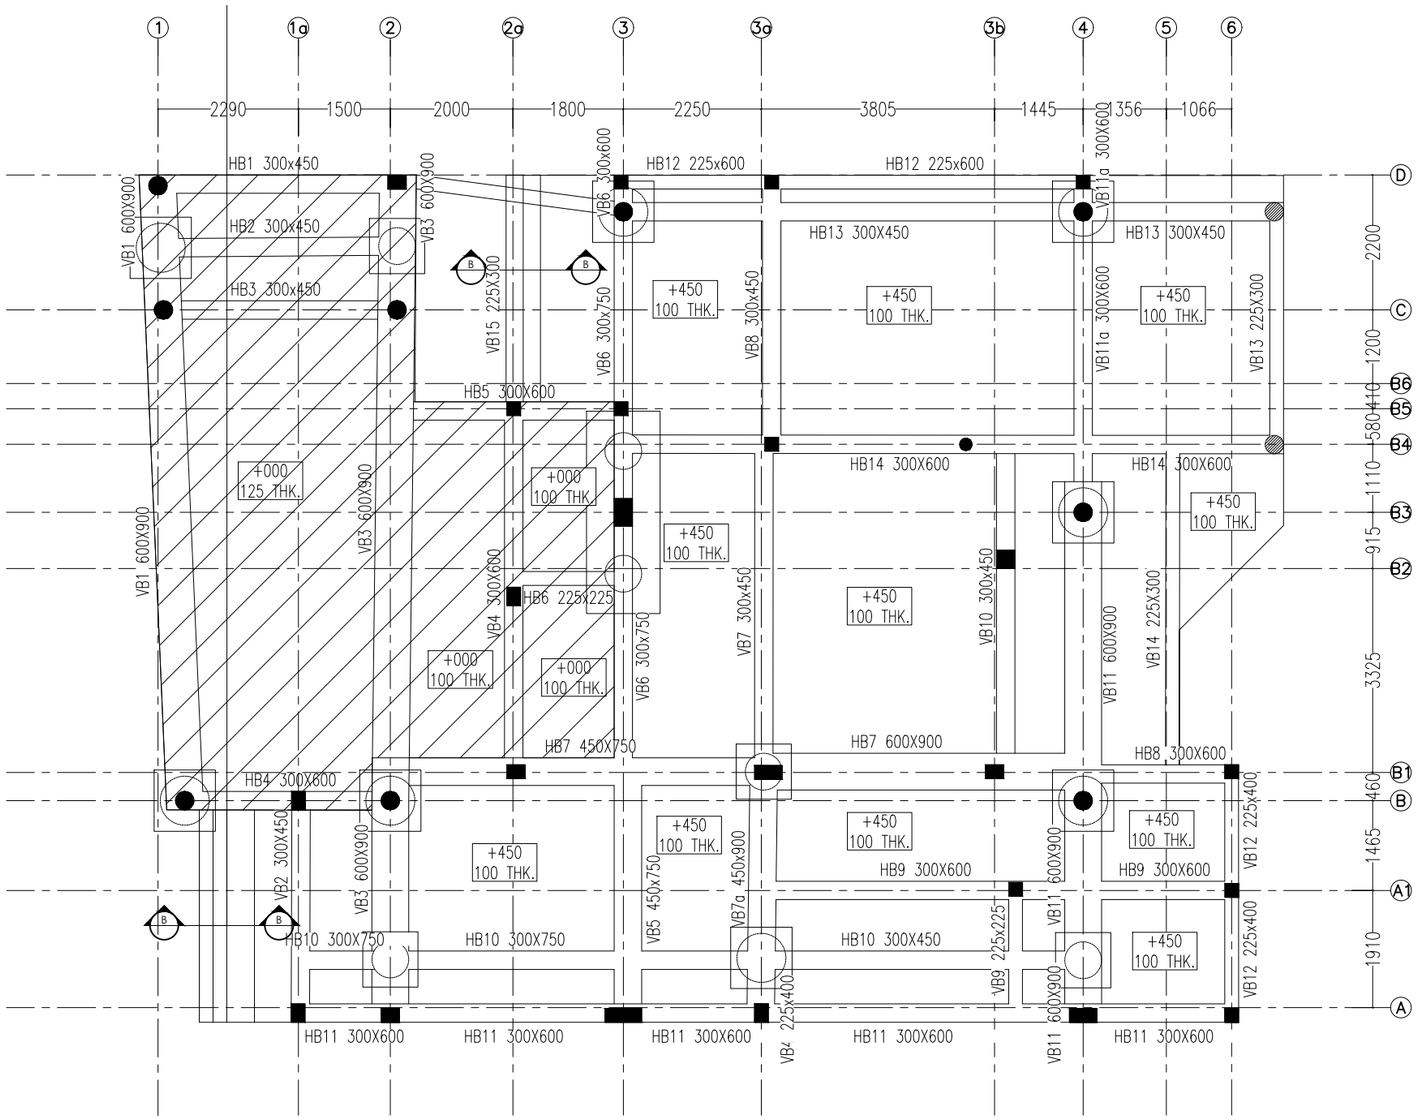


1 GROUND FLOOR GA LAYOUT

Scale: 1:100

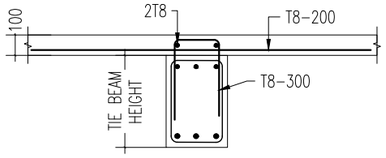


TYPICAL FLOOR SLAB DETAIL

SCALE 1:30

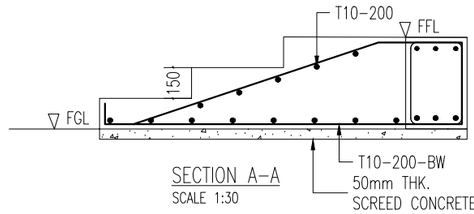

SECTION A-A

SCALE 1:30

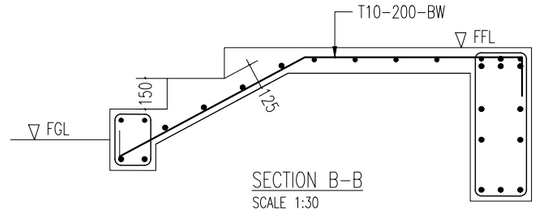

SECTION B-B

SCALE 1:30

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS

DRAWING TITLE :


GROUND FLOOR GA LAYOUT

AJITH WIJEBANDARA
BSc. Eng. (Hons). C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Halolowa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541

AJITH ASSOCIATION
STRUCTURAL / CIVIL ENGINEERS


DATE:	SHEET NO:	SCALE:
11 AUG 2025	S-02	AS GIVEN
PROJECT NO: SD-716		REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.




HB1/HB2/HB3 300x450

SCALE 1:20




HB5 300x600

SCALE 1:20




HB6 225x225

SCALE 1:20




HB11 300x600

SCALE 1:20




HB12 225x600

SCALE 1:20




VB2 300x450

SCALE 1:20




VB7 300x450

SCALE 1:20




VB10 300x450

SCALE 1:20




HB11a 300x600

SCALE 1:20




VB12 225x400

SCALE 1:20




VB13 225x300

SCALE 1:20




VB14 225x450

SCALE 1:20




VB15 225x300

SCALE 1:20

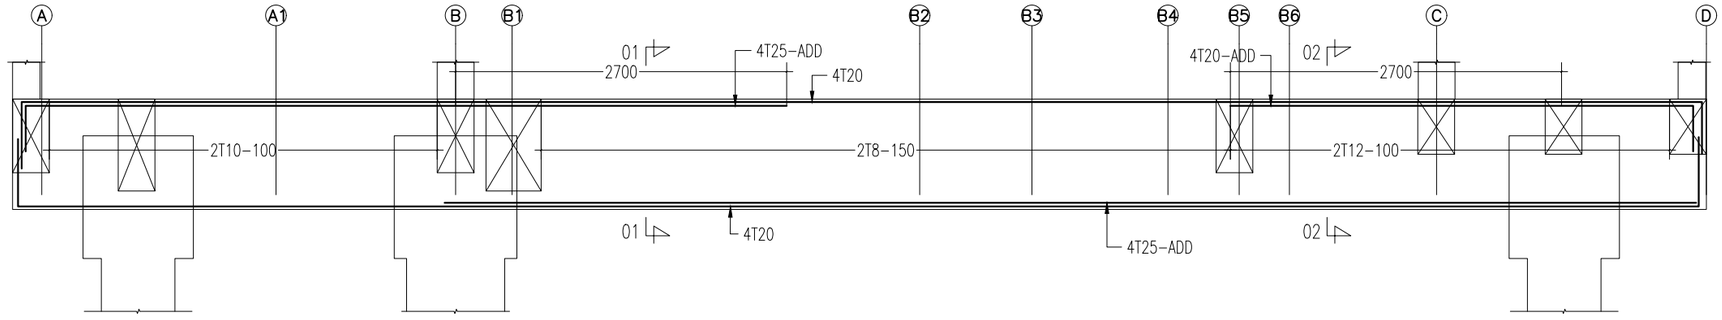


VB3 600x900

SCALE 1:50

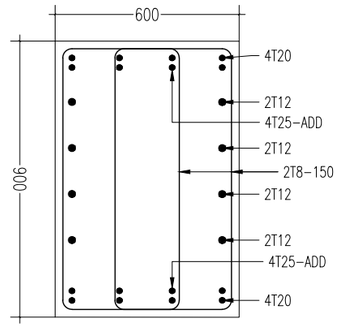


SECTION 01-01

SCALE 1:20

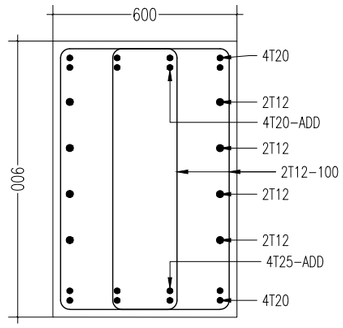


SECTION 02-02

SCALE 1:20

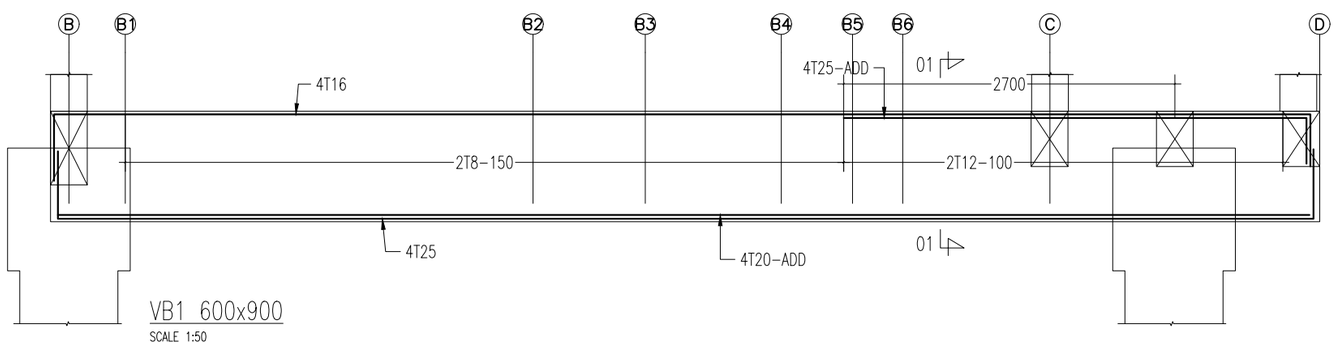


VB1 600x900

SCALE 1:50

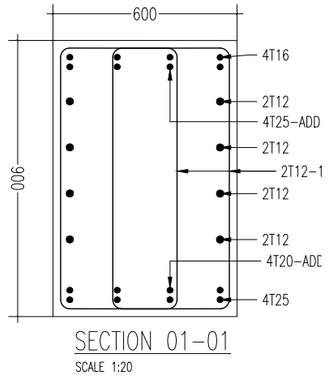


SECTION 01-01

SCALE 1:20

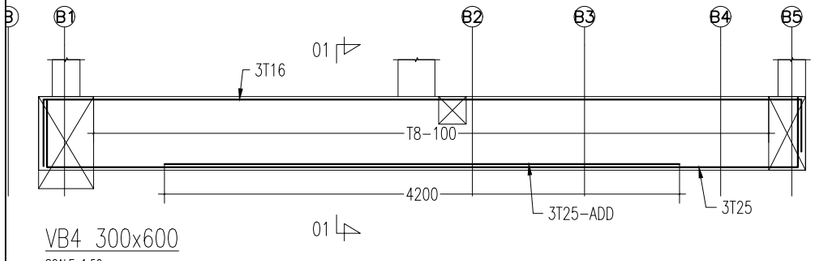


VB4 300x600

SCALE 1:50

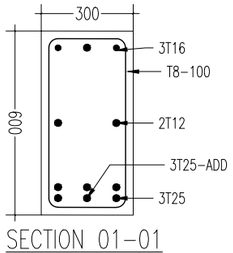

SECTION 01-01

SCALE 1:20

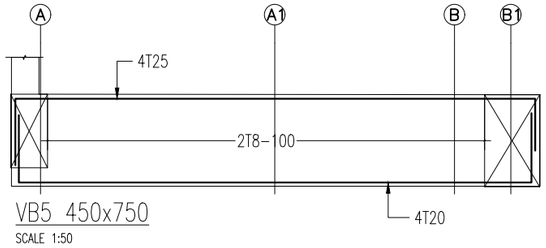

VB5 450x750

SCALE 1:50

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS


DRAWING TITLE :

GROUND SLAB BEAM DETAIL-1

AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Haloluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541


DATE:	SHEET NO:	SCALE:
11 AUG 2025	S-02a	AS GIVEN
PROJECT NO: SD-716		REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

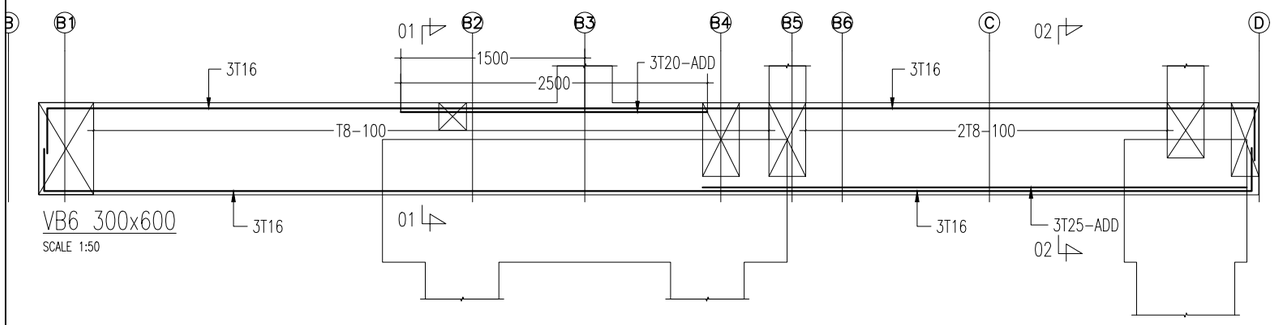

VB6 300x600

SCALE 1:50

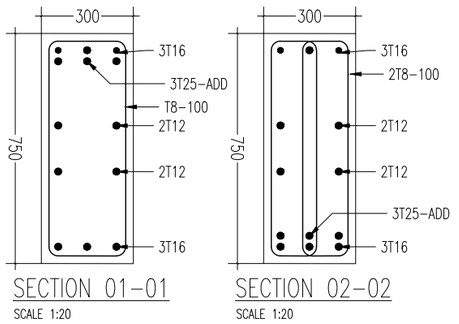


SECTION 01-01

SCALE 1:20


SECTION 02-02

SCALE 1:20

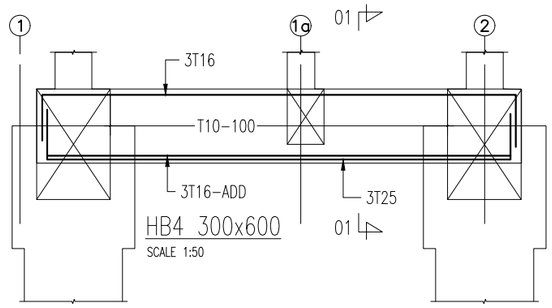


HB4 300x600

SCALE 1:50

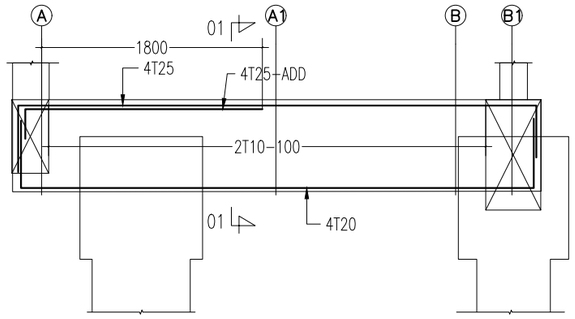


VB7a 450x900

SCALE 1:50

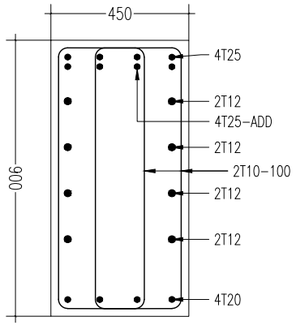


SECTION 01-01

SCALE 1:20

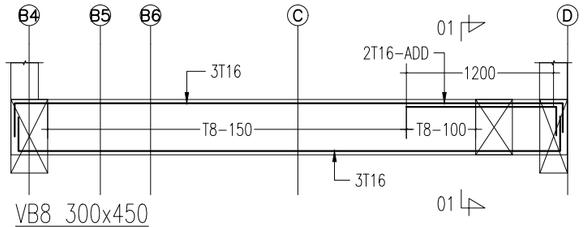


VB8 300x450

SCALE 1:50




SECTION 01-01

SCALE 1:20




SECTION 01-01

SCALE 1:20

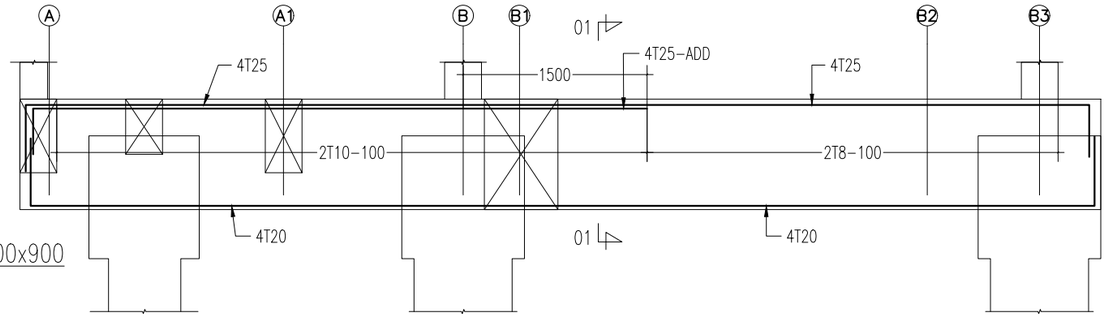


VB11 600x900

SCALE 1:50

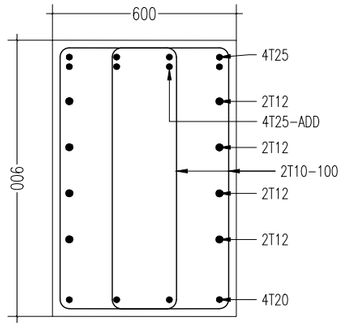


SECTION 01-01

SCALE 1:20

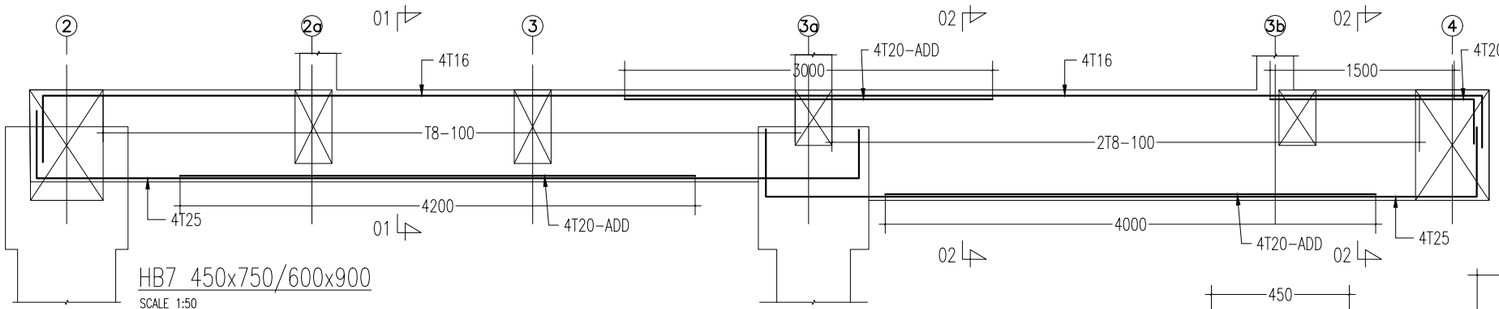


HB7 450x750/600x900

SCALE 1:50

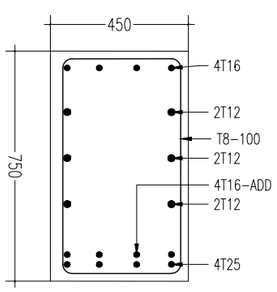

SECTION 01-01

SCALE 1:20

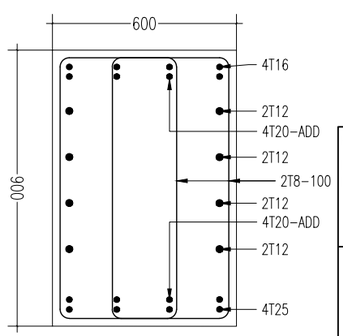

SECTION 02-02

SCALE 1:20

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS


DRAWING TITLE :

GROUND SLAB BEAM DETAIL-2

AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Halaluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541


DATE:	SHEET NO:	SCALE:
11 AUG 2025	S-02b	AS GIVEN
PROJECT NO: SD-716		REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

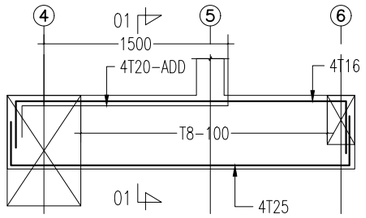


HB8 300x600

SCALE 1:50




SECTION 01-01

SCALE 1:20

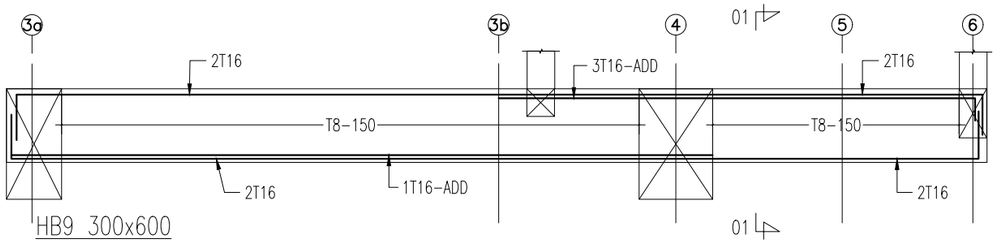


HB9 300x600

SCALE 1:50




SECTION 01-01

SCALE 1:20

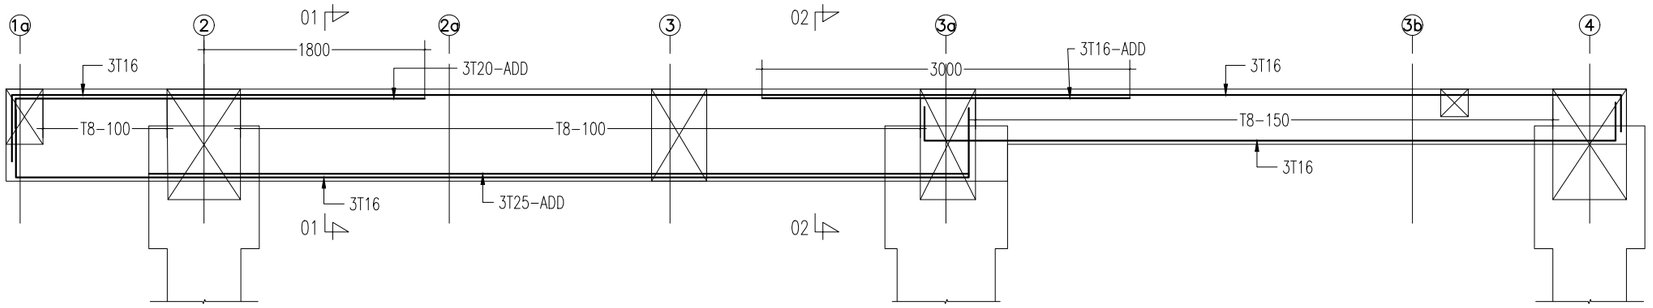

HB10 300x750/450

SCALE 1:50

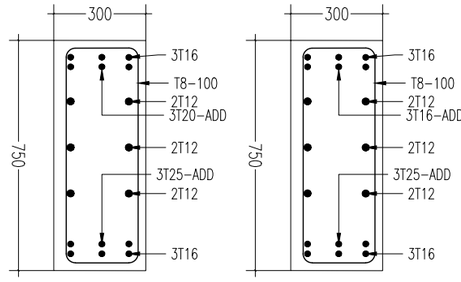


SECTION 01-01

SCALE 1:20


SECTION 02-02

SCALE 1:20

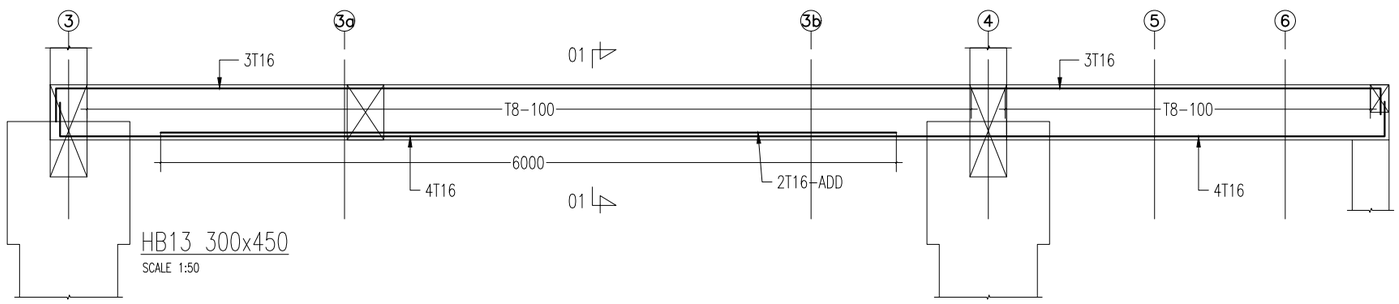


HB13 300x450

SCALE 1:50




SECTION 01-01

SCALE 1:20

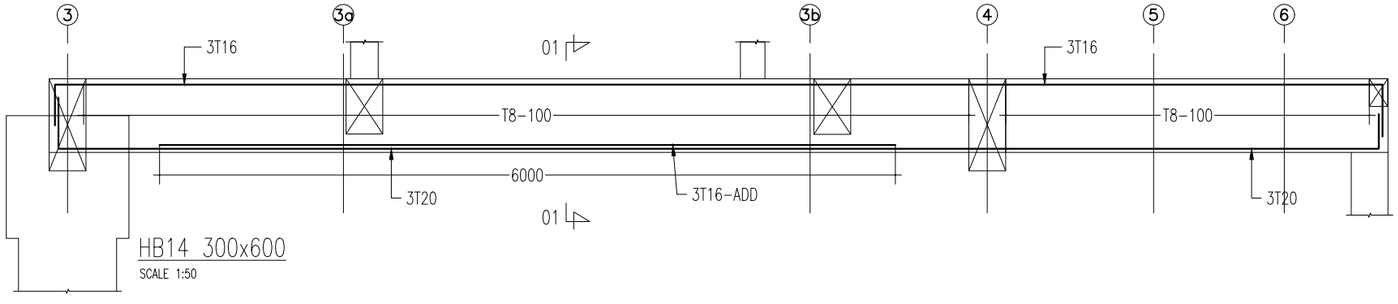

HB14 300x600

SCALE 1:50



SECTION 01-01

SCALE 1:20

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS

DRAWING TITLE :


GROUND SLAB BEAM DETAIL-3

AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Haloluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541

AJITH ASSOCIATION
STRUCTURAL / CIVIL ENGINEERS

DATE:	SHEET NO:	SCALE:
11 AUG 2025	S-02c	AS GIVEN
PROJECT NO: SD-716		REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

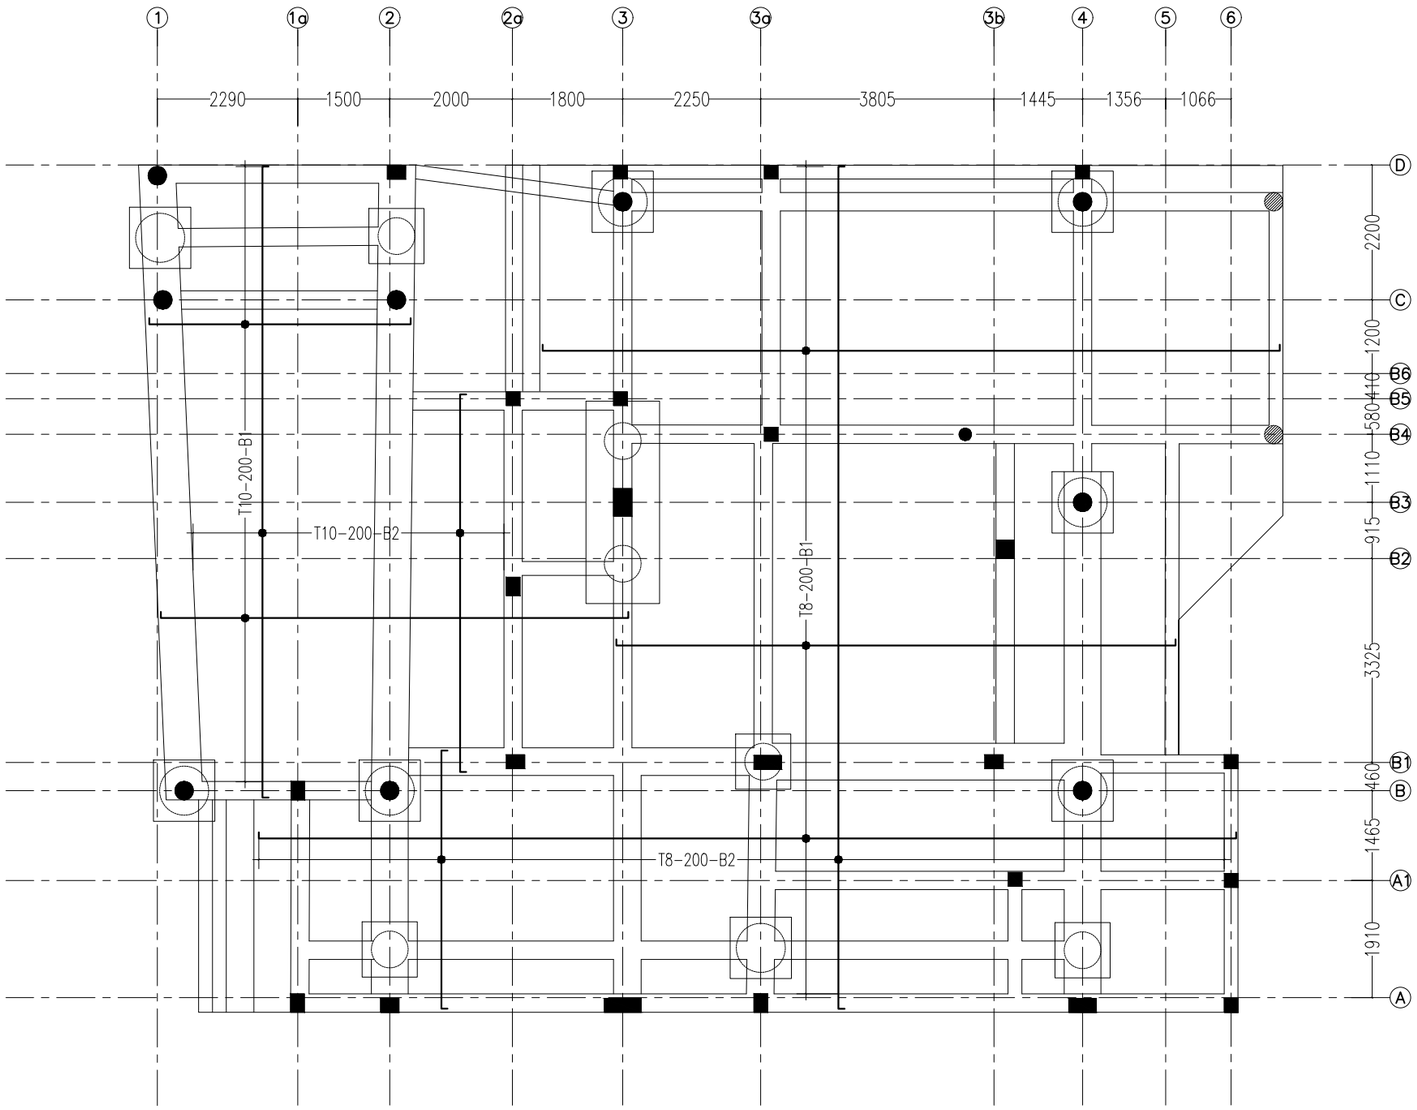

1 GROUND SLAB R/F DETAIL

Scale: 1:100

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS


DRAWING TITLE :

GROUND SLAB R/F DETAIL

AJITH WIJEBANDARA
BSc. Eng. (Hons). C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Halaluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541

DATE:	SHEET NO:	SCALE:
11 AUG 2025	S-02d	AS GIVEN
PROJECT NO: SD-716		REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction, all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

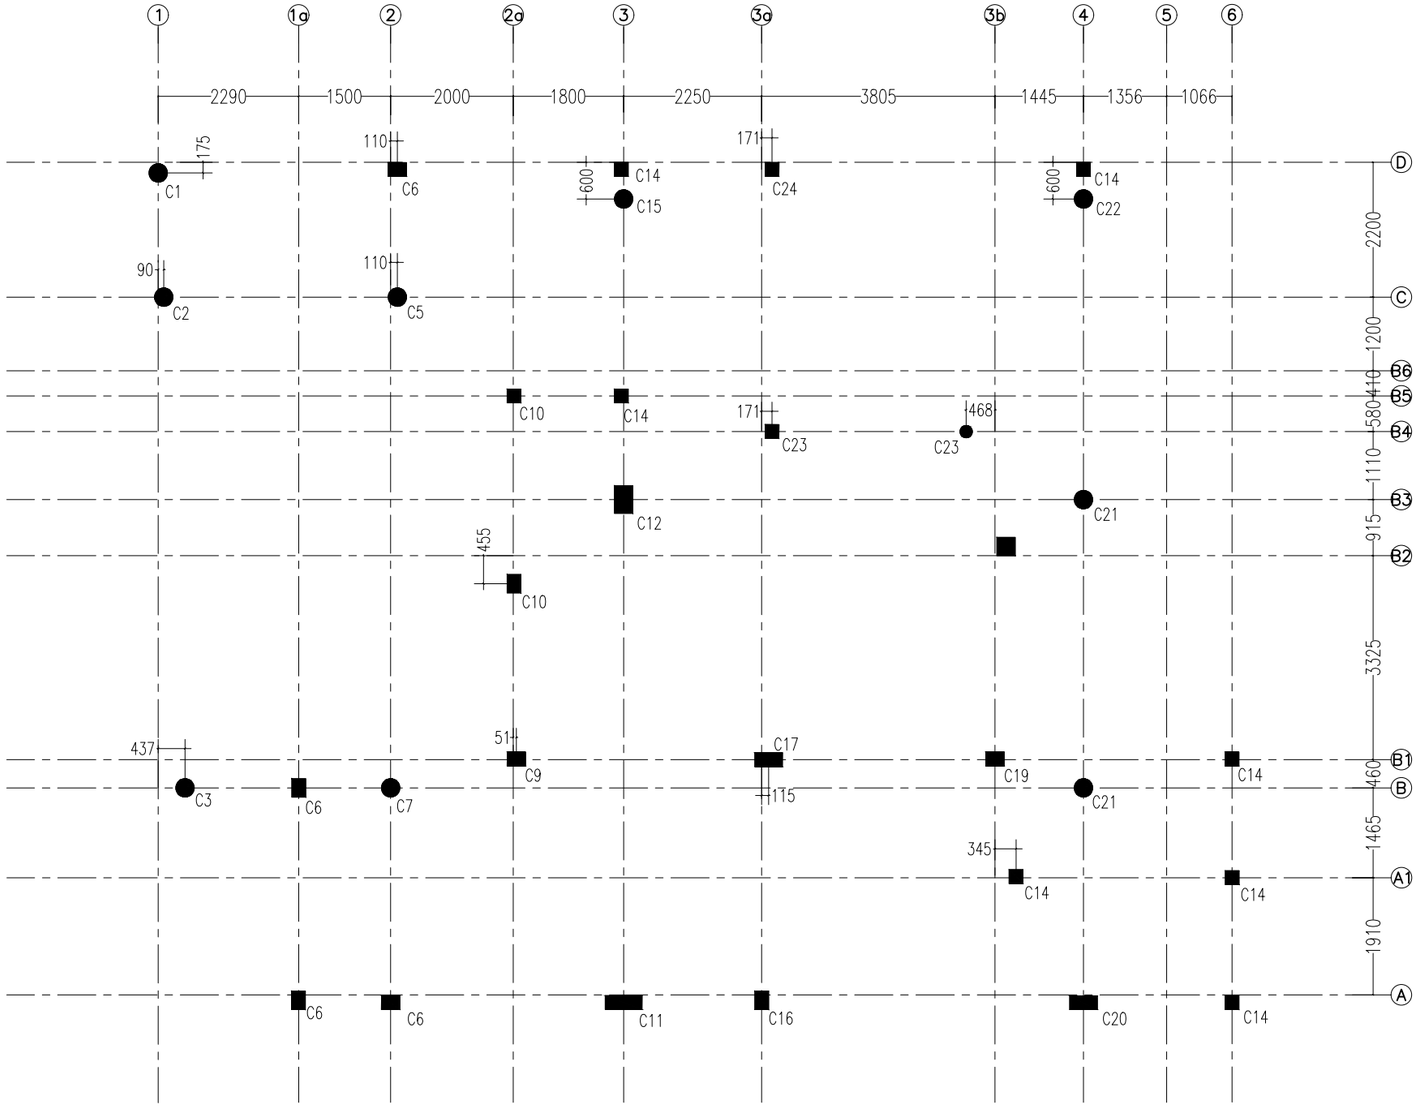

1 GROUND COLUMN LAYOUT

Scale: 1:100

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS


DRAWING TITLE :

GROUND COLUMN LAYOUT

AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Halaluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541
AJITH ASSOCIATION STRUCTURAL | CIVIL ENGINEERS

DATE: 11 AUG 2025
SHEET NO: S–03
SCALE: AS GIVEN
PROJECT NO: SD–716
REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

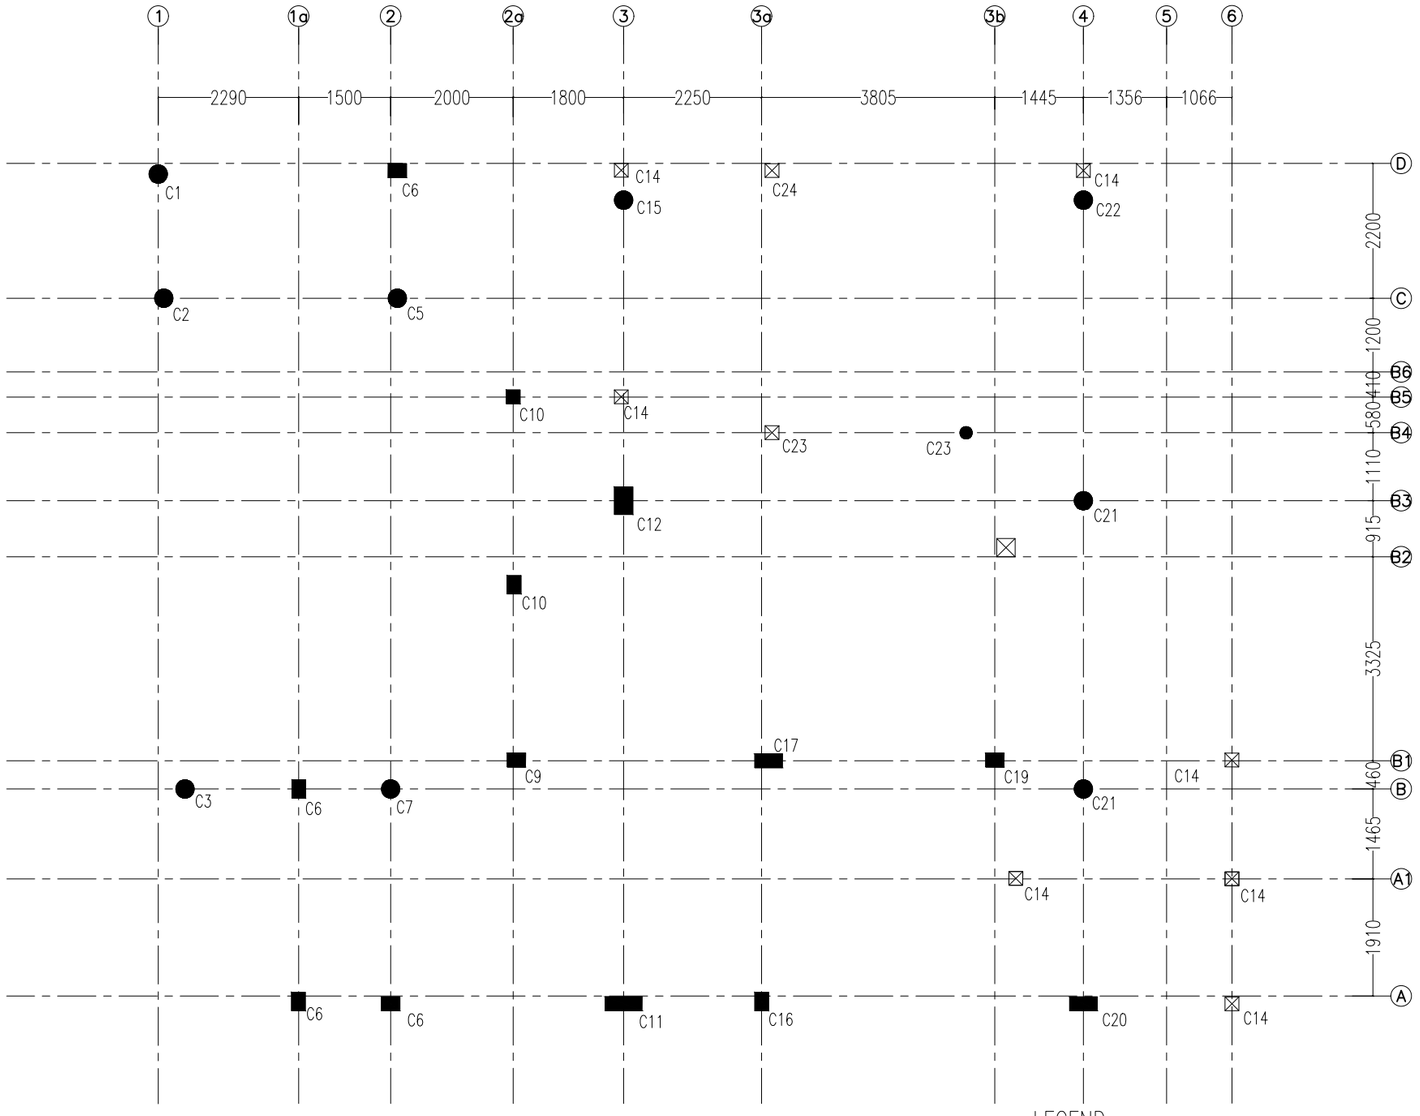

1 ATTIC FLOOR COLUMN LAYOUT

Scale: 1:100

LEGEND–

- CONTINUOUS COLUMN
- FLOATER COLUMN
- TERMINATE COLUMN

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS


DRAWING TITLE :

ATTIC FLOOR COLUMN LAYOUT

AJITH WIJEBANDARA
BSc. Eng. (Hons). C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Halaluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541

DATE:	SHEET NO:	SCALE:
11 AUG 2025	S–03a	AS GIVEN
PROJECT NO: SD–716		REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

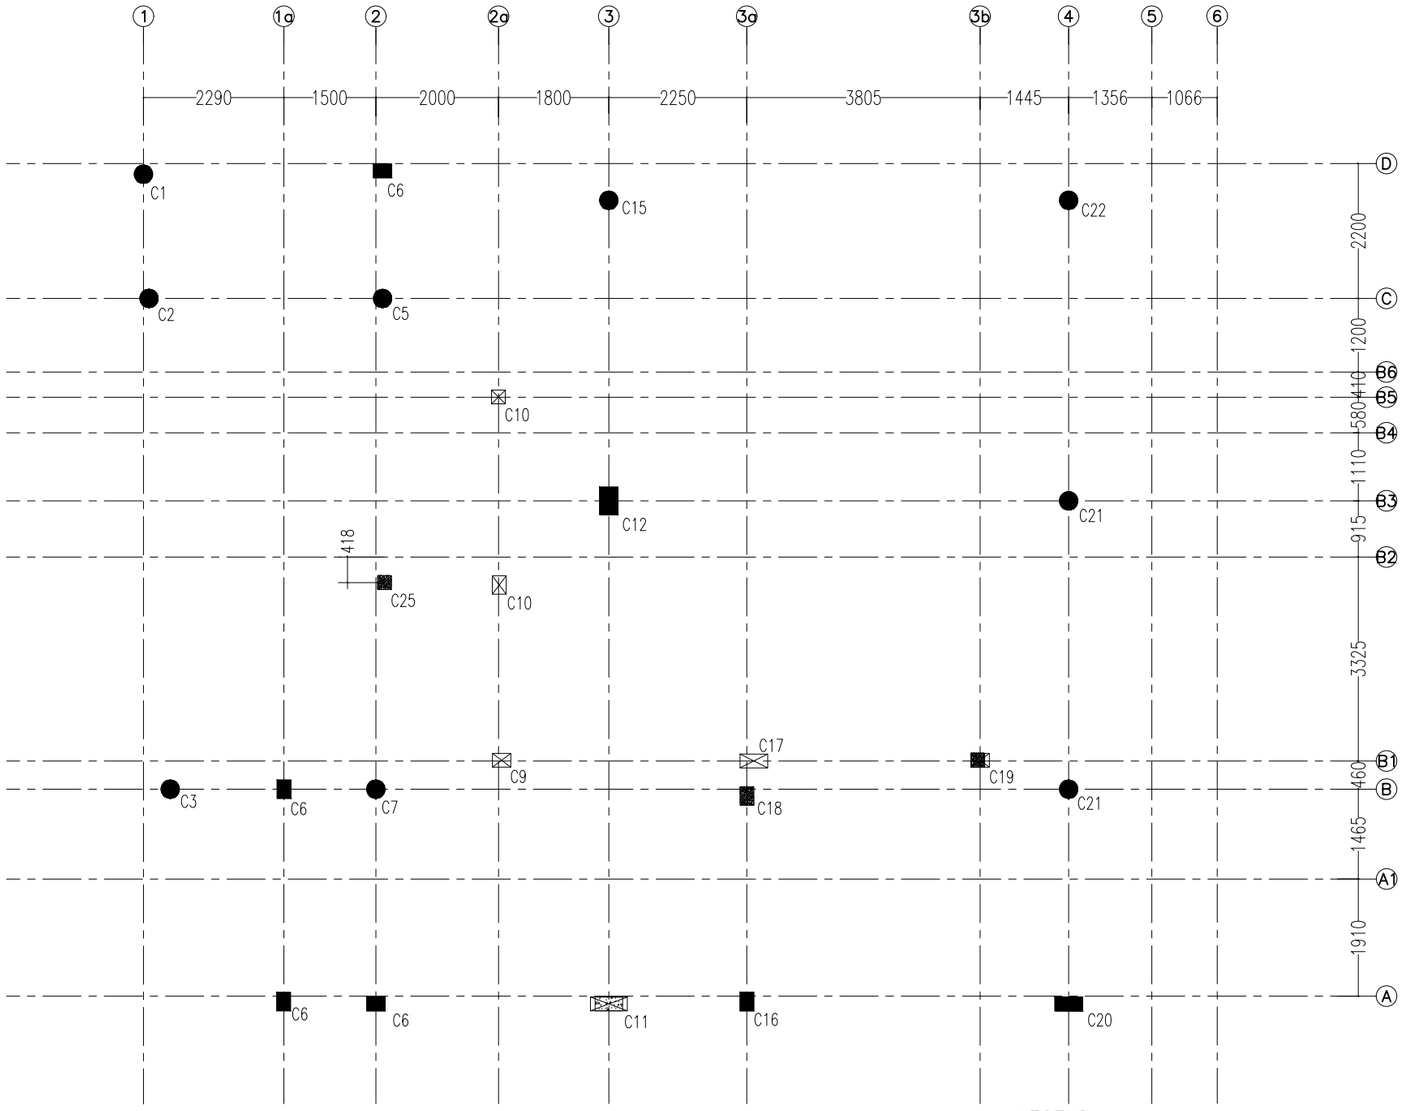

1 FIRST FLOOR COLUMN LAYOUT

Scale: 1:100

LEGEND–

CONTINUOUS COLUMN

FLOATER COLUMN

TERMINATE COLUMN

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS


DRAWING TITLE :

FIRST FLOOR COLUMN LAYOUT

AJITH WIJEBANDARA
BSc. Eng. (Hons). C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Halaluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541

DATE:	SHEET NO:	SCALE:
11 AUG 2025	S–03b	AS GIVEN
PROJECT NO: SD–716		REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction, all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

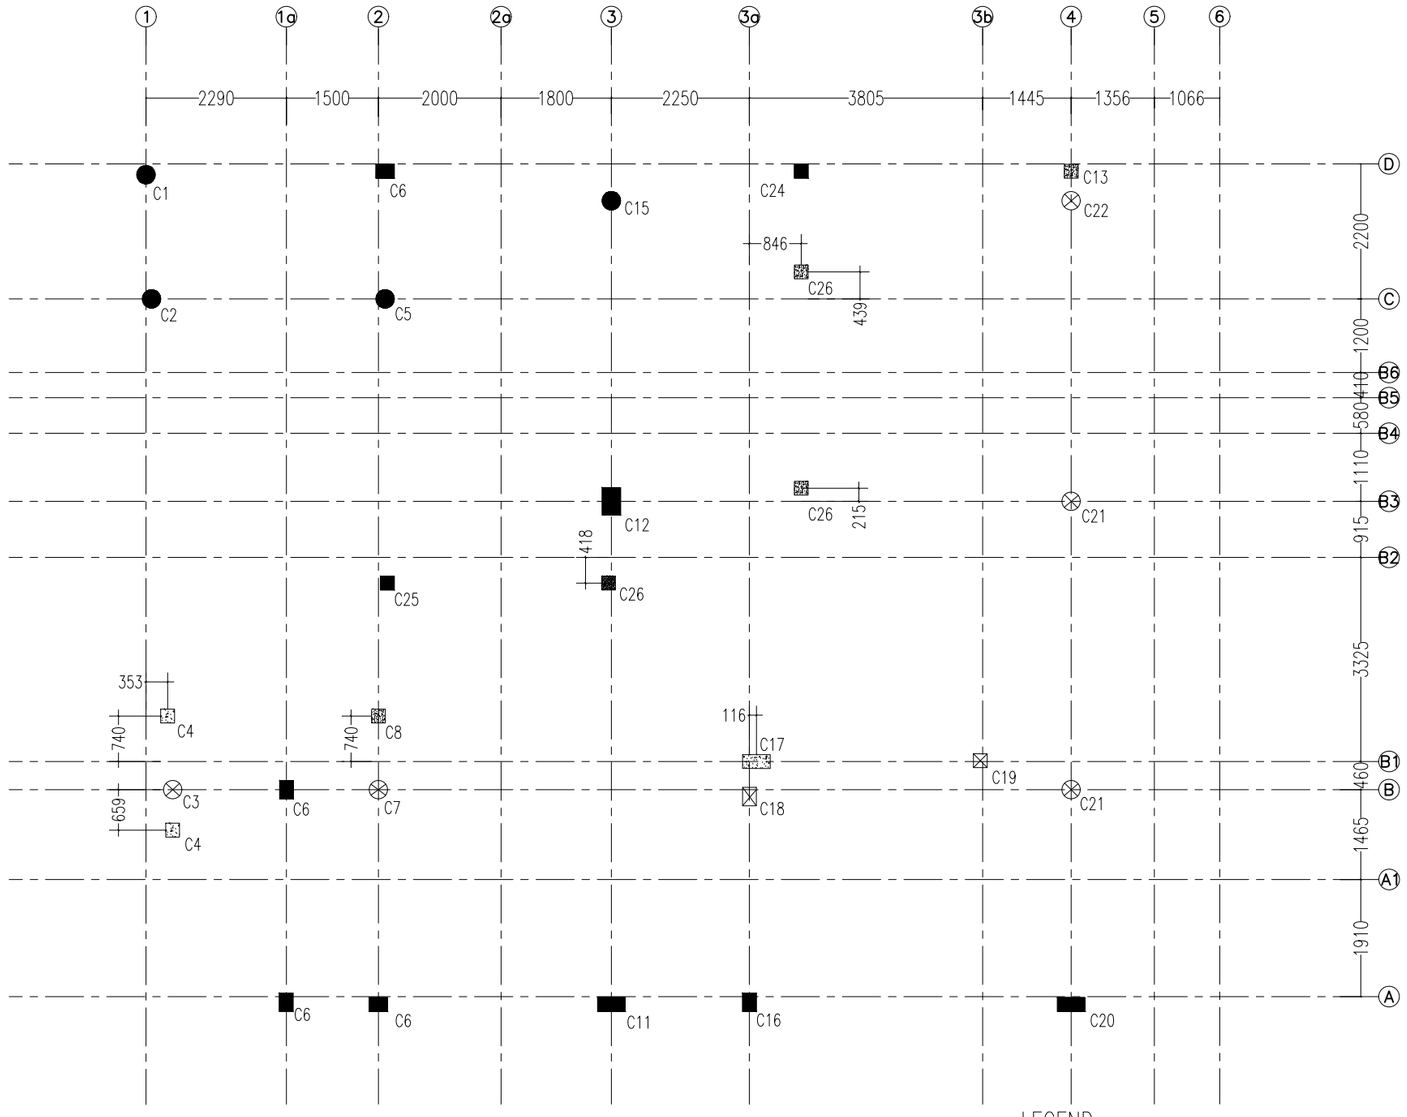

1 SECOND FLOOR COLUMN LAYOUT

Scale: 1:100

LEGEND–

CONTINUOUS COLUMN

FLOATER COLUMN

TERMINATE COLUMN

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS


DRAWING TITLE :

SECOND FLOOR COLUMN LAYOUT

AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Halaluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541

DATE:	SHEET NO:	SCALE:
11 AUG 2025	S–03c	AS GIVEN
PROJECT NO: SD–716		REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction, all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

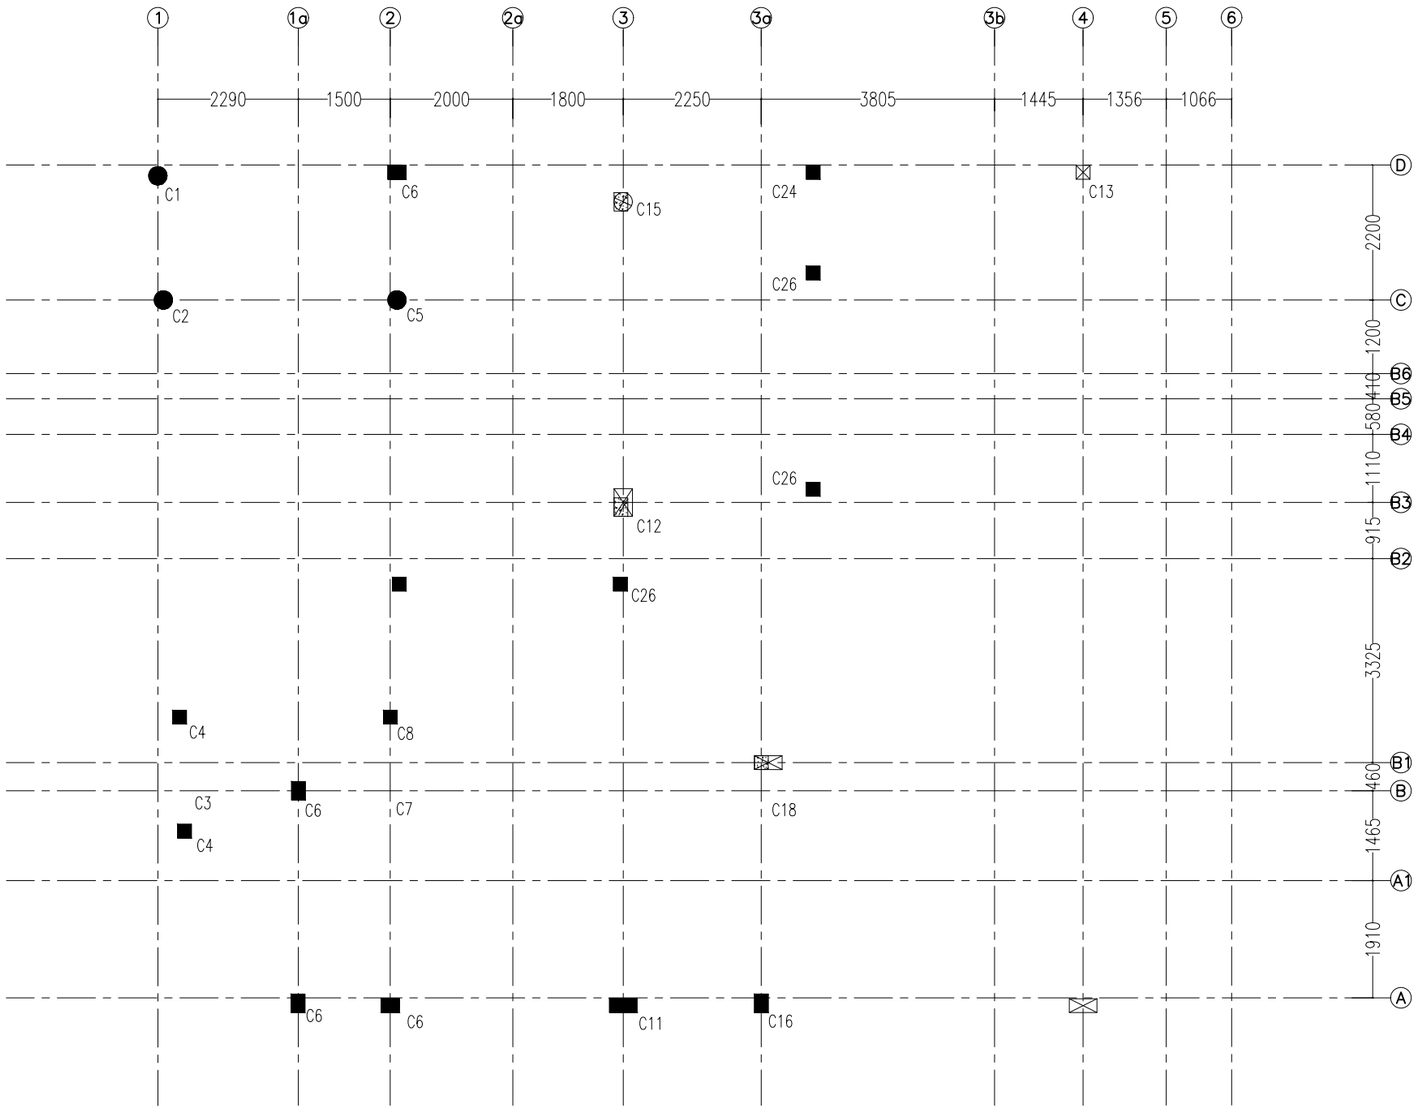

1 POOL DECK LEVEL COLUMN LAYOUT

Scale: 1:100

LEGEND–

- CONTINUOUS COLUMN
- FLOATER COLUMN
- TERMINATE COLUMN

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR Mr.CADER AT LAKE GARDENS


DRAWING TITLE :

POOL DECK LEVEL COLUMN LAYOUT

AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Halaluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541

DATE:	SHEET NO:	SCALE:
11 AUG 2025	S–03d	AS GIVEN
PROJECT NO: SD–716		REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction, all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

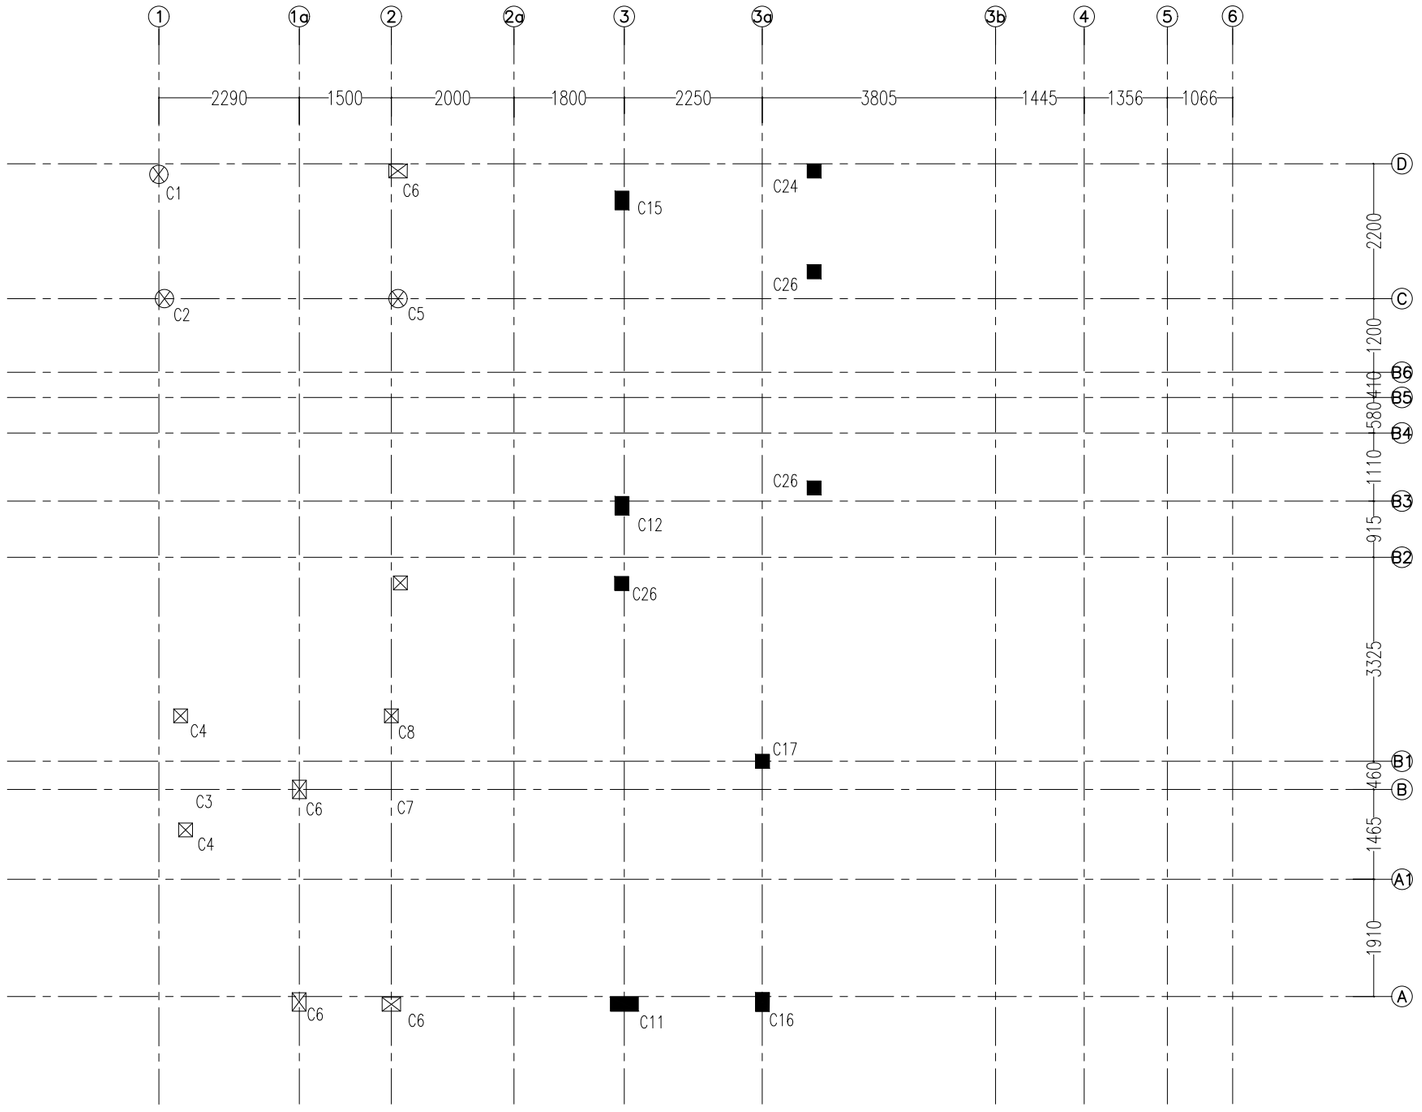

1 ROOF SLAB COLUMN LAYOUT +12350

Scale: 1:100

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS

DRAWING TITLE :

ROOF SLAB COLUMN LAYOUT +12350

AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Halaluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541
AJITH ASSOCIATION STRUCTURAL / CIVIL ENGINEERS

DATE: **11 AUG 2025**


SHEET NO: S–03e

SCALE: AS GIVEN

PROJECT NO: **SD–716**

REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

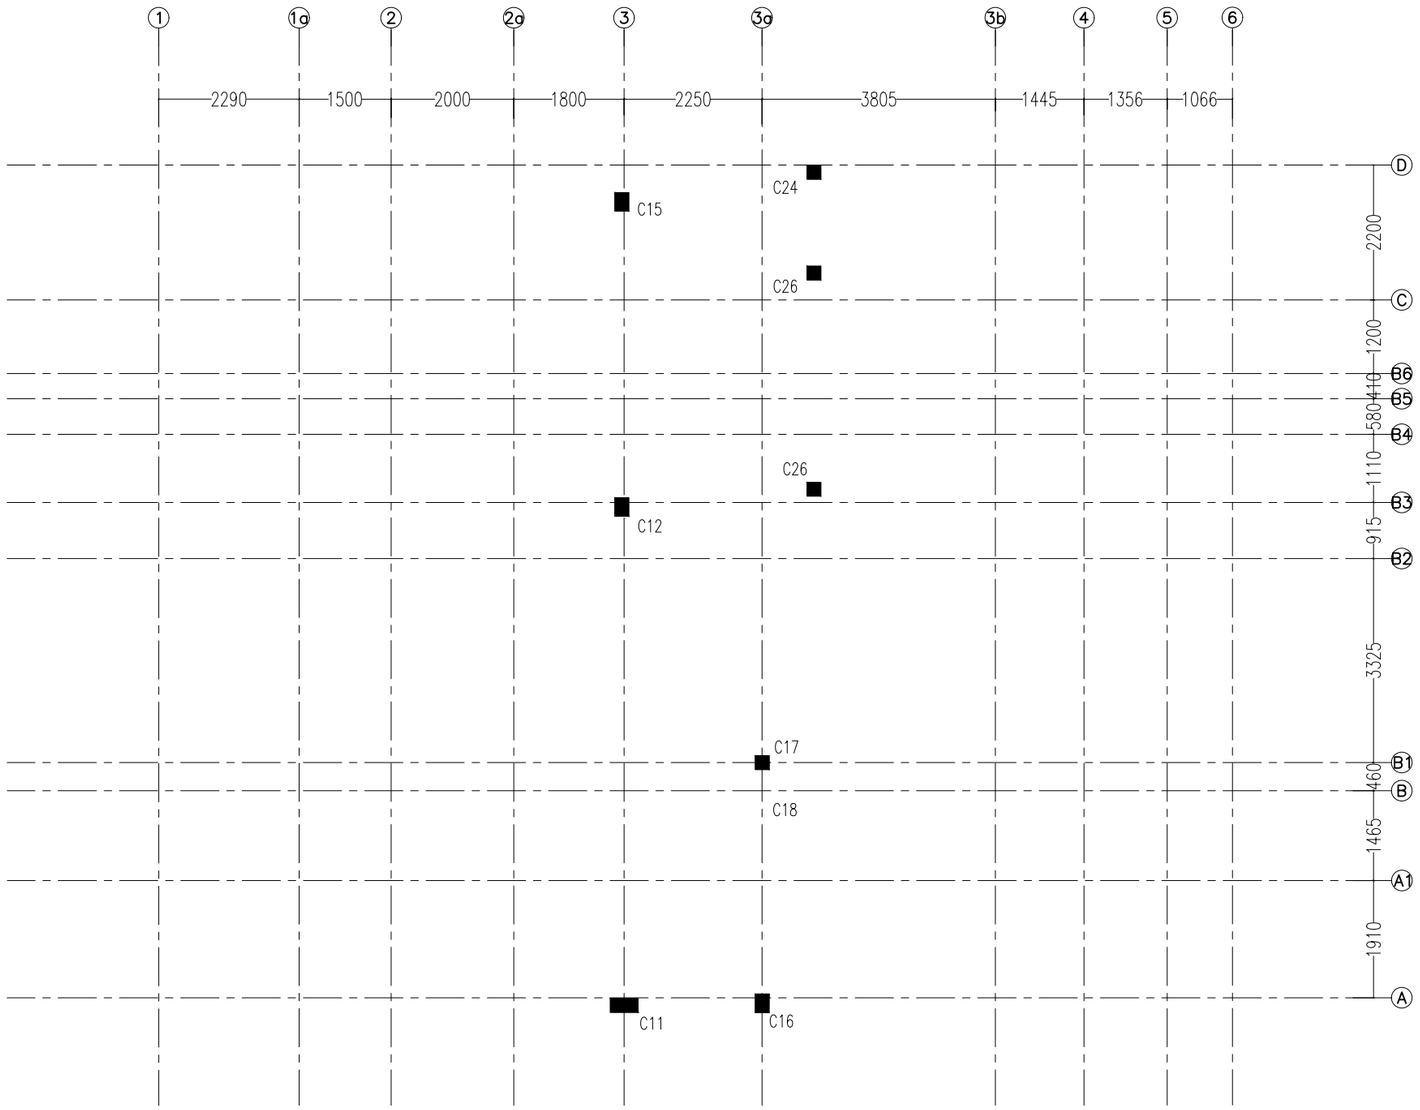

1 ROOF SLAB COLUMN LAYOUT +13650

Scale: 1:100

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS

DRAWING TITLE :



































ROOF SLAB COLUMN LAYOUT +13650

AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Haloluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541

AJITH ASSOCIATION STRUCTURAL / CIVIL ENGINEERS

DATE:	SHEET NO:	SCALE:
11 AUG 2025	S–03f	AS GIVEN
PROJECT NO: **SD–716**		**REVISION NO: R0**

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10
ROOF SLAB-2										
ROOF SLAB-1 POOL										
DECK SECOND										
FIRST FLOOR											
FIRST FLOOR ATTIC										
GROUND FLOOR										

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :
PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS





































DRAWING TITLE :
COLUMN DETAIL–1

AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Halaluwa, Kandy, Sri Lanka
email : ajith.cengl@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541

AJITH ASSOCIATION
STRUCTURAL | CIVIL ENGINEERS

DATE:	SHEET NO:	SCALE:
11 AUG 2025	S–03g	AS GIVEN
PROJECT NO: SD–716		REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

	C11	C12	C13	C14	C15	C16	C17	C18	C19
ROOF SLAB-2 ROOF									
ROOF SLAB-1 POOL									
DECK SECOND									
FIRST FLOOR									
FIRST FLOOR ATTIC									
GROUND FLOOR									

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS

DRAWING TITLE :















COLUMN DETAIL–2

AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Halaluwa, Kandy, Sri Lanka
email : ajith.cengl@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541

AJITH ASSOCIATION
STRUCTURAL | CIVIL ENGINEERS

DATE:	SHEET NO:	SCALE:
11 AUG 2025	S–03h	AS GIVEN
PROJECT NO: SD–716		REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

ROOF SLAB-2 / ROOF						225
SLAB-1 / POOL						225
DECK / SECOND FLOOR						225
FIRST FLOOR						225
ATTIC FLOOR						
GROUND FLOOR						
	C20	C21	C22	C23	C24	

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS

DRAWING TITLE :


COLUMN DETAIL–3

AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Halaluwa, Kandy, Sri Lanka
email : ajith.cengl@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541

AJITH ASSOCIATION
STRUCTURAL | CIVIL ENGINEERS


DATE:	SHEET NO:	SCALE:
11 AUG 2025	S–03i	AS GIVEN
PROJECT NO: SD–716		REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

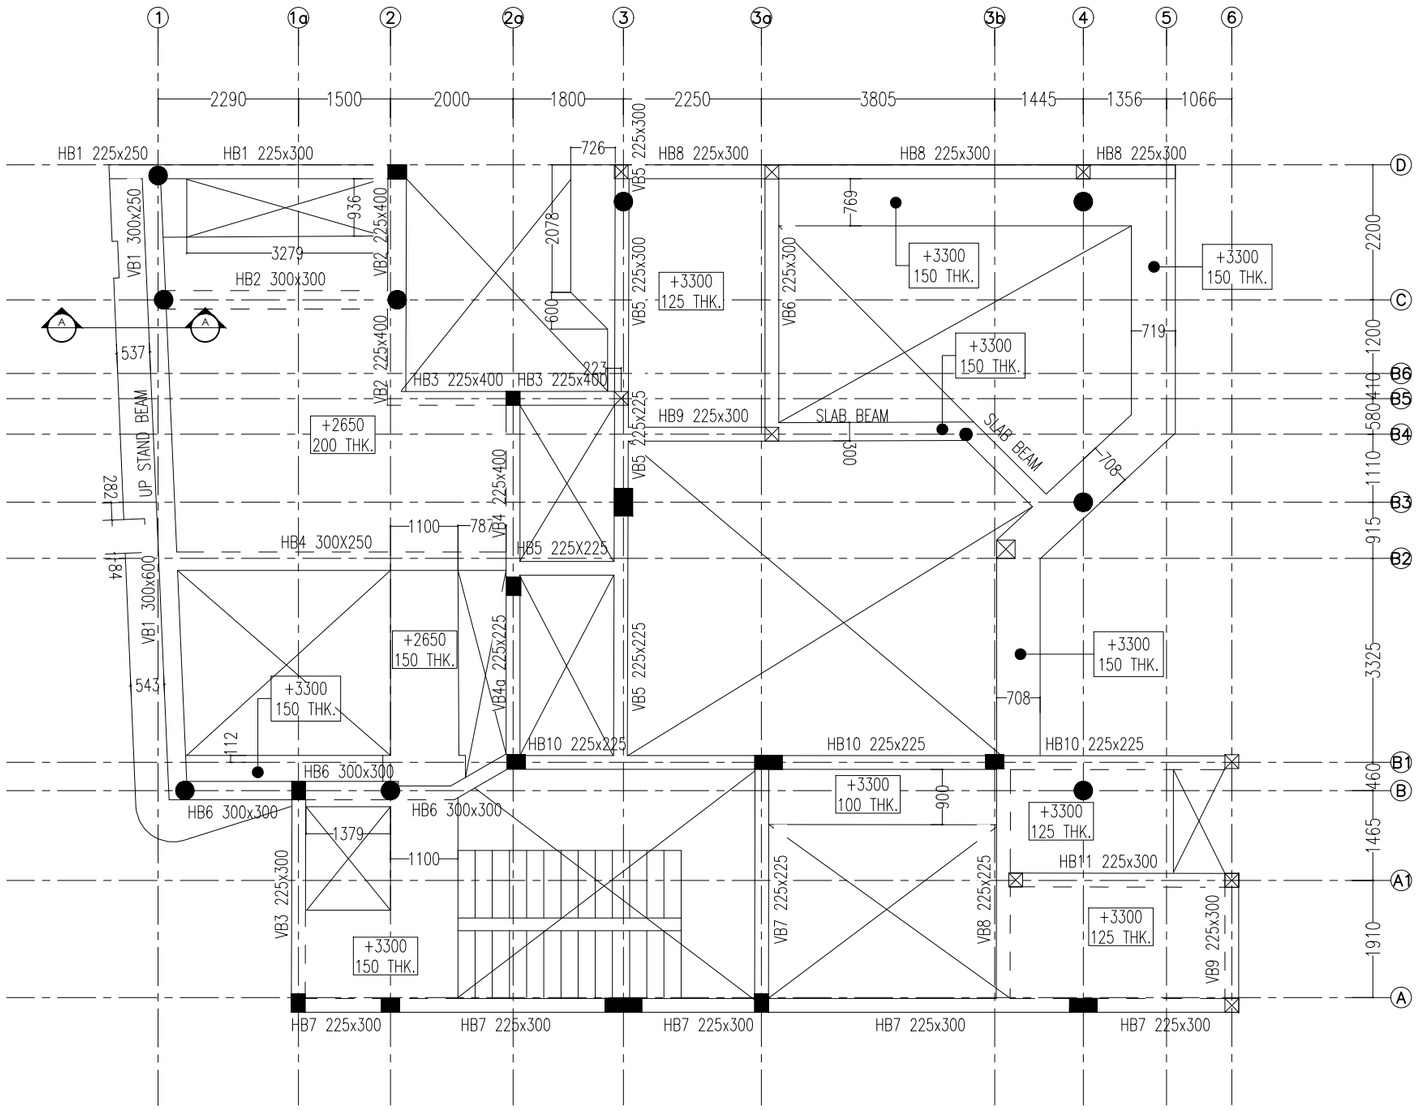

1 ATTIC FLOOR GA LAYOUT

Scale: 1:100

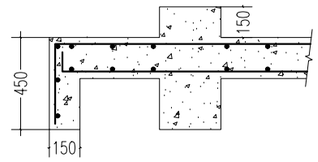

SECTION A–A

SCALE 1:30

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS

DRAWING TITLE :

ATTIC FLOOR GA LAYOUT

AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Halaluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541
AJITH ASSOCIATION STRUCTURAL / CIVIL ENGINEERS

DATE: 11 AUG 2025


SHEET NO: S–04

SCALE: AS GIVEN


PROJECT NO: SD–716

REVISION NO: R0


copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.




HB1/HB8
225x300
SCALE 1:20




HB2/HB6 300x300
SCALE 1:20




HB3 225x400
SCALE 1:20




HB9/VB3/VB9
225x300
SCALE 1:20




HB5/VB7 225x225
SCALE 1:20




HB11 225x300
SCALE 1:20




HB4 300x250
SCALE 1:20




SLAB BEAM 300x125
SCALE 1:20




VB6/VB8 225x300
SCALE 1:20

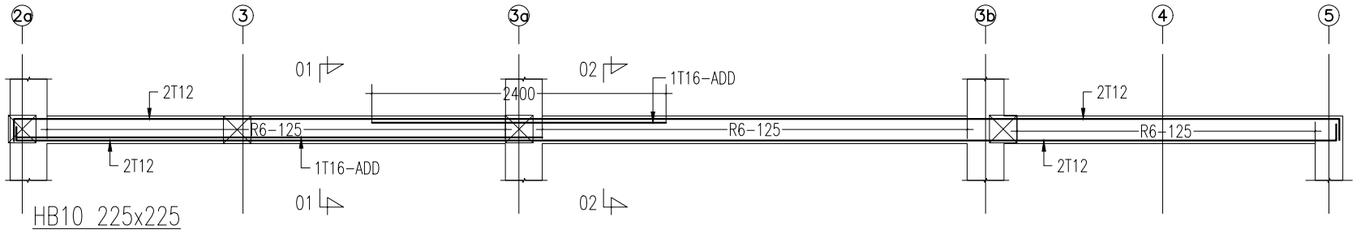


HB10 225x225
SCALE 1:50




SECTION 01-01
SCALE 1:20




SECTION 02-02
SCALE 1:20

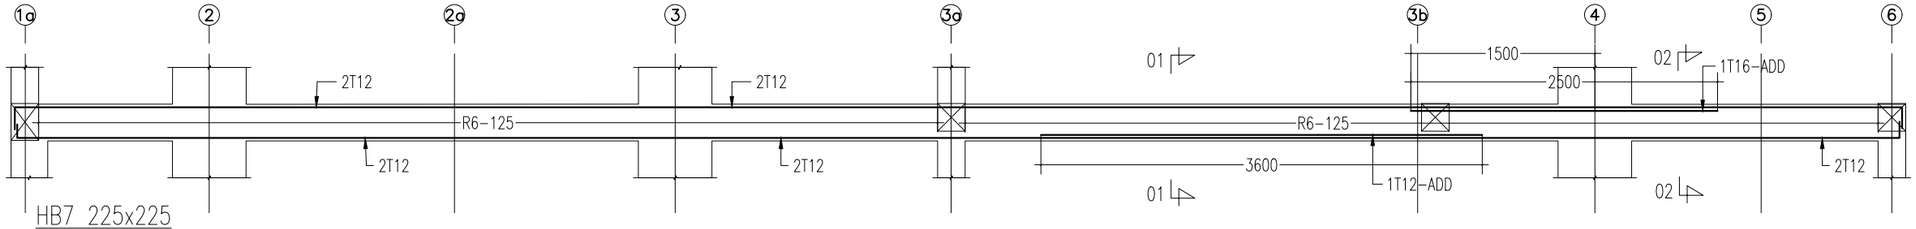


HB7 225x225
SCALE 1:50




SECTION 01-01
SCALE 1:20




SECTION 02-02
SCALE 1:20

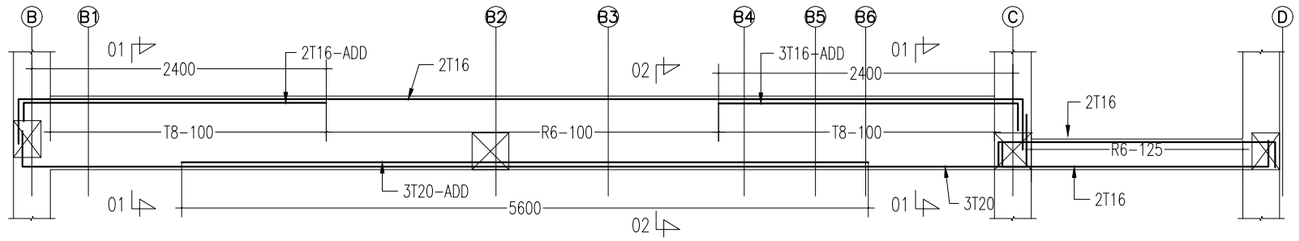


VB1 300x600/250
SCALE 1:50



SECTION 01-01
SCALE 1:20



SECTION 02-02
SCALE 1:20

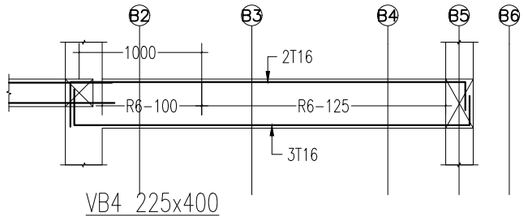

VB4 225x400
SCALE 1:50

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE


PROJECT :
PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS

DRAWING TITLE :
ATTIC FLOOR BEAM DETAUIL

AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Haloluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541


DATE:	SHEET NO:	SCALE:
11 AUG 2025	S-04a	AS GIVEN
PROJECT NO: SD-716		REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

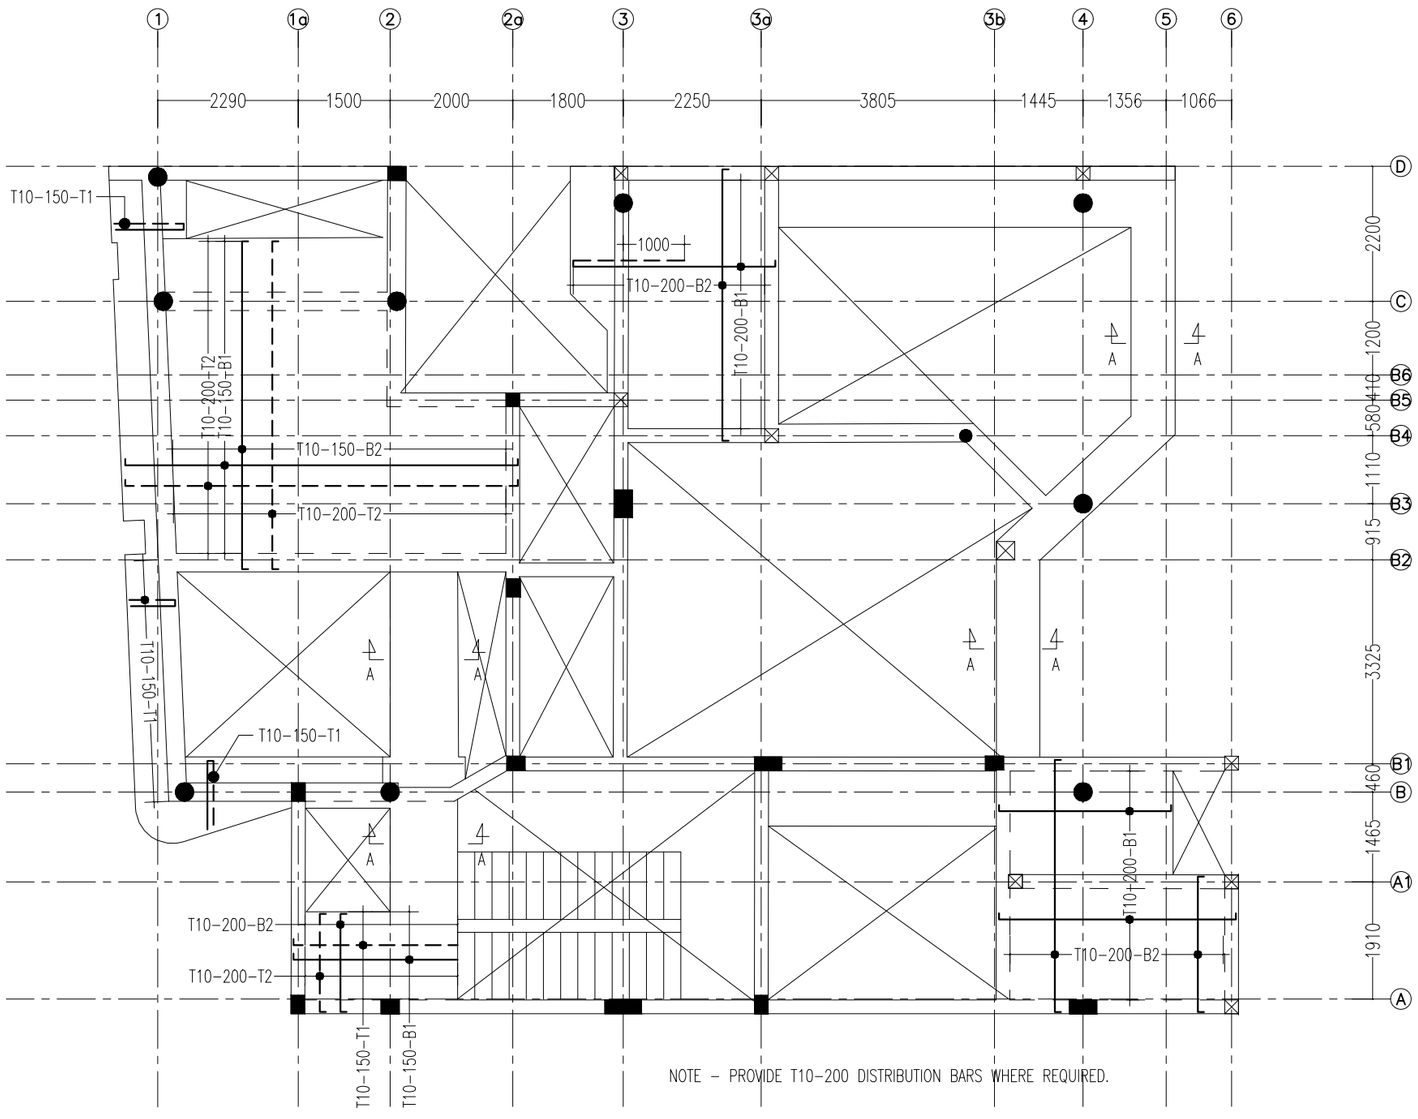

1 ATTIC FLOOR SLAB R/F DETAIL

Scale: 1:100

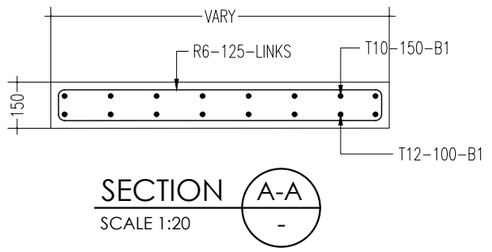

SECTION A-A

SCALE 1:20

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS


DRAWING TITLE :

ATTIC FLOOR SLAB R/F DETAIL

AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Halaluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541


DATE:	SHEET NO:	SCALE:
11 AUG 2025	S-4b	AS GIVEN
PROJECT NO: SD-716		REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

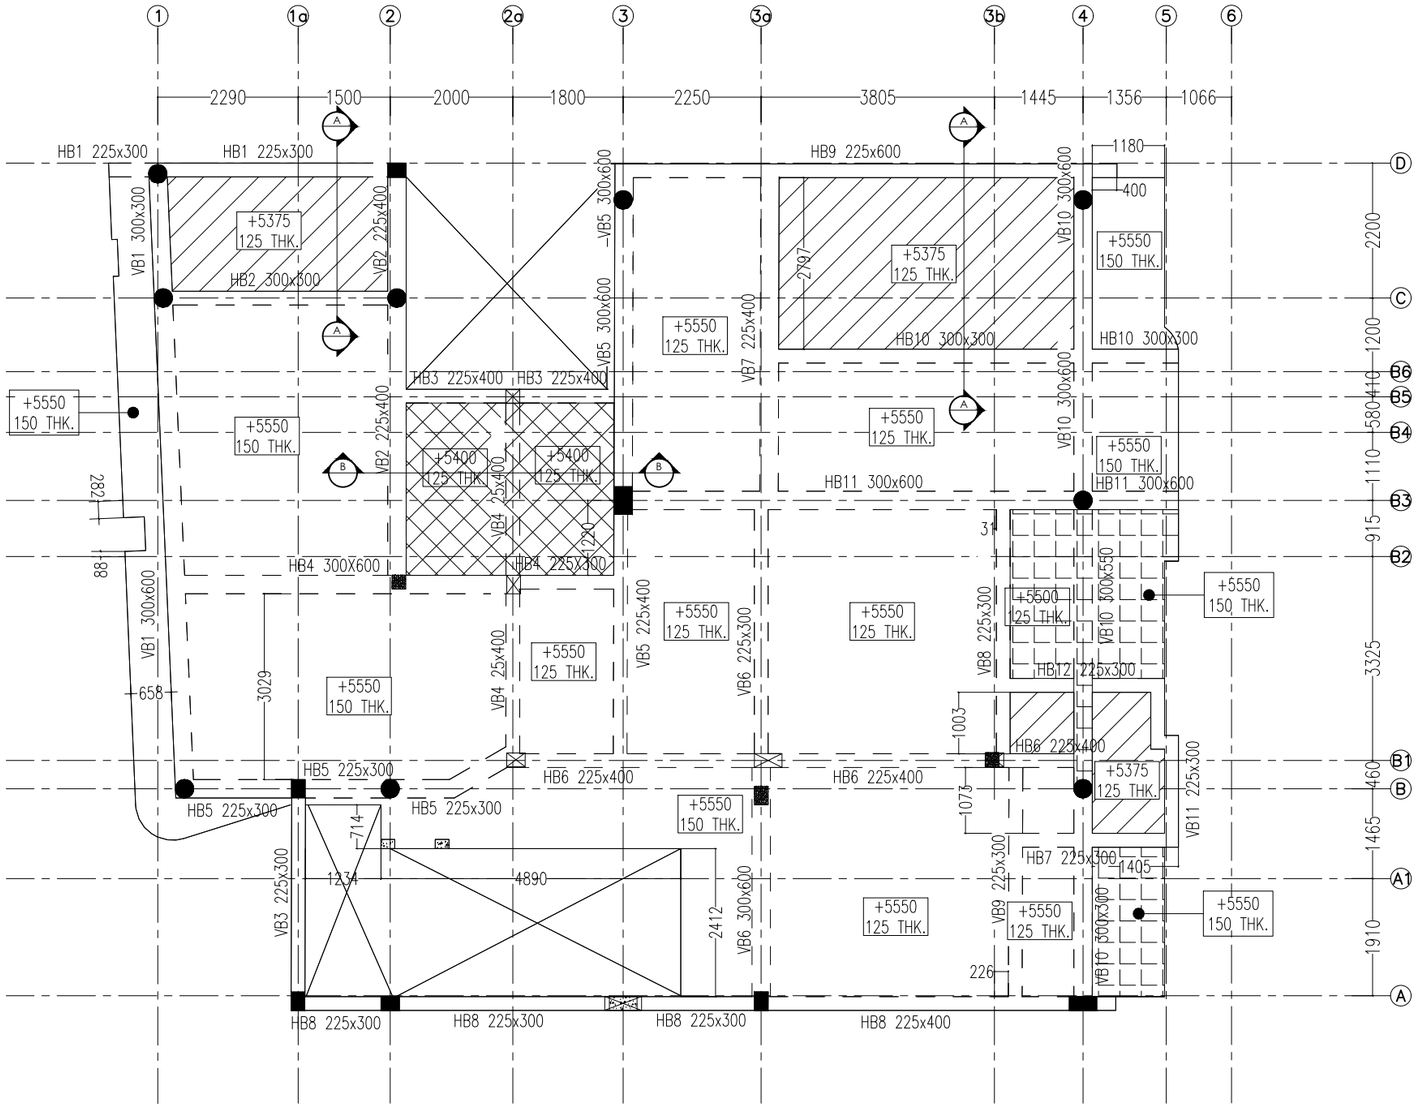

1 FIRST FLOOR GA LAYOUT

Scale: 1:100

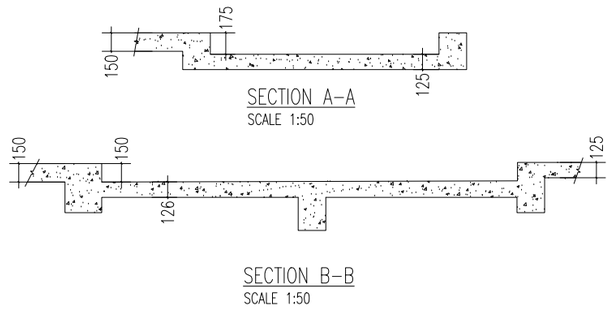

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS


DRAWING TITLE :

FIRST FLOOR GA LAYOUT

AJITH WIJEBANDARA
BSc. Eng. (Hons). C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Haloluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541
AJITH ASSOCIATION STRUCTURAL | CIVIL ENGINEERS


DATE:	SHEET NO:	SCALE:
11 AUG 2025	S–05	AS GIVEN
PROJECT NO: SD–716		REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

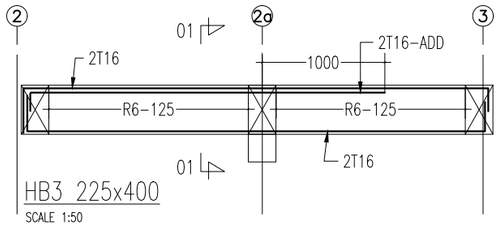


HB3 225x400

SCALE 1:50




SECTION 01-01

SCALE 1:20




HB1/HB5 225x300

SCALE 1:20




HB2 300x300

SCALE 1:20




HB7/HB12 225x300

SCALE 1:20




VB3/VB11 225x300

SCALE 1:20




VB8 225x300

SCALE 1:20




VB9 225x300

SCALE 1:20

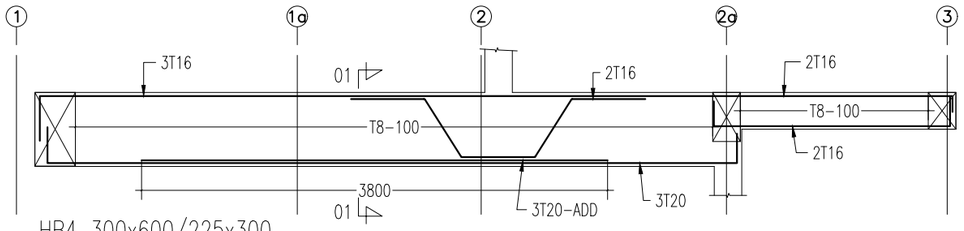


HB4 300x600/225x300

SCALE 1:50




SECTION 01-01

SCALE 1:20

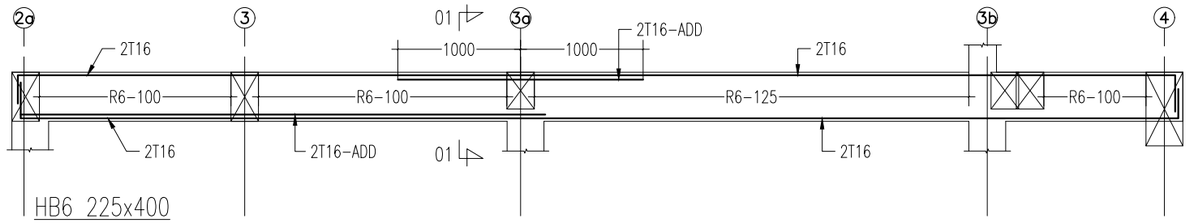


HB6 225x400

SCALE 1:50




SECTION 01-01

SCALE 1:20




SECTION 01-01

SCALE 1:20




SECTION 02-02

SCALE 1:20




SECTION 03-03

SCALE 1:20

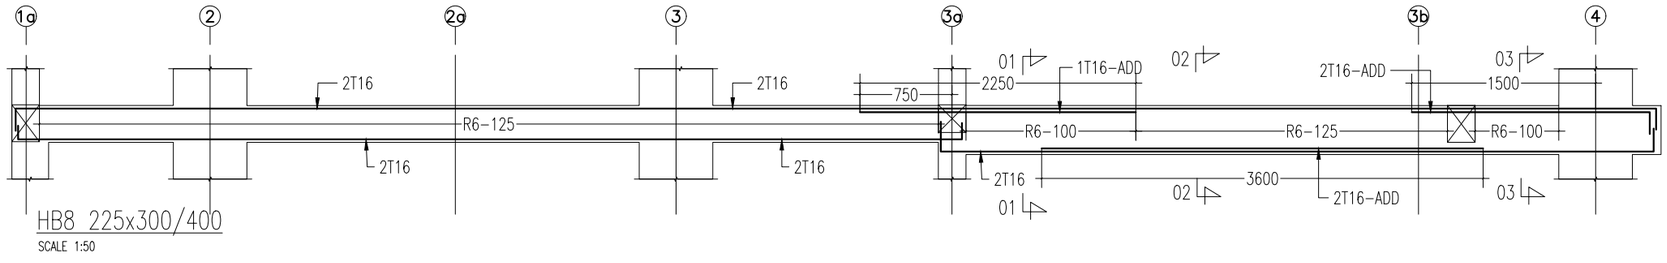


HB8 225x300/400

SCALE 1:50

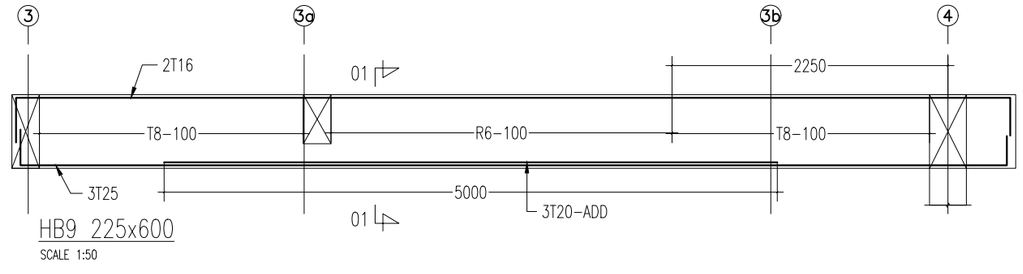


HB9 225x600

SCALE 1:50




SECTION 01-01

SCALE 1:20

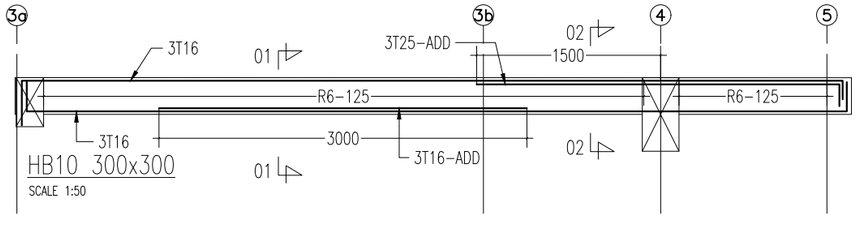


HB10 300x300

SCALE 1:50



SECTION 01-01

SCALE 1:20



SECTION 02-02

SCALE 1:20

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS


DRAWING TITLE :

FIRST FLOOR BEAM DETAIL-1

AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Malaluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541


DATE:	SHEET NO:	SCALE:
11 AUG 2025	S-05a	AS GIVEN
PROJECT NO: SD-716		REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

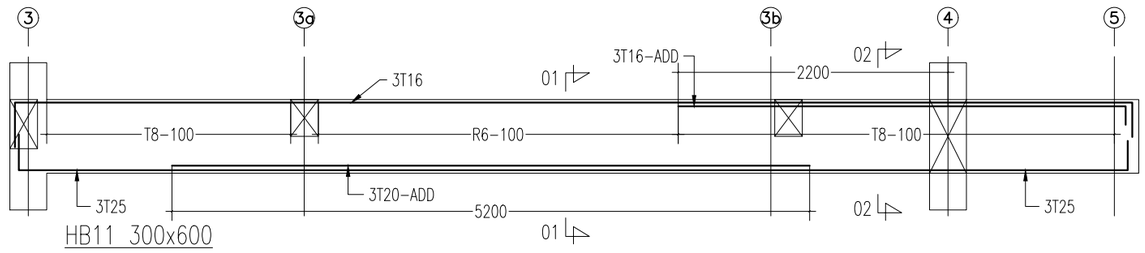


HB11 300x600

SCALE 1:50




SECTION 01-01

SCALE 1:20




SECTION 02-02

SCALE 1:20

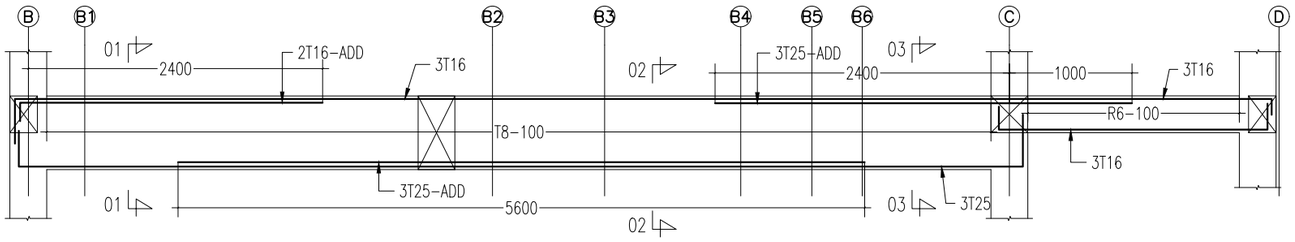


VB1 300x600/300

SCALE 1:50




SECTION 01-01

SCALE 1:20




SECTION 02-02

SCALE 1:20




SECTION 03-03

SCALE 1:20

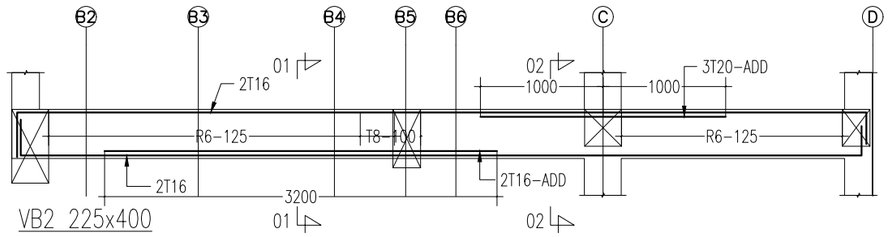


VB2 225x400

SCALE 1:50




SECTION 01-01

SCALE 1:20




SECTION 02-02

SCALE 1:20

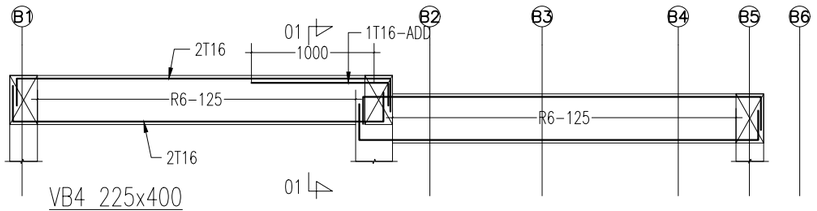


VB4 225x400

SCALE 1:50




SECTION 01-01

SCALE 1:20

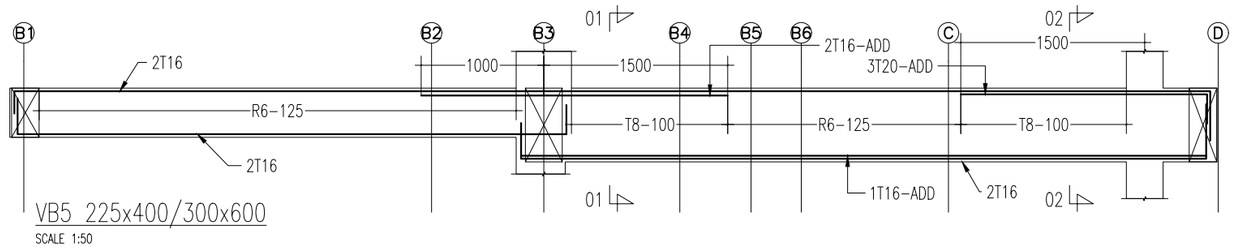


VB5 225x400/300x600

SCALE 1:50




SECTION 01-01

SCALE 1:20




SECTION 02-02

SCALE 1:20

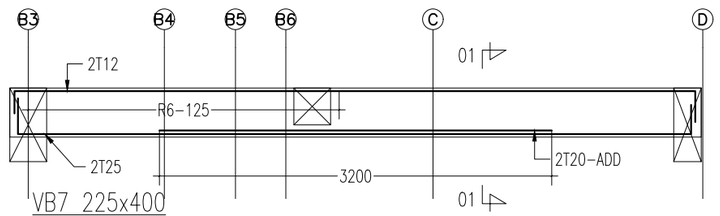

VB7 225x400

SCALE 1:50



SECTION 01-01

SCALE 1:20

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS


DRAWING TITLE :

FIRST FLOOR BEAM DETAIL-2

AJITH WIJEBANDARA
BSc. Eng. (Hons). C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Halolowa, Kandy, Sri Lanka
email : ajith.cengr@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541
AJITH ASSOCIATION STRUCTURAL / CIVIL ENGINEERS


DATE:	SHEET NO:	SCALE:
11 AUG 2025	S-05b	AS GIVEN
PROJECT NO: SD-716		REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction, all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

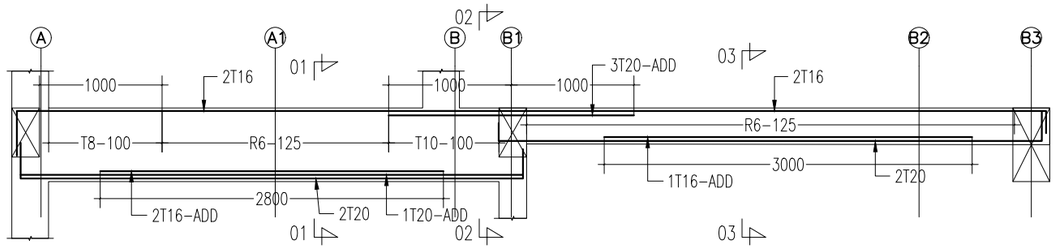


VB6 300x600/225x300

SCALE 1:50




SECTION 01-01

SCALE 1:20




SECTION 02-02

SCALE 1:20




SECTION 03-03

SCALE 1:20

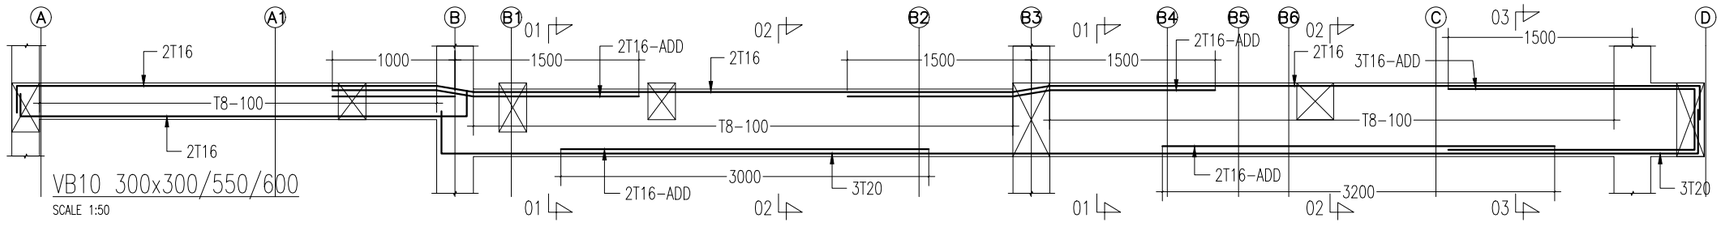


VB10 300x300/550/600

SCALE 1:50




SECTION 01-01

SCALE 1:20



SECTION 02-02

SCALE 1:20



SECTION 03-03

SCALE 1:20

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS

DRAWING TITLE :


FIRST FLOOR BEAM DETAIL-3

AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Haloluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541

AJITH ASSOCIATION
STRUCTURAL / CIVIL ENGINEERS

DATE:	SHEET NO:	SCALE:
11 AUG 2025	S-05c	AS GIVEN
PROJECT NO: SD-716		REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

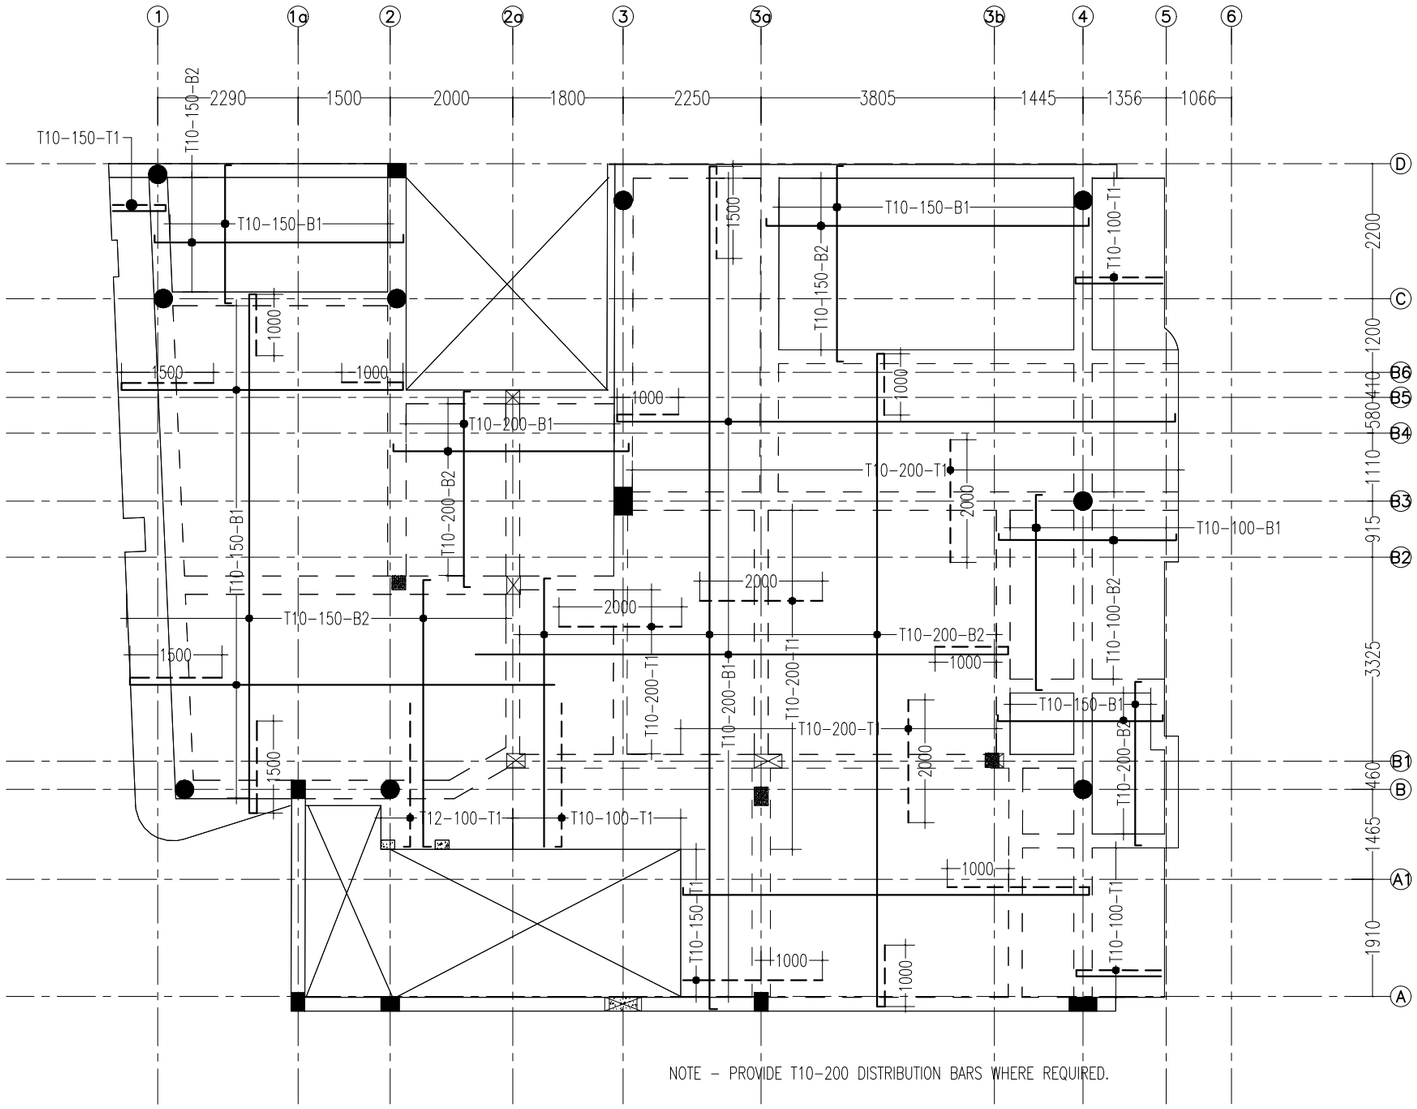

NOTE – PROVIDE T10–200 DISTRIBUTION BARS WHERE REQUIRED.

1 FIRST FLOOR SLAB R/F DETAIL

Scale: 1:100

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS

DRAWING TITLE :


FIRST FLOOR SLAB R/F DETAIL

AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Halaluwa, Kandy, Sri Lanka
email : ajith.cengl@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541


AJITH ASSOCIATION
STRUCTURAL | CIVIL ENGINEERS

DATE:	SHEET NO:	SCALE:
11 AUG 2025	S–05d	AS GIVEN
PROJECT NO: SD–716		REVISION NO: R0


copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

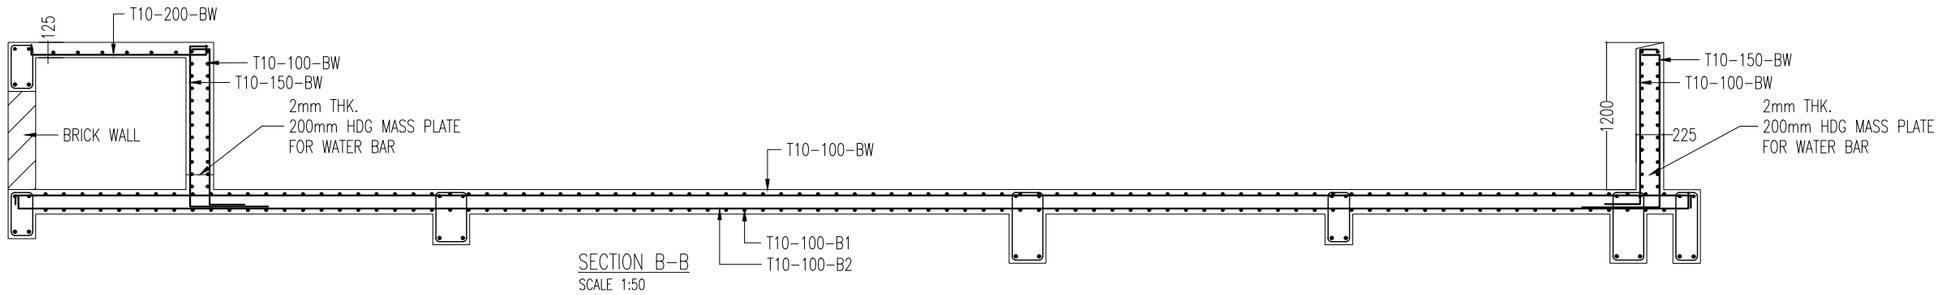


SECTION B-B
SCALE 1:50

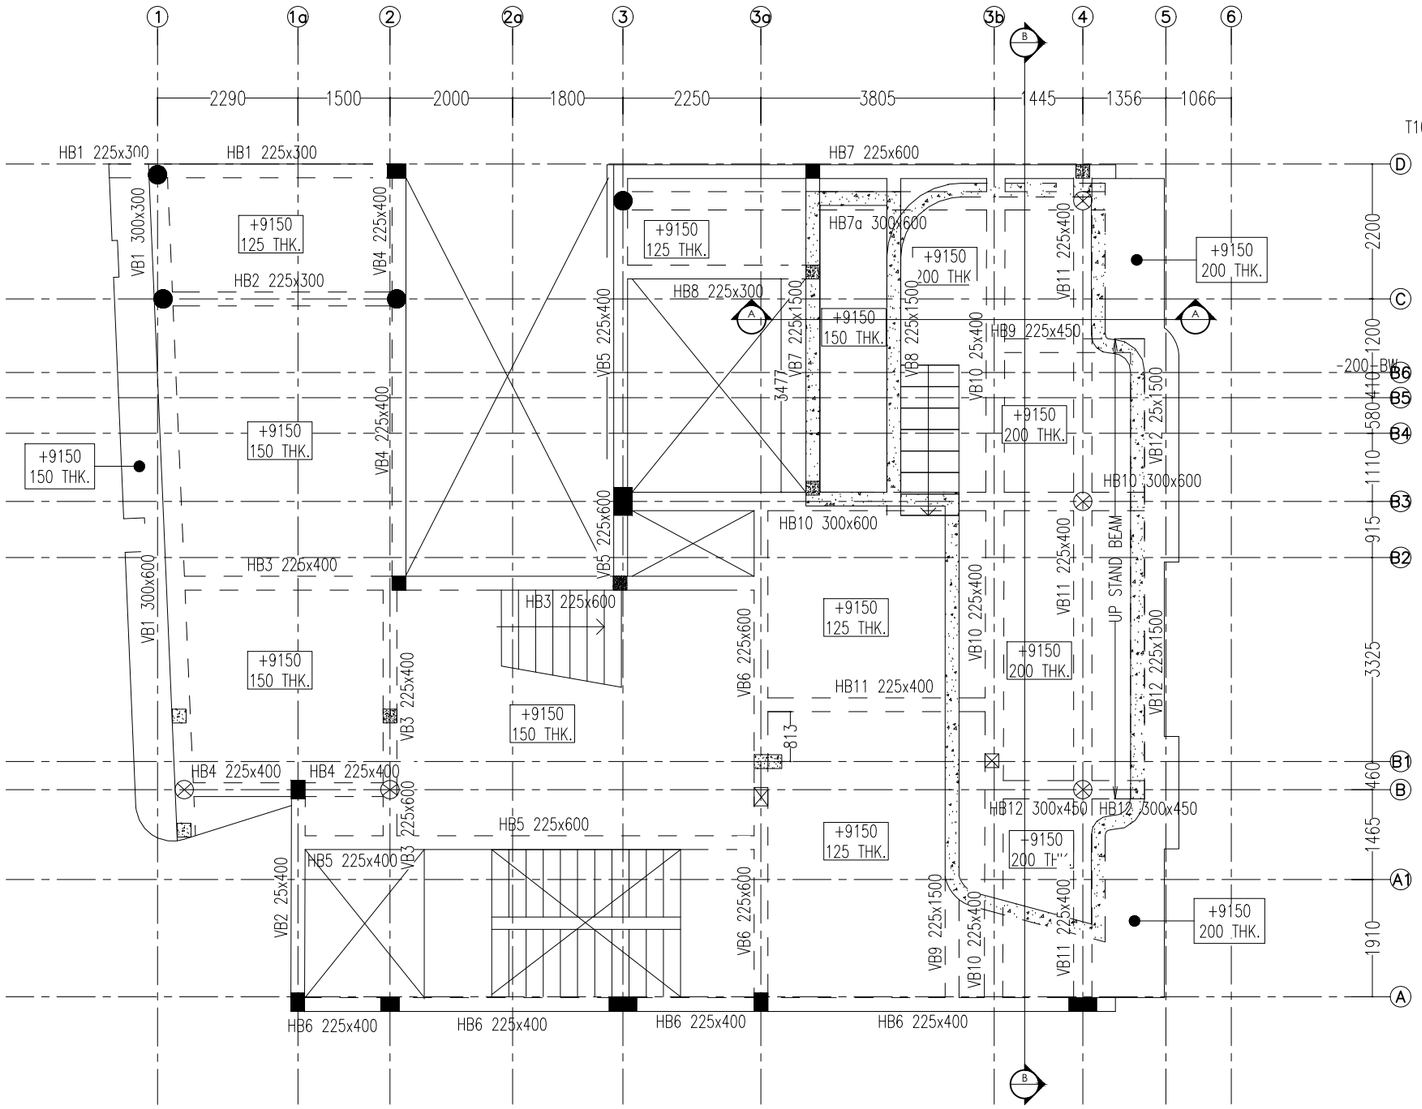

1 SECOND FLOOR GA LAYOUT
Scale: 1:100

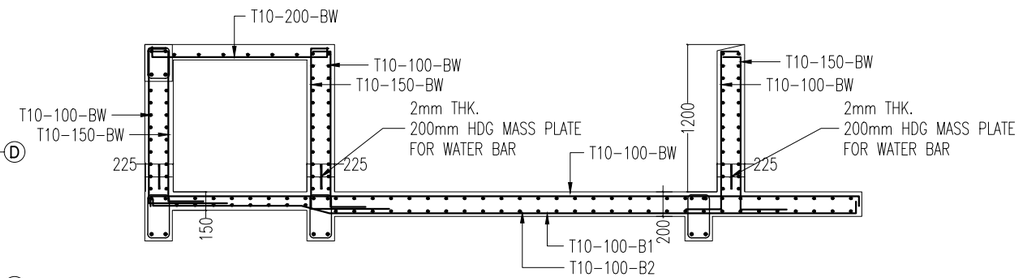

SECTION A-A
SCALE 1:50

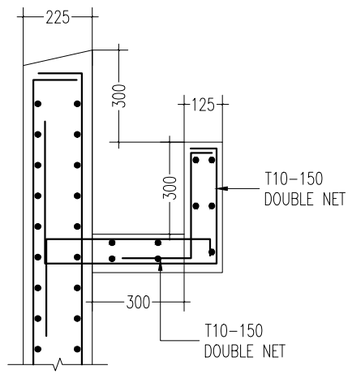

DETAIL-A
SCALE 1:20

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE


PROJECT :
PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS

DRAWING TITLE :
SECOND FLOOR GA LAYOUT

AJITH WIJEBANDARA
BSc. Eng. (Hons). C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Halaluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541


DATE:	SHEET NO:	SCALE:
11 AUG 2025	S-06	AS GIVEN
PROJECT NO: SD-716		REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

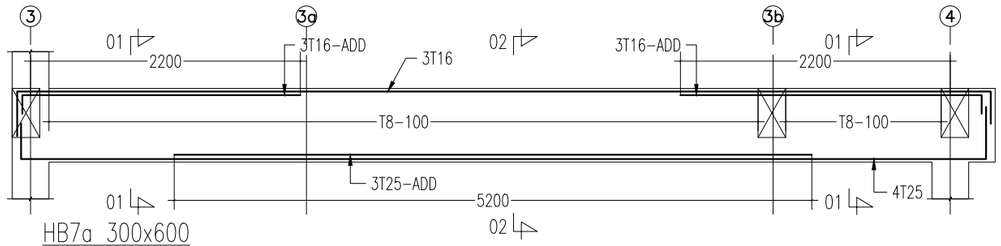


HB7a 300x600

SCALE 1:50




SECTION 01-01

SCALE 1:20




SECTION 02-02

SCALE 1:20




HB1/HB2/HB8 225x300

SCALE 1:20




HB4 225x400

SCALE 1:20




HB7 225x600

SCALE 1:20

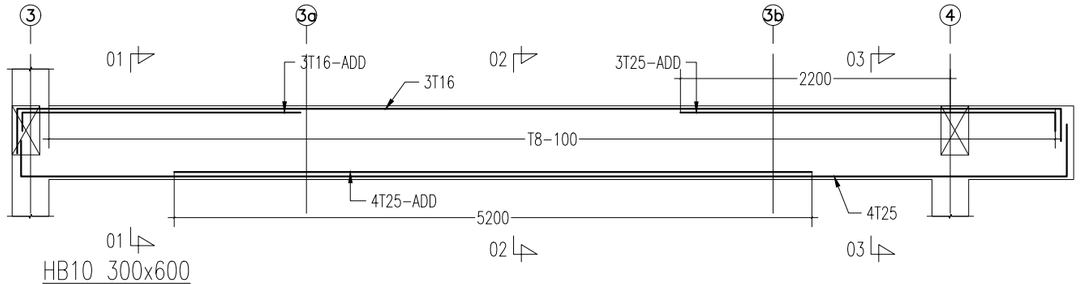


HB10 300x600

SCALE 1:50




SECTION 01-01

SCALE 1:20




SECTION 02-02

SCALE 1:20




SECTION 01-01

SCALE 1:20




HB9/HB12 225x450

SCALE 1:20




HB11 225x400

SCALE 1:20

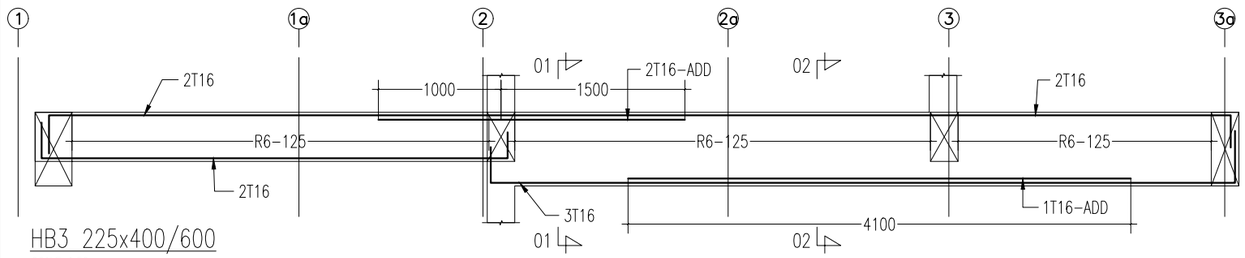

HB3 225x400/600

SCALE 1:50

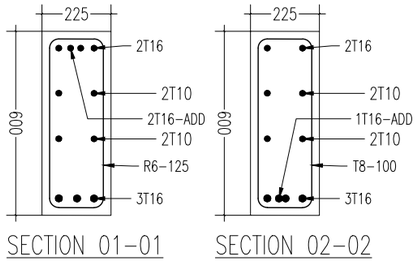


SECTION 01-01

SCALE 1:20


SECTION 02-02

SCALE 1:20

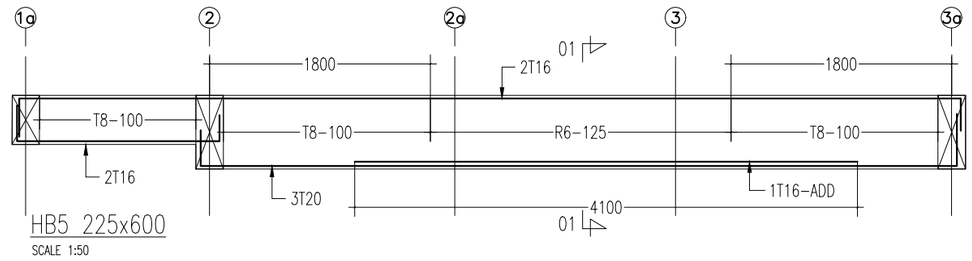


HB5 225x600

SCALE 1:50




SECTION 01-01

SCALE 1:20




SECTION 01-01

SCALE 1:20



SECTION 02-02

SCALE 1:20

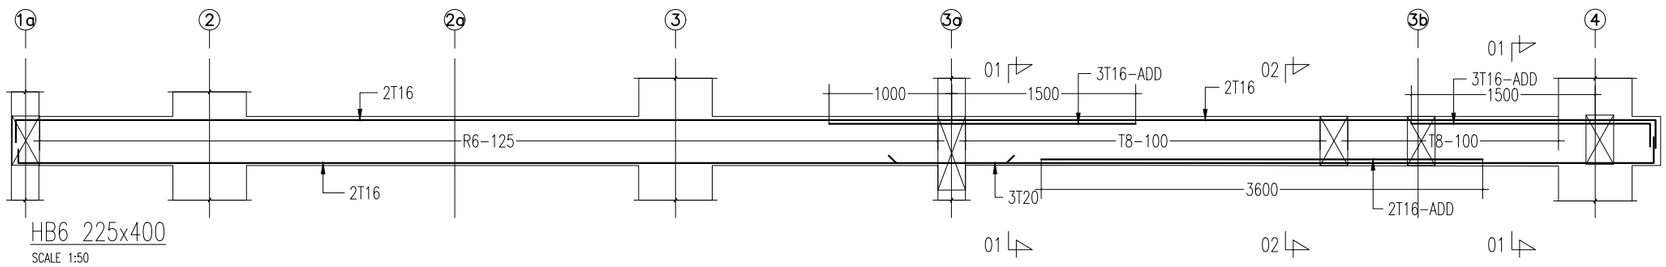

HB6 225x400

SCALE 1:50

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR Mr.CADER AT LAKE GARDENS


DRAWING TITLE :

SECOND FLOOR BEAM DETAIL-1

AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Halolowa, Kandy, Sri Lanka
email : ajith.cenji@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541


DATE:	SHEET NO:	SCALE:
11 AUG 2025	S-06a	AS GIVEN
PROJECT NO: SD-716		REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction, all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

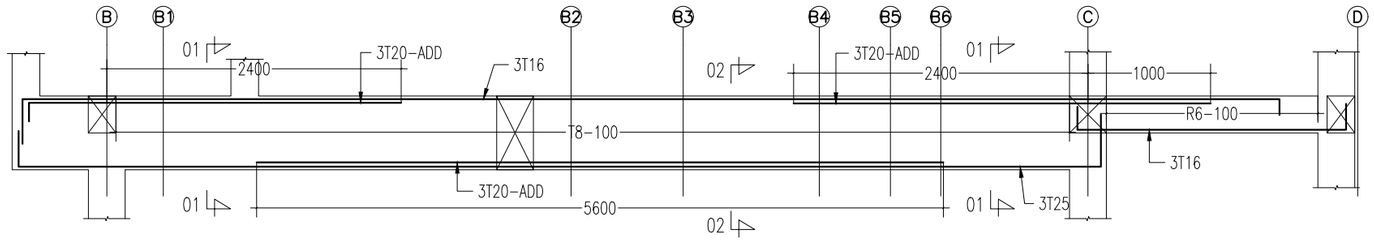

VB1 300x600/300

SCALE 1:50

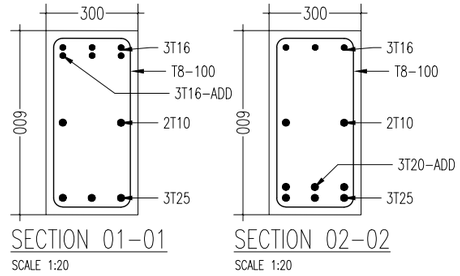


SECTION 01-01

SCALE 1:20


SECTION 02-02

SCALE 1:20

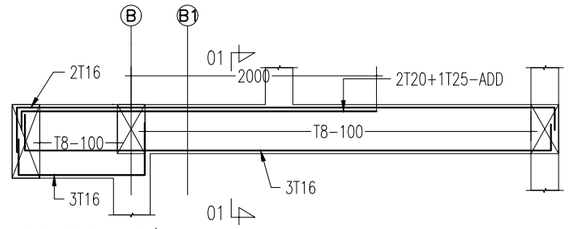


VB3 225x600/400

SCALE 1:50




SECTION 01-01

SCALE 1:20

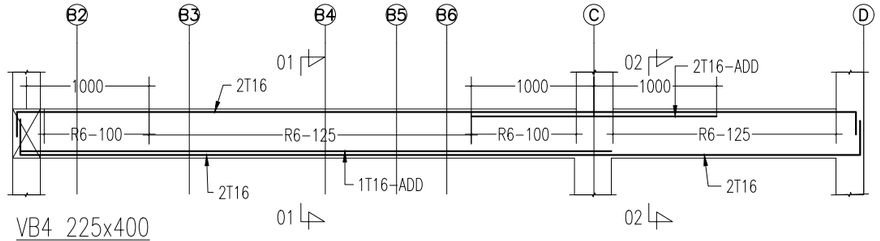


VB4 225x400

SCALE 1:50




SECTION 01-01

SCALE 1:20




SECTION 02-02

SCALE 1:20

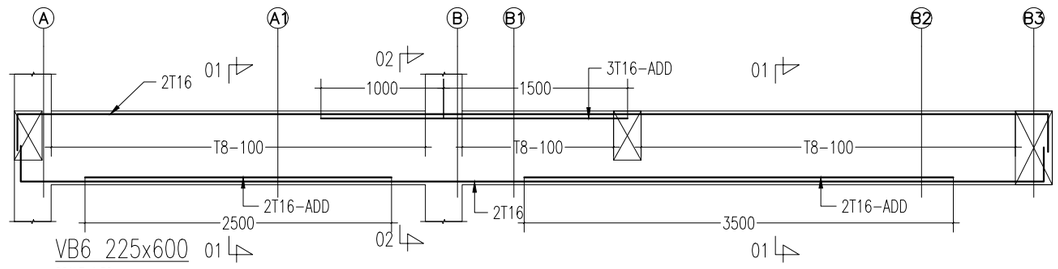


VB6 225x600

SCALE 1:50

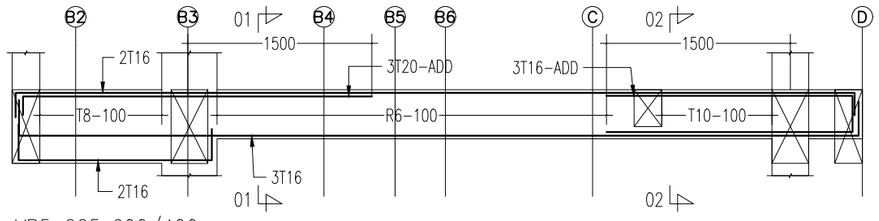


VB5 225x600/400

SCALE 1:50




SECTION 01-01

SCALE 1:20




SECTION 01-01

SCALE 1:20




SECTION 01-01

SCALE 1:20




SECTION 02-02

SCALE 1:20

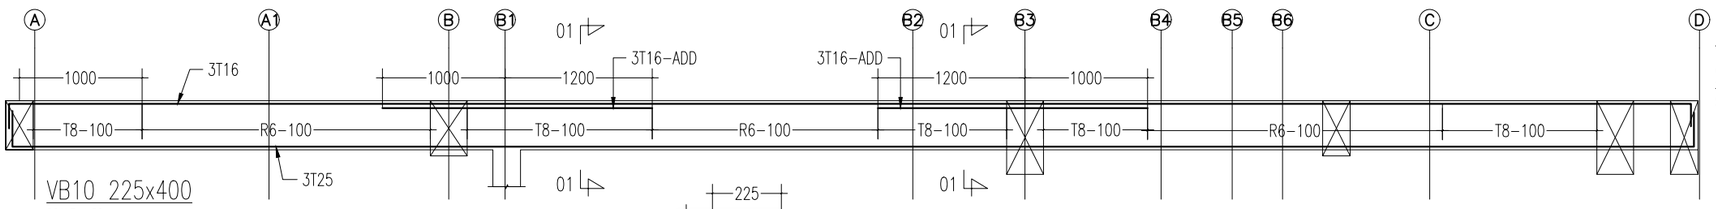


VB10 225x400

SCALE 1:50




SECTION 01-01

SCALE 1:20




SECTION 01-01

SCALE 1:20



SECTION 02-02

SCALE 1:20

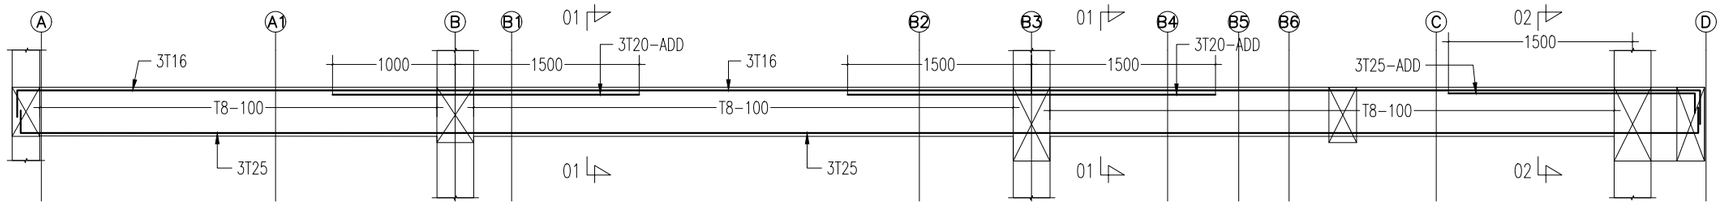

VB11 225x400

SCALE 1:50

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS


DRAWING TITLE :

SECOND FLOOR BEAM DETAIL-2

AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Halaluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541

DATE:	SHEET NO:	SCALE:
11 AUG 2025	S-06b	AS GIVEN
PROJECT NO: SD-716		REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

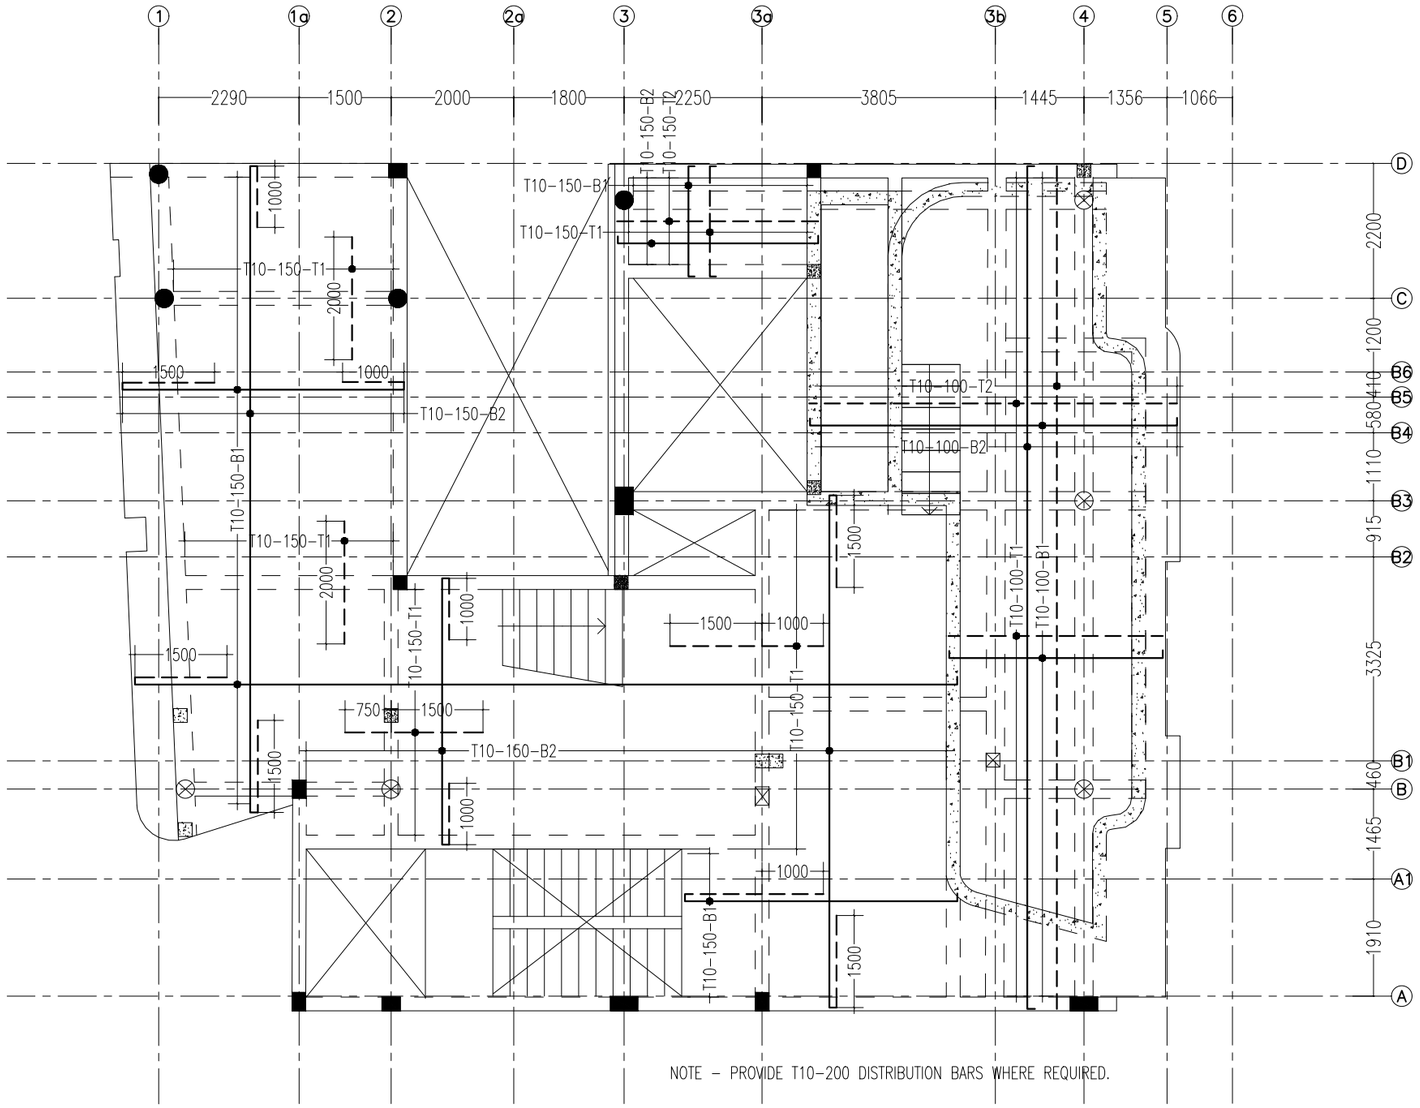

1 SECOND FLOOR SLAB R/F DETAIL

Scale: 1:100

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS


DRAWING TITLE :

SECOND FLOOR SLAB R/F DETAIL

AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Halaluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541

DATE:	SHEET NO:	SCALE:
11 AUG 2025	S-06c	AS GIVEN
PROJECT NO: SD-716		REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

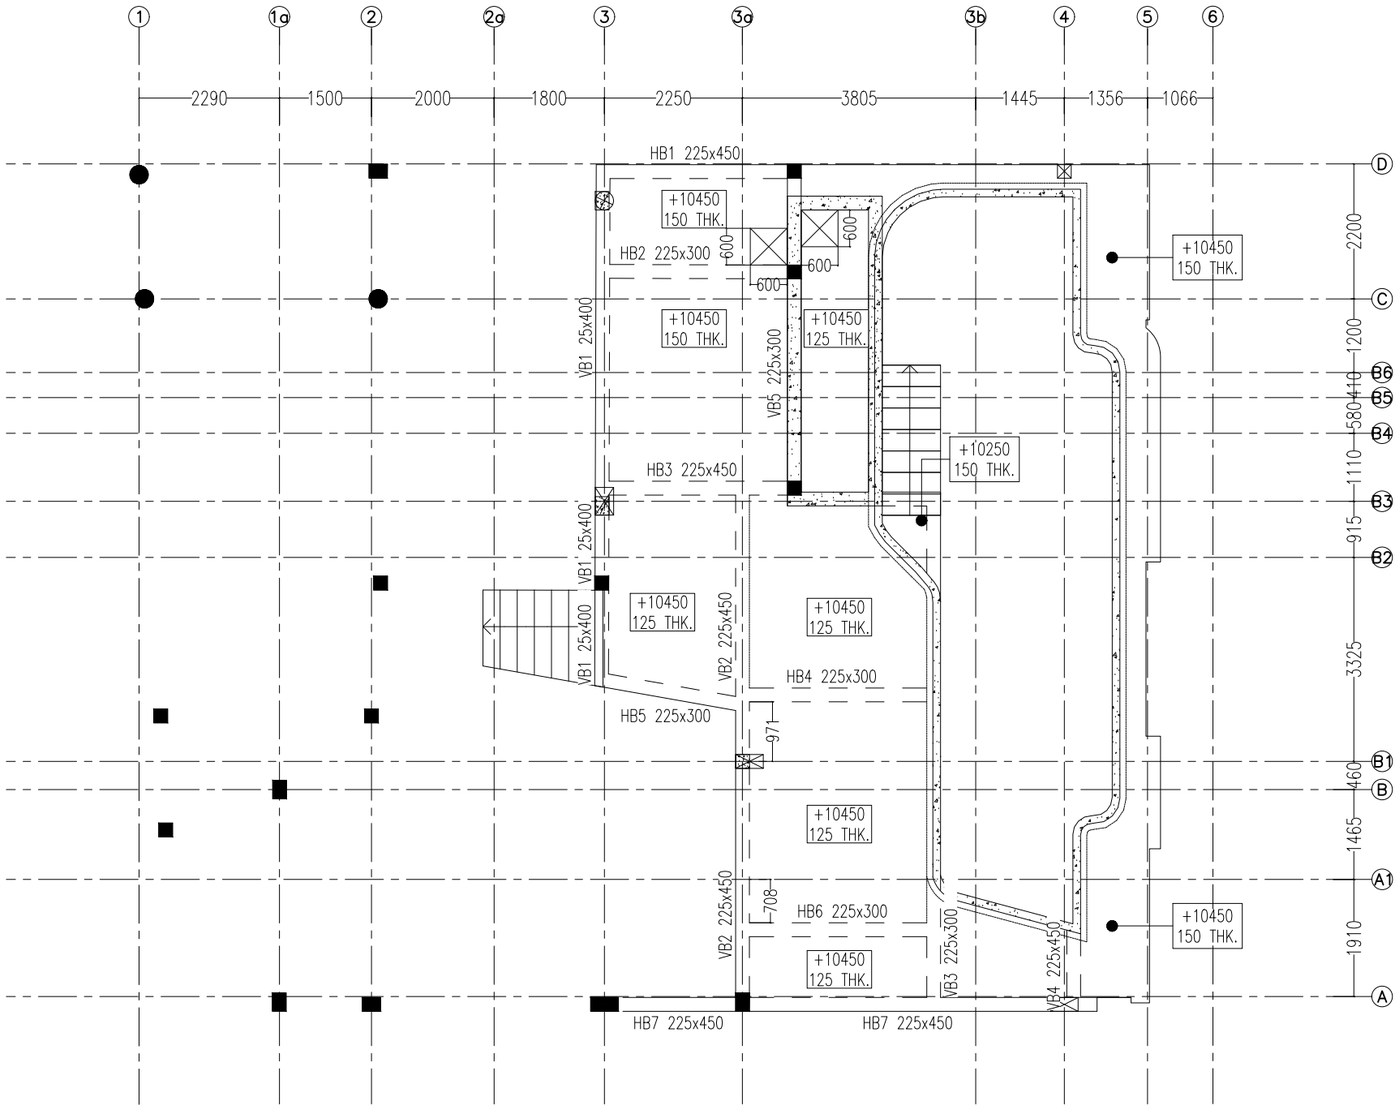

1 POOL DECK LEVEL GA LAYOUT

Scale: 1:100

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS


DRAWING TITLE :


POOL DECK LEVEL GA LAYOUT


AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Haloluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajith.wijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541


DATE:	SHEET NO:	SCALE:
11 AUG 2025	S–07	AS GIVEN
PROJECT NO: SD–716		REVISION NO: R0


copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

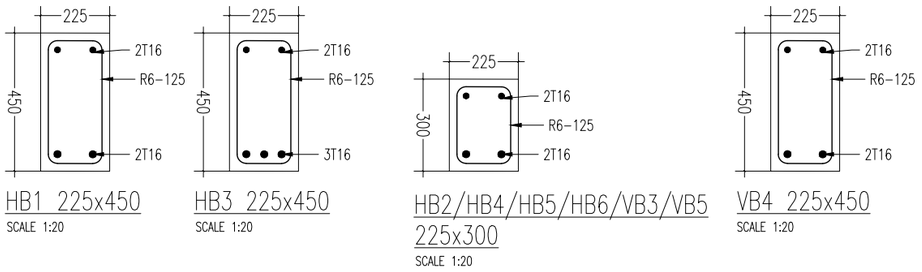


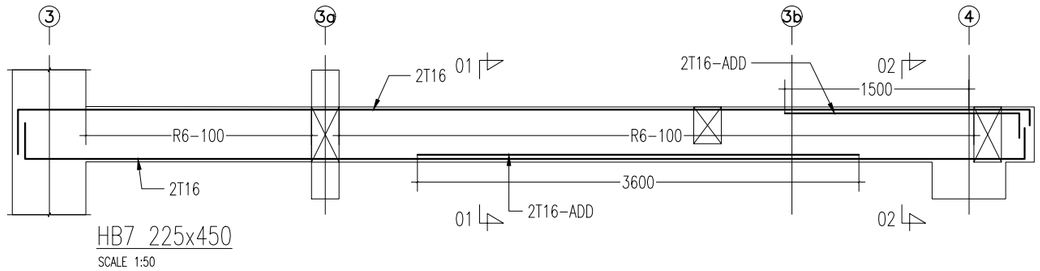


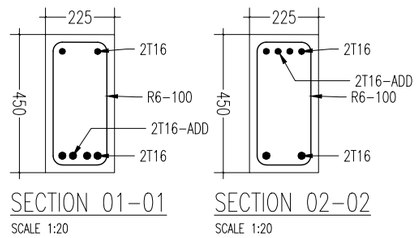

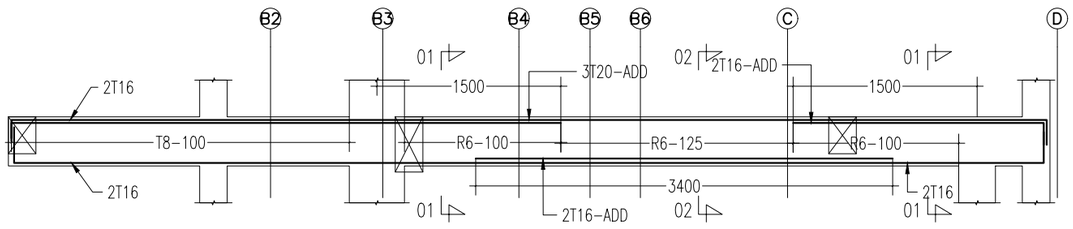

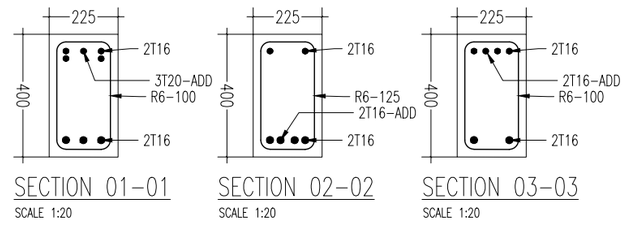

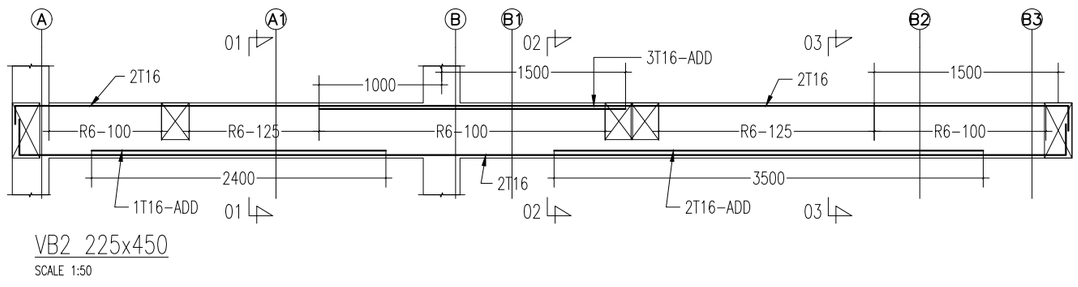

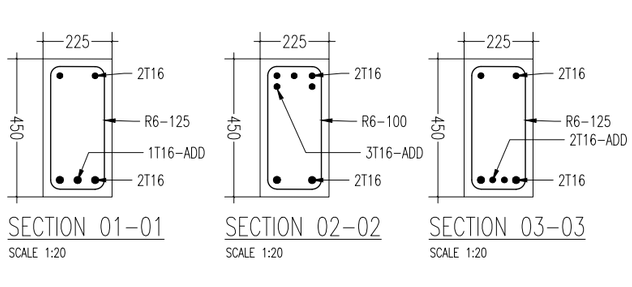

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE


PROJECT :
PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS

DRAWING TITLE :
POOL DECK LEVEL BEAM DETAIL

AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Halaluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541

DATE:	SHEET NO:	SCALE:
11 AUG 2025	S-07a	AS GIVEN
PROJECT NO: SD-716		REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

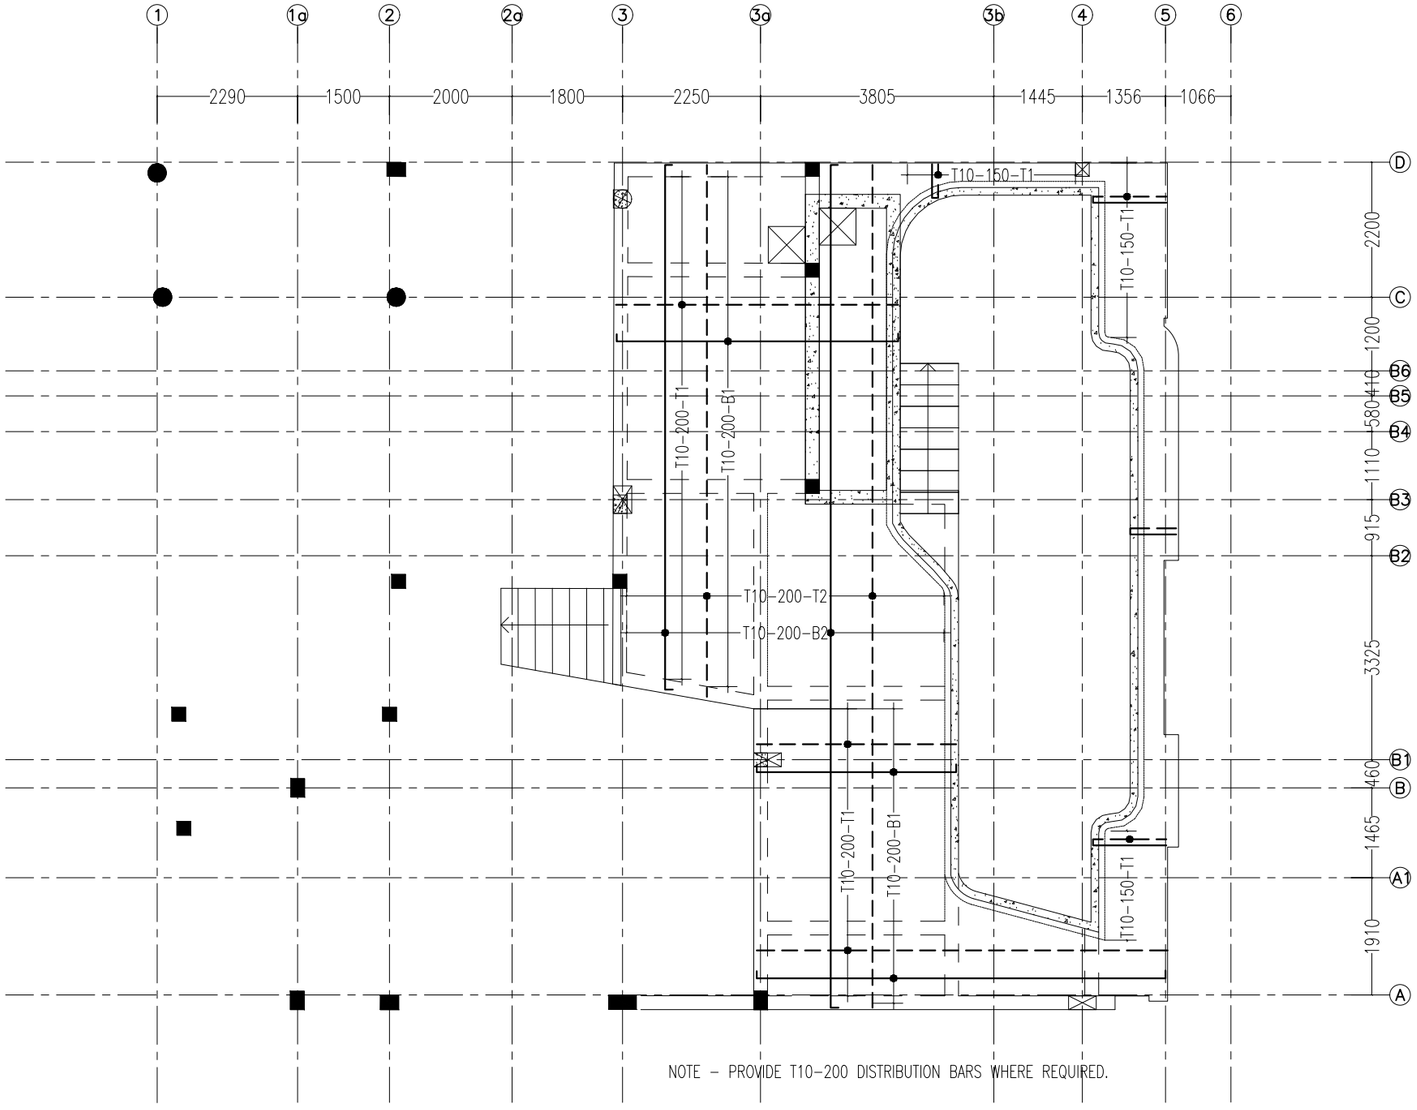

1 POOL DECK SLAB R/F DETAIL

Scale: 1:100

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS


DRAWING TITLE :

POOL DECK SLAB R/F DETAIL

AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Haloluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541
AJITH ASSOCIATION STRUCTURAL / CIVIL ENGINEERS

DATE:	SHEET NO:	SCALE:
11 AUG 2025	S-07b	AS GIVEN
PROJECT NO: SD-716		REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

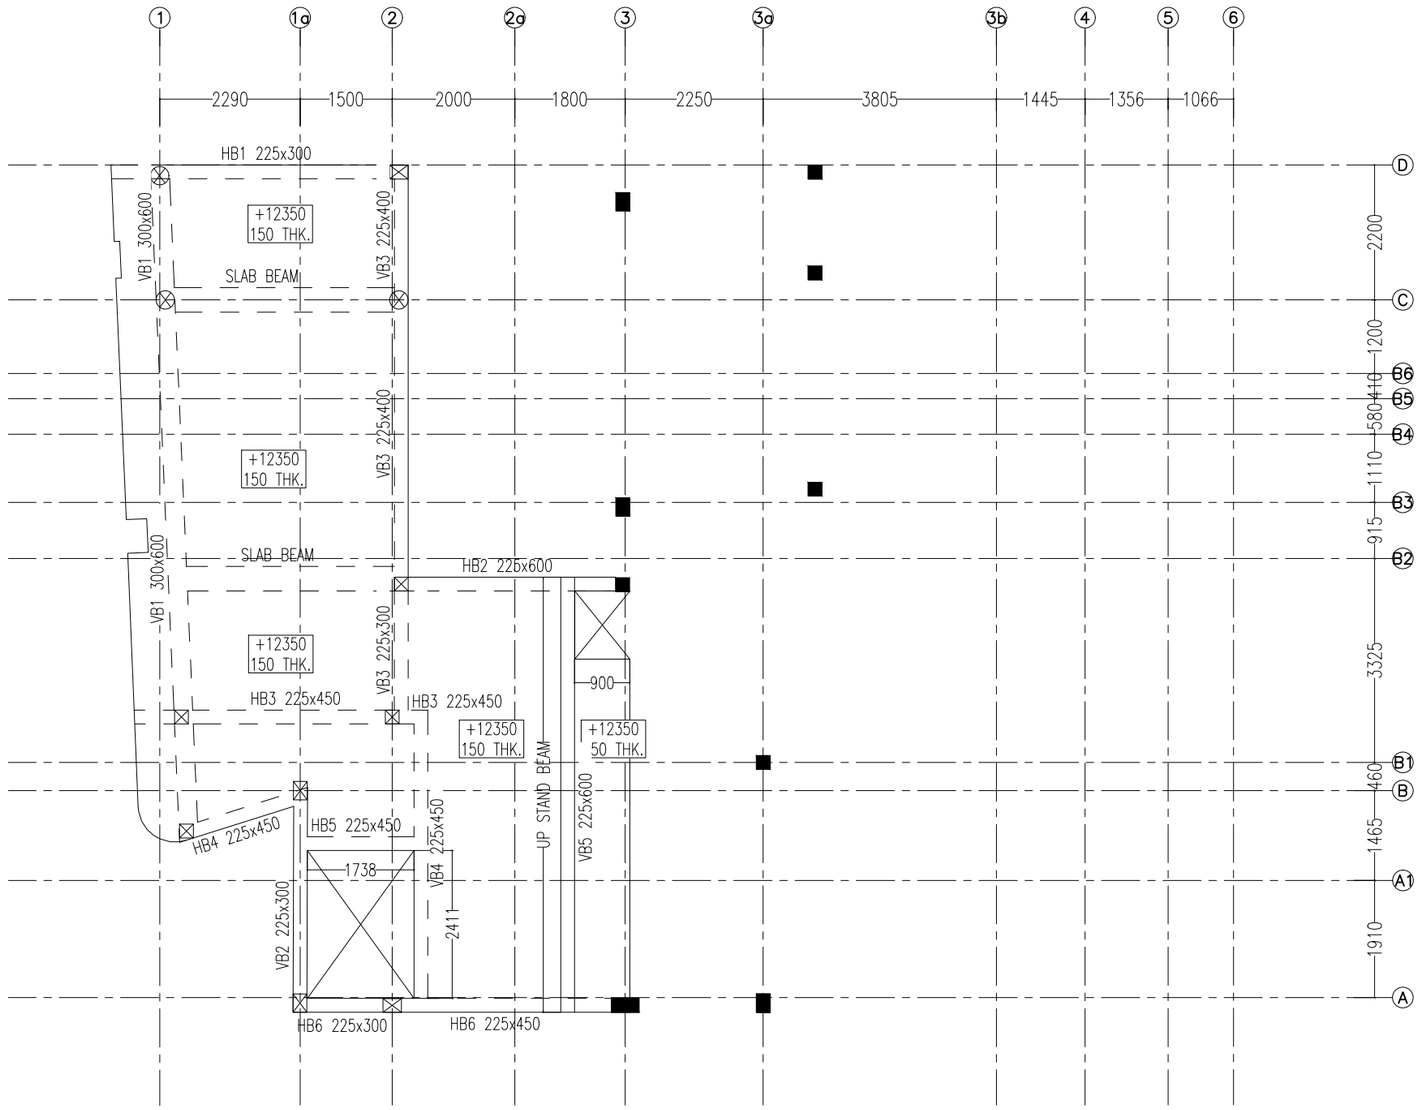

1 ROOF SLAB GA LAYOUT +12350

Scale: 1:100

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :
PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS


DRAWING TITLE :
ROOF SLAB GA LAYOUT +12350

AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Halaluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541

AJITH ASSOCIATION
STRUCTURAL / CIVIL ENGINEERS


DATE: 11 AUG 2025
SHEET NO: S-08
SCALE: AS GIVEN
PROJECT NO: SD-716
REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.




HB5 225x300

SCALE 1:20




VB2 225x300

SCALE 1:20




SLAB BEAM

SCALE 1:20




HB2 225x300

SCALE 1:20

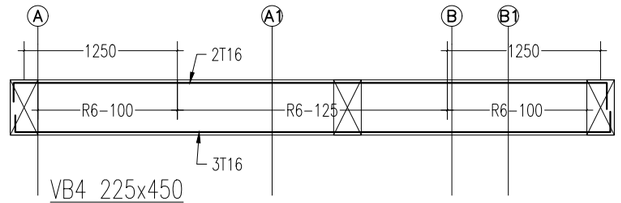


VB4 225x450

SCALE 1:50

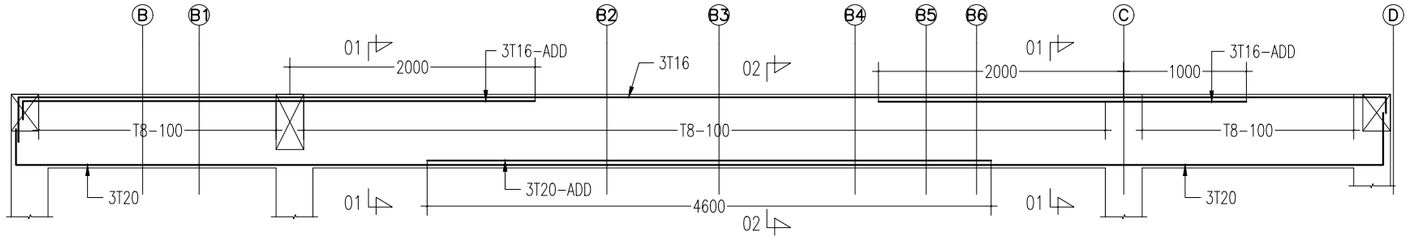


VB1 300x600

SCALE 1:50

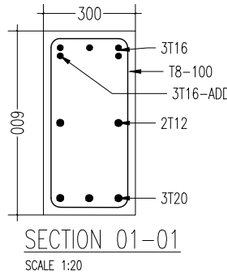


SECTION 01-01

SCALE 1:20

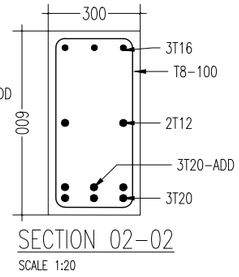


SECTION 02-02

SCALE 1:20

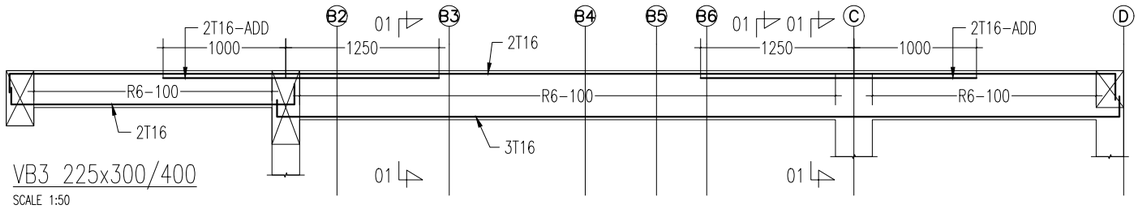


VB3 225x300/400

SCALE 1:50




SECTION 03-03

SCALE 1:20

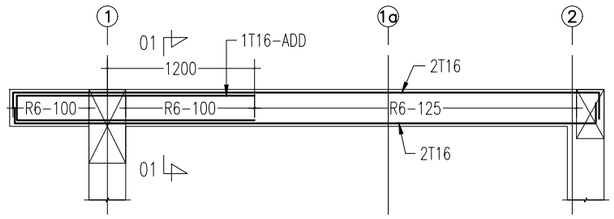


HB1 225x300

SCALE 1:50

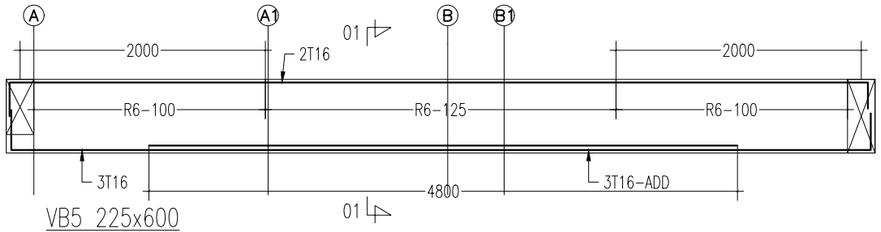


VB5 225x600

SCALE 1:50




SECTION 01-01

SCALE 1:20




SECTION 01-01

SCALE 1:20




SECTION 01-01

SCALE 1:20

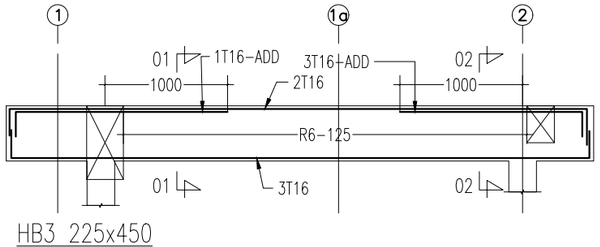


HB3 225x450

SCALE 1:50




SECTION 01-01

SCALE 1:20



SECTION 02-02

SCALE 1:20

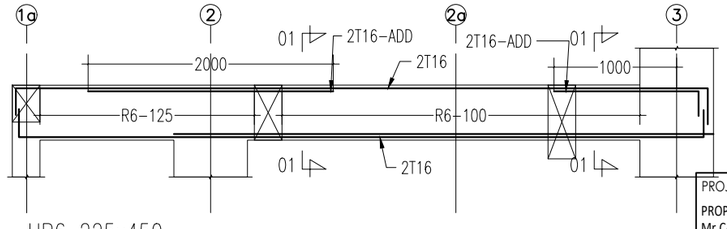

HB6 225x450

SCALE 1:50

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS


DRAWING TITLE :

ROOF SLAB GA LAYOUT +12350

AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Haloluwa, Kandy, Sri Lanka
email : ajith.cenj@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541

DATE:	SHEET NO:	SCALE:
11 AUG 2025	S-08a	AS GIVEN
PROJECT NO: SD-716		REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

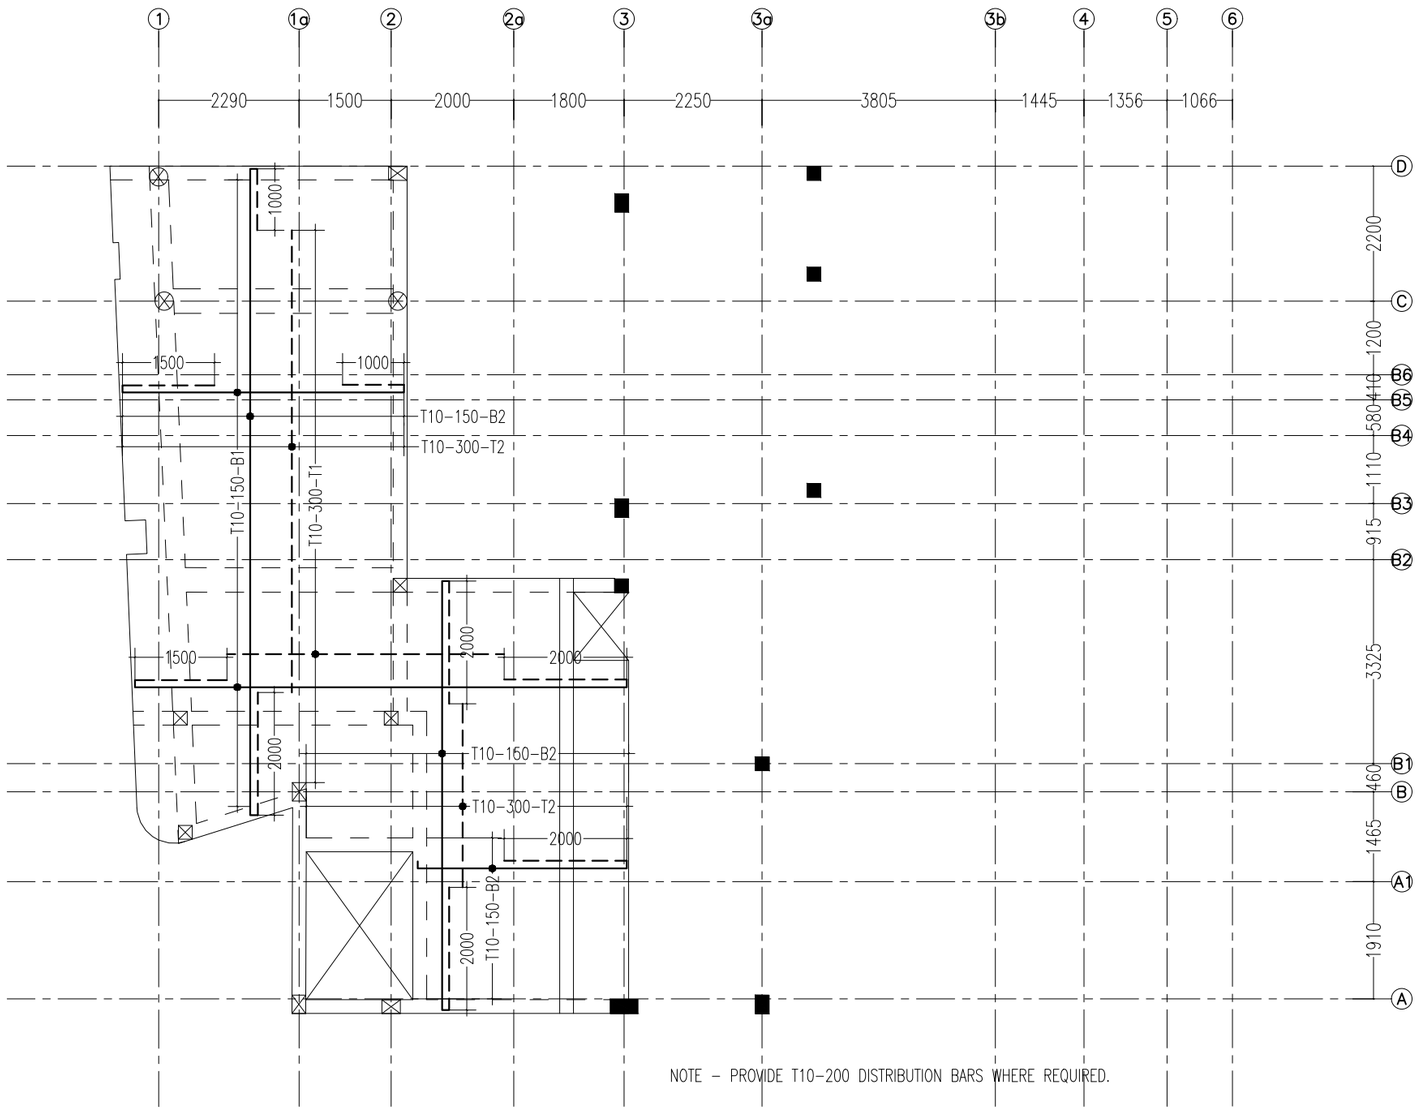

1 ROOF SLAB R/F DETAIL

Scale: 1:100

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS

DRAWING TITLE :

ROOF SLAB R/F DETAIL

AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Halaluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541
AJITH ASSOCIATION STRUCTURAL / CIVIL ENGINEERS

DATE: 11 AUG 2025


SHEET NO: S-08b

SCALE: AS GIVEN

PROJECT NO: SD-716


REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.

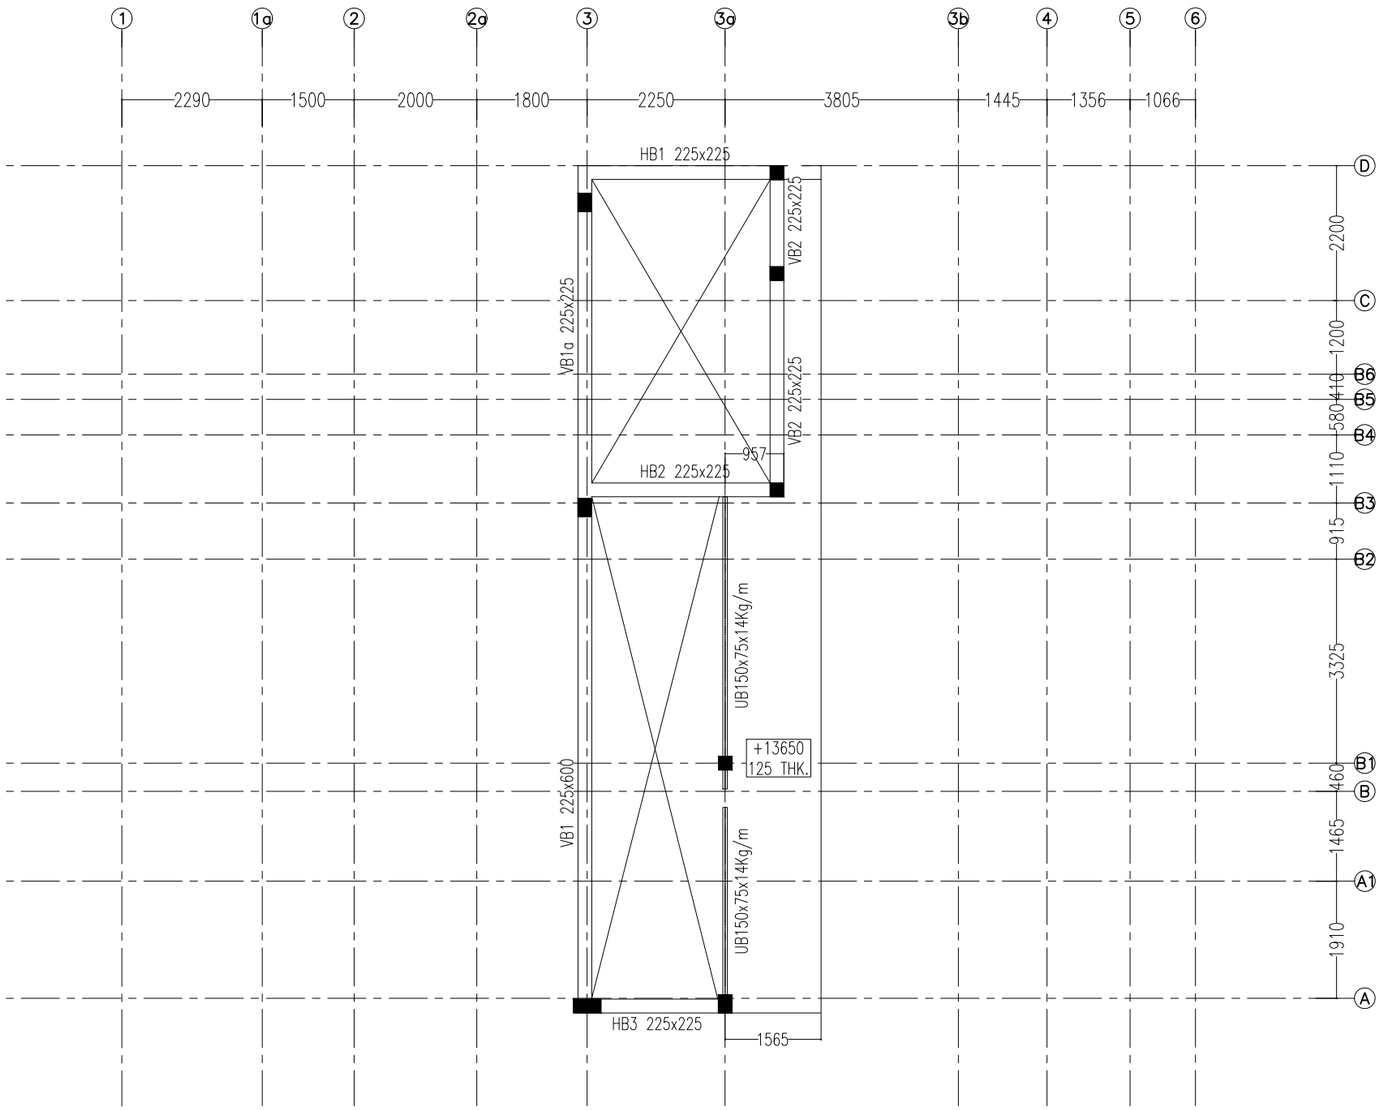


1 ROOF SLAB GA LAYOUT +13650

Scale: 1:100




HB1/HB2/HB3/VB1a/VB2 225x300

SCALE 1:20



VB1 225x300

SCALE 1:20

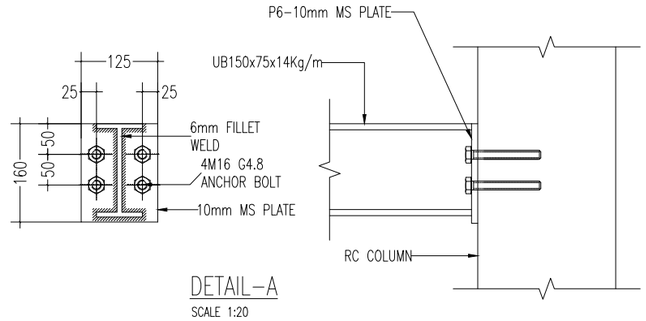

DETAIL-A

SCALE 1:20

General Notes:

1. ALL DIMENSIONS ARE IN METRIC.
2. DO NOT SCALE DRAWING. ONLY WRITTEN DIMENSION TO BE FOLLOWD.
3. ALL DIMENSIONS AND DETAILS SHOULD BE CHECKED AT SITE BEFORE COMMENCING WORK
4. ALL GENENRAL NOTE TO BE READ AND CONJUNCTION WITH S 00GENERAL NOTES
5. CONCRETE SHOULD BE
   a. FOUNDATION- GRADE 30 (1:1:2)
   b. SUPER STRUCTURE - GRADE 30(1:1:2)
   c. FLOOR CONCRETE- GRADE 20 (1:2:4)
   d. LIQUIDS RETAINING STRUCTURES- GRADE 35 A
6. COVER TO THE R/F IS
   SUPER STRUCTURE-25mm clear cover to the link
   FOUNDATION, WATER RETAINING STRUCTURE-40mm
7. REINFORCEMENT NOTATIONS
   T10 @150-T1
   10- BAR SIZE IN mm
   150- SPACING AT CENTRE TO CENTRE
   T1- BAR LOCATION (TOP OR BOTTOM)
8. CHARACTERISTIC STRENGTH
   TOR STEEL - 500 N/mm2
   MILD STEEL - 250 N/mm2

CONSTRUCTION ISSUE

PROJECT :

PROPOSED RESIDENCE DEVELOPMENT FOR
Mr.CADER AT LAKE GARDENS

DRAWING TITLE :

ROOF SLAB GA LAYOUT +13650

AJITH WIJEBANDARA
BSc. Eng. (Hons), C. Eng. MIE (SL) (M-6686)
Consultant Civil, Structural Engineers and Project Managers.
166/1, Pallemulla, Haloluwa, Kandy, Sri Lanka
email : ajith.ceng@gmail.com
skype : ajithwijebandara
Mob: + 94 773 976 129 Tel: + 94 814 287 541

AJITH ASSOCIATION
STRUCTURAL | CIVIL ENGINEERS

DATE:	SHEET NO:	SCALE:
11 AUG 2025	S-09	AS GIVEN
PROJECT NO: SD-716		REVISION NO: R0

copyright of designs shown are retained by Ajith Wijebandara and authority is required for any reproduction. all dimensions must be checked & co-related with the structural drawings and any ambiguity shall be immediately brought to the notice of the Engineer before commencement of work.